

The Com-Pak Max

The professional's choice for smaller areas



Features and Benefits

- Thermal Safeguard
 - High temperature manual reset: turns off heater if normal operating temperatures are exceeded
- Horizontal or vertical grill mounting options
- Durable steel tube and plate constructed heating element
- Powder coat paint process eliminates sharp metal edges
- Wall can designed for ease of installation

General Information:

The Com-Pak Max provides all the benefits of our popular Com-Pak Plus, but features more durable components and increased versatility. This multi-watt heater is perfect as a single unit for smaller areas such as a bathroom or small bedroom, or as multiple units for larger areas such as a master bedroom, living room or family room. Choose from a vertical grill with the option of a built-in thermostat, or a horizontal, register style grill without a built-in thermostat, to suit your project needs. Cadet recommends a wall-mounted thermostat for optimum performance.


Architectural Information:

Fan forced electric air heaters shall be ETL listed, factory dual field rated 208V/240V. The painted wall mounting can for this heater is made from 20-gauge sheet steel with six electrical knockouts and 34 cubic inches for a wiring compartment. Each complete heater shall be of unitized construction and attach to the wall can with a single screw and shall be self-contained and completely separate from the wall mounting can. Element construction is a coiled nichrome heating wire sealed in a steel sheath with steel fins brazed to the sheath. Heating unit shall include a 16-amp rating at 240V, high temperature manual reset limit switch. A two stage centrifugal blower shall be driven by an impedance protected motor. The motor shall be totally isolated from the heating chamber. Metal grills shall be of one piece, constructed of 22-gauge steel and finished with a powder coat paint system.

Carton Details

Heater Assembly Only Carton

DIMENSIONS | 12"W x 7.5"H x 5.25"D
PALLET QTY. | 100
CUBE | .27

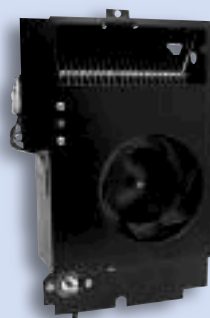

HEATER ASSEMBLY WITH THERMOSTAT



WALL CAN



PHONE 360.693.2505
FAX 360.694.8668
WEB www.cadetco.com

Technical Information:

The wall can and the Com-Pak Max heater assembly may be installed vertically or horizontally. The Com-Pak Plus grill may be installed vertically or horizontally. The Com-Pak Max register style grill may only be installed horizontally. The (vertical installation) Com-Pak Max may be ordered with or without a built-in thermostat. For optimal comfort use a Cadet electronic thermostat. Fan heaters and thermostats work best when installed on an inside wall. UL requires heater to be placed a minimum distance of 6" from adjacent surfaces and 4.5" from the floor. Manufacturer recommends installation 12" from all surfaces. A 3' minimum clearance is recommended for furniture or other objects placed directly in front of heater. Not approved for ceiling mount.


NOTE: Manufacturer recommends installing heater assembly after walls are finished. Heater must be cleaned every six months minimum.

Ordering Information:


The heater assembly, Com-Pak Plus grill and Com-Pak Max register style grill are all separate components and shall be ordered separately. Suffix "T" in model number denotes built-in single pole thermostat. Model numbers without a "T" require a thermostat. Recommended for elevations under 10,000 feet. Available in white or almond.

UPC Code			WATTS		AMPS		
Part#	Model#	Description	240V	208V	240V	208V	Wt./Lbs
027418 65001 6	CM162	Heater Assembly Only—No Thermostat	700/900/1600	525/675/1200	2.92/3.75/6.67	2.52/3.25/5.77	4.25
027418 65002 3	CM162T	Heater Assembly Only—w/ Thermostat	700/900/1600	525/675/1200	2.92/3.75/6.67	2.52/3.25/5.77	4.5
027418 65003 0	CM202	Heater Assembly Only—No Thermostat	500/800/1200/1500/2000	375/600/900/1125/1500	2.08/3.33/5.0/6.25/8.33	1.80/2.88/4.33/5.41/7.21	4.25
027418 65004 7	CM202T	Heater Assembly Only—w/ Thermostat	500/800/1200/1500/2000	375/600/900/1125/1500	2.08/3.33/5.0/6.25/8.33	1.80/2.88/4.33/5.41/7.21	4.5
027418 65008 5	CM208	Heater Assembly Only—No Thermostat		500/800/1200/1500/2000		2.40/3.85/5.77/7.21/9.62	4.25
027418 65009 2	CM208T	Heater Assembly Only—w/ Thermostat		500/800/1200/1500/2000		2.40/3.85/5.77/7.21/9.62	4.5


UPC Code				
Part#	Model#	Description	Wt./Lbs	
027418 67061 8	CC	C Wall Can Single Pack	2.75	
027418 67060 1	CC10	C Wall Can, 10 Pack	22.5	
027418 67079 3	CGW	C Grill w/ Parts, White, Vertical	1.5	
027418 67081 6	CGW10	C Grill w/ Parts, White, 10 pack, Vertical	12.25	
027418 67075 5	CGA	C Grill w/ Parts, Almond, Vertical	1.5	
027418 67080 9	CGA10	C Grill w/ Parts, Almond, 10 pack, Vertical	12.25	
027418 65005 4	CMGW	Register Style Grill w/ Parts, White	2.0	
027418 65006 1	CMGW5	Register Style Grill w/ Parts, White, 5 pack	7.5	
027418 65015 3	CMGA	Register Style Grill w/ Parts, Almond	2.0	
027418 65016 0	CMGA5	Register Style Grill w/ Parts, Almond, 5 pack	7.5	
027418 67063 2	CTT1W	Single Pole Field Mount Thermostat Kit, 17 amp, White	.25	
027418 67064 9	CTT2W	Double Pole Field Mount Thermostat Kit, 17 amp, White	.25	
027418 67065 6	CTT1A	Single Pole Field Mount Thermostat Kit, 17 amp, Almond	.25	
027418 67066 3	CTT2A	Double Pole Field Mount Thermostat Kit, 17 amp, Almond	.25	
027418 67067 0	CTTP	Tamper Proof Field Mount SP Thermostat Kit, 22 amp	.25	
027418 06390 8	CS4MA	4" Surface Mount Metal Adapter C Series, Almond	3.5	
027418 06395 3	CS4MW	4" Surface Mount Metal Adapter C Series, White	3.5	
027418 67100 4	CAMA	18.5" x 22" Metal Adapter Plate C Series, Almond	3.5	
027418 67105 9	CAMW	18.5" x 22" Metal Adapter Plate C Series, White	3.5	
027418 67110 3	SAMA	12" x 21.25" Metal Adapter Plate, Almond	2	
027418 67115 8	SAMW	12" x 21.25" Metal Adapter Plate, White	2	

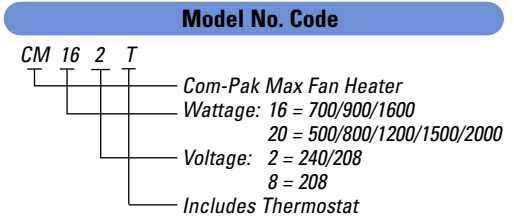



*Views shown below require horizontal mounting, using the register style grill and models without a built-in thermostat. If vertical mounting is preferred, use model CGA or CGW.



***Horizontal Grill Dimensions:**
 12"W x 9"H



***Wall Can Dimensions:**
 11 1/2"W x 7 7/8"H x 4"D

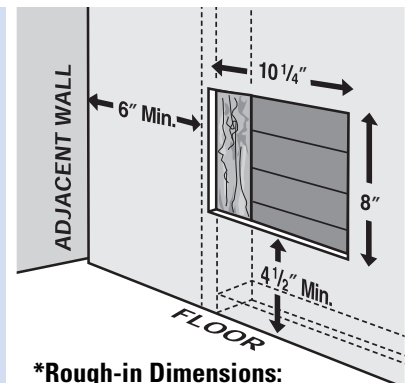

***Rough-in Dimensions:**
 10 1/4"W x 8"H x 4"D