

The Hot One®

Great for garages and shops

PHONE 360.693.2505

FAX 360.694.8668

WEB www.cadetco.com



CADET
SAFETY & QUALITY



General Information:

The Hot One® 240 volt portable heater is designed with the same rugged construction as Cadet's commercial unit heater line. It provides warmth for large areas that are often difficult to heat, like garages and workshops. The fan delay mechanism, standard on all units, allows the element to heat before blowing air, thereby eliminating cold startups. It also delays the shutdown of the fan after the element turns off to disperse residual heat. The Hot One® comes factory equipped with a bracket for either wall mount or floor stand use (non-marking rubber pads are included on the mounting bracket). The area must be equipped with an accessible 240 volt receptacle.

Architectural Information:

Portable fan unit heater shall be UL listed and rated at 240V. External cabinet shall be constructed of 20 gauge high quality steel and shall be finished with a baked on powder coat paint. Fan shall be aluminum blade axial flow type, and mounted directly to the motor shaft. Motor shall be shaded pole with ball bearings. Heating elements shall be sealed in magnesium oxide powder and protected by metal sheathing and aluminum fins. Heater shall be equipped with manual reset thermal cut out for over temperature protection. Fan motor circuits shall be thermostatically controlled with fan delay.

Technical Information:

The Hot One® 240 volt heater is available in 5,000 watts (3,333 low setting). It also includes a fan switch for air circulation without heat. All units include a built-in double pole thermostat. UL requires a 3' minimum clearance from front. For optimum performance Cadet recommends 6" from back and top, and 12" from sides.



SAFETY

Thermal Safeguard

- High temperature manual reset: turns off heater if normal operating temperatures are exceeded



QUALITY

High mass, tubular element for long life



COMFORT

- Fan delay eliminates cold draft on startup and disperses residual heat on shutdown
- Hi/Low switch for heat output (5000 watts / 3333 watts)
- Fan only control for air circulation



CONVENIENCE

- Built-in double pole thermostat
- Portable, great for garages and workshops
- 6 foot cord (with polarized plug) for 240V use



EASY

Bracket for wall mount or floor stand use

Ordering Information:

Standard color for The Hot One® heater is red with black detail. Recommended for elevations under 7500 feet.



Learn more about
The Hot One®
Scan It Now!



UPC Code

WATTS HI/LOW

AMPS HI/LOW

Part#	Model#	Description	240V	208V	120V	240V	208V	120V	Wt./Lbs
027418	10289 8	RCP502S	Portable Unit Heater	5000 / 3333		20.8 / 13.9			31

Carton Details


Complete Unit Carton

DIMENSIONS | 20.75"W x 18.75"H x 10.25"D

PALLET QTY. | 20


CUBE | 2.3

Receptacle/Plug Configuration




30 AMP
RCP502S

Product Dimensions: 15 1/2"W x 17 1/2"H x 8 1/4"D



Clearance Requirements

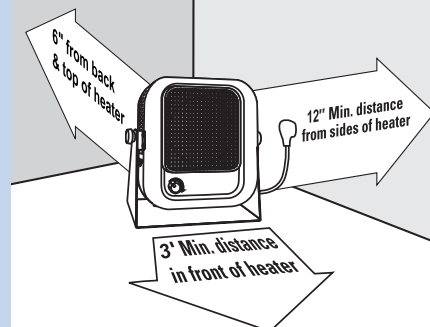

The Hot One®