

ASSEMBLY INSTRUCTIONS

ITEM NUMBER #89330 | Troon Chandelier

ITEM DESCRIPTION

MATERIAL TYPE: STEEL, GLASS, K9 CRYSTAL FINISH : ANTIQUE BRASS, WHITE SWIRL , CLEAR
 SOCKET TYPE: E12 CERAMIC SOCKET QTY: 12 TOP COAT/SEALANT:
 BULB TYPE: TYPE B BULB WATTAGE: 40W or/CFL 10W or/LED 9W
 ITEM NET WEIGHT: VOLTAGE: 110V-120V

UL COMPLAINT
 INSTALLATION ENVIRONMENT: SUITABLE FOR DAMP LOCATIONS




NOTE:
 *YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
 *THIS ITEM MAY REQUIRE PERIODIC TIGHTENING


PARTS

A	MOUNTING PLATE	1 PC
B	CANOPY	1 PC
C	RODS	6 PCS
D	BODY	1 PC
E	GLASS SPHERE	12 PCS LGE 3PCS; MED 6PCS; SML: 3PCS
F	CRYSTAL BALL	13 PCS
G	SOCKET ASSEMBLY	12 PCS
H	SCREW RING	12 PCS
I	SCREW CAP	2 PCS
J	SCREW NUT	2 PCS
K	METAL WASHER	2 PCS

INCLUDED ASSEMBLY HARDWARE

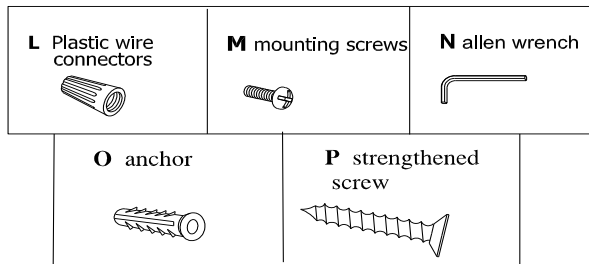

PRODUCT ASSEMBLY

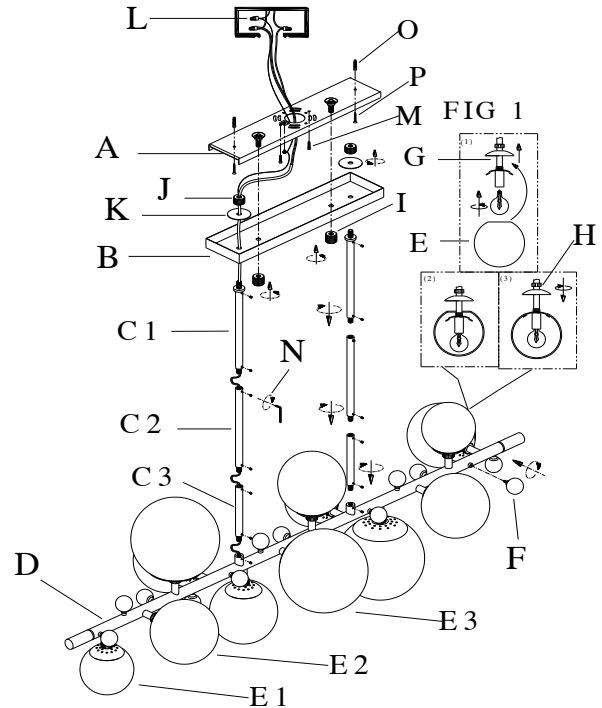

ASSEMBLY INSTRUCTIONS

1. REMOVE ALL PACKING CONTENTS FROM THE CARTON(S) CAREFULLY
2. REMOVE ALL PARTS FROM THE PACKAGE(S) CAREFULLY
3. PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY
4. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER
5. REMOVE THE MOUNTING PLATE (A) FROM THE CANOPY (B) BY LOOSE 2PCS SCREW CAP (I)
6. SCREW THE ROD (C3) TO THE MAIN BODY (D), AND TIGHTEN THE HEXANGULAR SCREW IN THE SIDE DESIRE HOLE BY ALLEN WRENCH (N) AND SCREW THE ROD (C1) AND (C2). REPEAT THE SAME OPERATION ON THE RODS ON ANOTHER SIDE.
7. AS FIG 1, UNSCREW THE SCREW RING (H) OFF THE SOCKET ASSEMBLY (G), INSERT TYPE G 25W BULB (OR SUITABLE CFL 7W/LED 5W, NOT INCLUDED) IN THE SOCKET, THEN ATTACH THE GLASS SPHERE (E) TO THE SOCKET PROPERLY, THEN SCREW THE SCREW RING (H) TO SECURE THE GLASS SPHERE TILL TIGHT. REPEAT THE ABOVE OPERATION ON THE REMAINING 2PCS SML GLASS SPHERE (E1), 6PCS MED GLASS SPHERE (E2) AND 3PCS LGE GLASS SPHERE (E3)
PLS NOTE INSTALL THE GLASS SPHERE SIZE LGE, MED AND SML BASED ON THE STICKERS ON THE LABEL ON THE SOCKET ASSEMBLY (G)
8. SCREW CRYSTAL BALL (F) ON THE MAIN BODY (E) TILL TIGHT. REPEAT THE SAME OPERATION ON THE REMAINING 12PCS CRYSTAL BALL.
9. INSERT THE ROD (C1) TO THE CANOPY (B) AND TIGHTEN IT BY USING METAL WASHER (K) AND SCREW NUT (J). PASS THROUGH THE CORD AS DRAWING SHOW. REPEAT THE SAME OPERATION ON ANOTHER SIDE.
10. CAREFULLY INSPECT THE PENDANT'S FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDGES MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING. THE BARE SILVER WIRE IS THE GROUND WIRE.
11. ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN) OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (L) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDING.
12. CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (L) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
13. CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (L) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
14. GENTLY TRUCK THE WIRE CONNECTIONS NEATLY INTO THE CEILING JUNCTION BOX.
15. ATTACH THE MOUNTING PLATE (A) WITH NIPPLE TO THE CEILING OUTLET BOX USING THE ENCLOSED MOUNTING SCREWS (M) AND TIGHTEN SCREWS WITH A SCREWDRIVER.
16. IF ATTACH TO CEMENT CEILING, USE ANCHOR (O) FIRST THEN SCREW STRENGTHENED SCREWS (P) INTO THE ANCHOR
17. IF ATTACH TO WOOD CEILING, THREAD STRENGTHENED SCREW (P) DIRECTLY INTO CEILING
18. PUSH MOUNTING PLATE (A) IN CANOPY (B) AND THREAD 2PCS SCREW CAP (I) TILL TIGHT. BE SURE ALL THE HEXANGULAR SCREWS WERE TIGHT ENOUGH.

CARE & MAINTENANCE

FOR CUSTOMER SERVICE QUESTION CALL 1-800-338-2150
 ARTERIORS HOME: 972.488.9800
 ARTERIORS CONTRACT: 972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

ARTERIORS