

ASSEMBLY INSTRUCTIONS

ITEM #49246| Simba Sconce

ITEM DESCRIPTION

MATERIAL TYPE: STEEL FINISH : ANTIQUE BRASS TOP COAT/SEALANT:
 SOCKET TYPE: LED SOCKET QTY:1
 BULB TYPE: LED BULB WATTAGE: 10W VOLTAGE:100V-130V
 ITEM NET WEIGHT:
 UL COMPLIANT
 INSTALLATION ENVIRONMENT: SUITABLE FOR DAMP LOCATIONS




NOTE:
 *YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON


PARTS

| | | |
|----------|----------------|------|
| A | MOUNTING PLATE | 1 PC |
| B | SET SCREWS | 4 PC |
| E | LAMP BODY | 1 PC |
| K | TERMINAL BLOCK | 1 PC |

INCLUDED ASSEMBLY HARDWARE

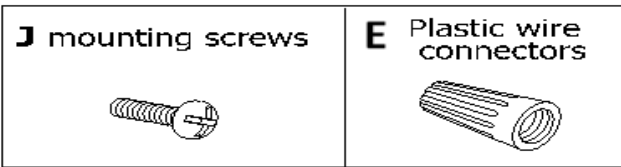

PRODUCT ASSEMBLY

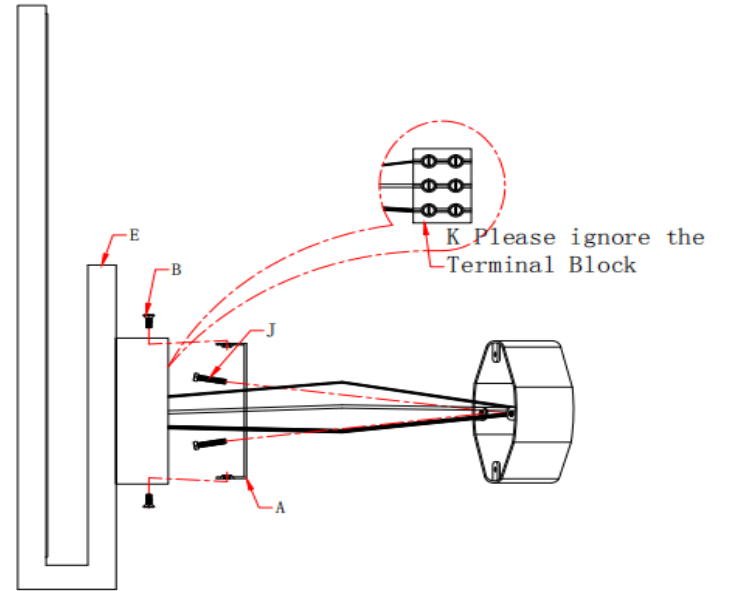

ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S)CAREFULLY.
- 2.PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEING ASSEMBLY.
- 3.SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
- 4.SEPARATE THE MOUNTING PLATE(A) FROM THE LAMP BODY(E) BY REMOVING THE 2 SET SCREWS(B)
- 5.PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK(K). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- 6.CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDEGS MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING.THE BARE SILVER WIRE IS THE GROUNDING WIRE.
7. ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (E) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW.IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- 8.CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETH WITH A WIRE CONNECTOR (E) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- 9.CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (E) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 10.**CONNECT THE RED WIRE(L) AND THE BLACK WIRE(N) TO THE DIMMER SWITCH AS SHOWN IN Fig 1. AND PLEASE TAKE NOTE THAT USE 0-10V DIMMER SWITCH.BE SURE NO STRANDS ARE EXPOSED.**
11. GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE CEILING JUNCTION BOX.
- 12.ATTACH THE MOUNTING PLATE(A) ONTO THE WALL J-BOX USING THE ENCLOSED MOUNTING SCREWS(J) AND TIGHTEN SCREWS WITH A SCREWDRIVER.
- 13.POSITION THE BACK PLATE OVER THE MOUNTING PLATE(A) ,SECURE THE BACK PLATE BY TIGHTENING 4 SET SCREWS (B)
- 14.RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

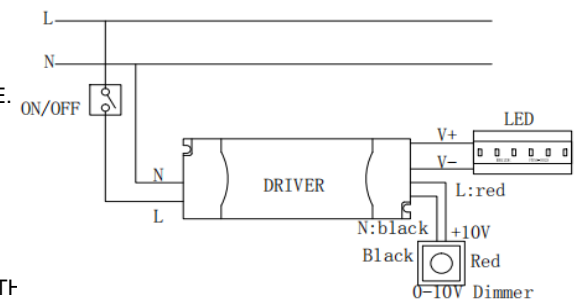


Fig. 1

CARE & MAINTENANCE

DUST WITH A DRY CLOTH.DO NOT USE ANY CHEMICAL OR ABRASIVE CLEANERS
 FOR CUSTOMER SERVICE QUESTIONS CALL 1.800.338.2150
 ARTERIORS HOME:972.488.9800
 ARTERIORS CONTRACT:972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

ARTERIORS