


ASSEMBLY INSTRUCTIONS

ITEM # 89478 /CHANDELIER

ITEM DESCRIPTION

MATERIAL TYPE:METAL+ALABASTER FINISH :EBN TOP COAT/SEALANT
 SOCKET TYPE:LED SOCKET QTY: 8PCS
 BULB TYPE: BULB WATTAGE: LED 45W VOLTAGE:100V-120V
 ITEM NET WEIGHT:
 UL COMPLIANT
 INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS





NOTE:
 *YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
 *THIS ITEM MAY REQUIRE PERIODIC TIGHTENING
 *MIN 75°C SUPPLY CONDUCTORS


PARTS

A	MOUNTING PLATE	1PC
B	NUTS	3 PCS
D	CANOPY	1 PC
F	SET SCREWS	4 PCS
G1G2G3G4	RODS	2 PCS
H	LAMP BODY	1 PC
I	HEX SCREWS	24 PCS
L	MODULE	4 PCS
N	ALABASTER	4 PCS
O	POWER CABLE	1 PC
P	2-WIRE TERMINAL	1 PC
Q	METAL SHEET	1PC


PRODUCT ASSEMBLY

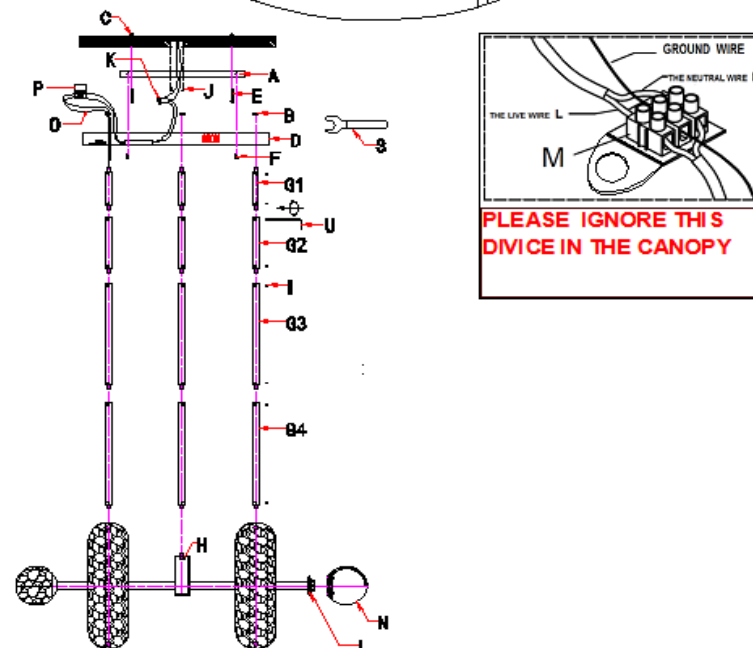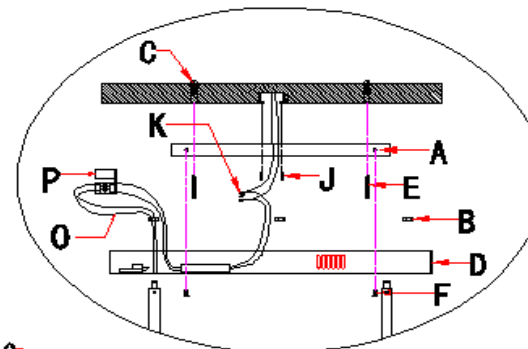




INCLUDED ASSEMBLY HARDWARE

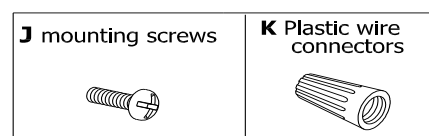

TOOLS NEEDED(INCLUDED)

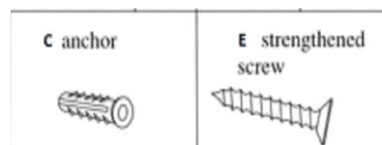

TOOLS NEEDED(INCLUDED)



ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S)CAREFULLY.
- 2.PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY.
- 3.SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
- 4.POSITION FIXTURE IN DESIRED LOCATION ON CEILING. THE MOUNTING PLATE FEATURES (2) HOLES FOR SCREW MOUNTING.
 MARK THESE SPOTS ON THE CEILING WITH A PENCIL TO DRILL HOLES. DRILL 2 HOLES ON THESE SPOTS AND INSERT ANCHORS(C) INTO DRILLED HOLES.
- 5.INSERT THE ROD(G4) TO LAMP BODY(H) AND THEN TIGHTEN CLOCKWISE DIRECTION,REPEAT THE SAME OPERATION ON THE ROD(G1). ROD(G2) AND ROD(G3)
 WHEN YOU CONNECT THE RODS,LOOSEN THE SMALL HEX SCREWS(I) IN THE SIDE HOLE FIRST, THEN
 TIGHTEN WITH ALLEN WRENCH(U) AFTER ALL RODS ARE CONNECTED. **BE SURE ALL THE HEXANGULAR SCREWS ARE TIGHT ENOUGH.**
- 6.PULL THE ELECTRICAL CORD OF "J BOX"THROUGH THE EXIT HOLE OF THE MOUNTING PLATE(A)
- 7.**PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE WIRE CONNECT DEVICE(M).**
IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- 8.CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDEGS MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING.THE BARE SILVER WIRE IS THE GROUNDED WIRE.
- 9.ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE).
 FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
- 10.CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- 11.CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 12.GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE JUNCTION BOX.
13. ATTACH THE MOUNTING PLATE (A) TO THE CEILING OUTLET BOX USING THE ENCLOSED MOUNTING SCREWS (J) AND TIGHTEN MOUNTING SCREWS(J) WITH A SCREWDRIVER.THEN SECURE MOUNTING PLATE (A) ON THE CEILING BY INSERTING 2PCS STRENGTHENED SCREWS(E) INTO THE ANCHOR(C) AND THEN TIGHTEN STRENGTHENED SCREWS (E) WITH A SCREWDRIVER.
14. PUT THE METAL SHEET (Q) AND CANOPY(D) INTO THE ROD (G1) IN TURN, AND TIGHTEN THE HEX SCREW (I) WITH A WRENCH (S).
 REPEAT THE SAME OPERATIONS(7) ON ANOTHER SIDE.
15. ATTACH THE CANOPY (D) ONTO THE MOUNTING PLATE (A) WITH 2PCS SET SCREWS (F), AND TIGHTEN IT WITH A SCREWDRIVER.
- 16.ATTACH THE ALABASDER (N), ON THE MODULE(L) BY TURNING IN A CLOCKWISE DIRECTION.
- 17.RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.
- 18.FOR NON-USER REPLACEABLE LIGHT SOURCES: THE LIGHT SOURCE CONTAINED IN THIS LUMINAIRE SHALL ONLY BE REPLACE BY THE MANUFACTURER OR HIS SERVICE AGENT OR A SIMILAR QUALIFIEDPERSON .

CARE & MAINTENANCE

DUST WITH A DRY CLOTH.

FOR CUSTOMER SERVICE QUESTIONS CALL 1.888.488.8866
 ARTERIORS HOME:972.488.9800
 ARTERIORS CONTRACT:972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

ARTERIORS