

CAL-ROYAL

P R O D U C T S, I N C.

SL/CSL SERIES
ANSI GRADE 2
CYLINDRICAL
LEVERSET

• Available With Interchangeable Core

Meets ADA requirements.
Specially designed for
Barrier Free Application
Conforms with ANSI A156.2
Series 4000, Grade-2.
Exceeds 400,000 cycles.

UL LISTED

PIONEER

SL SERIES (NON CLUTCH MECHANISM)


CSL SERIES (CLUTCH MECHANISM)

LX SERIES (NON CLUTCH, FIXED THRUBOLT)


CSL SERIES

PATENTED CLUTCH DESIGN



Free turning handle in the locked position, without retracting the latch, to deter breaking of the handle

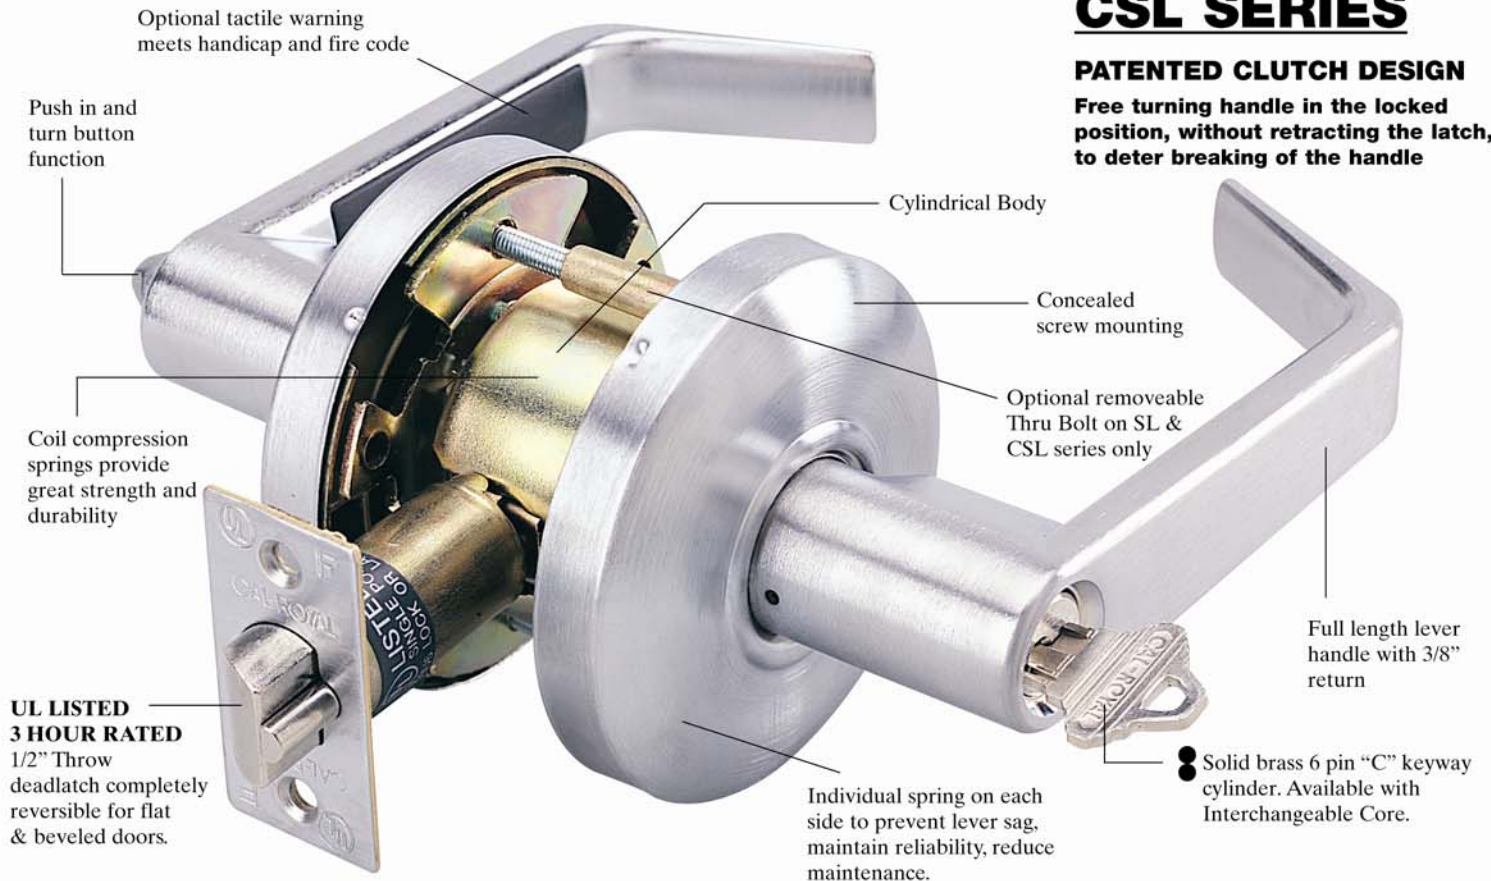

AG DESIGN



RL DESIGN

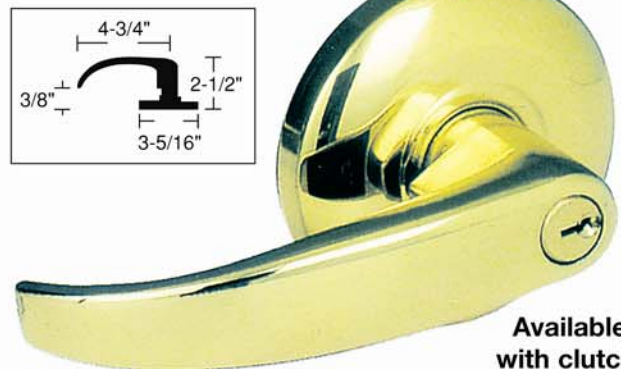

FINISHES AVAILABLE

BHMA SYMBOL	US CODE	DESCRIPTION
605	3	Polished Brass
612	10	Satin Bronze
613	10B	Oil Rubbed Bronze
625	26	Bright Chrome
626	26D	Satin Chrome
606	4	Satin Brass

Other finishes available with lead time.

SPECIFICATIONS

Applications

For offices, schools, hospitals, apartments, hotel/motel and other public buildings.

Door Ranges

1-3/8" to 1-3/4" thickness doors.

Backset

2-3/4" Standard, 2-3/8", 3-3/4" and 5" optional.

Front

2-1/4" X 1-1/8", adjustable for flat or beveled doors 1/8" in 2".

Strike

ASA strike standard, "T" and full lip strike available on request.

Latchbolt

1/2" Throw solid brass, reversible for RH or LH applications. UL listed.

Latch & Strike Screws

8-32 X 1" FPH dual purpose.


ANSI Standards

Meets or exceeds requirements of BHMA/ANSI A156.2 Series 4000 grade 2(FF-H 106C), 400,000 cycles.

DIMENSIONS

The lever features a 3/8" return and projection of 2-1/2" from the face of door.

SL/CSL Design

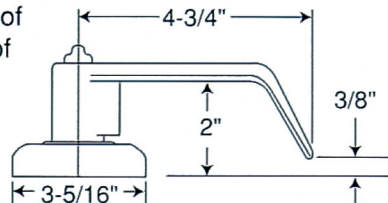

Exposed Trim

Wrought brass, bronze or stainless steel, levers are Zinc casting, plated to match trim finish.

Keying

6-pin "C" keyway cylinder, 2 keys per lock. Keying as per individual job requirement.

Cylinders & Keyways

6 pin solid brass "C" key way standard. Schlage C-K, Russwin D1, L4, Corbin 60, Sargent LA, Falcon/Weiser E, Arrow, Yale 8, Yale GA, Kwikset (Optional). Can also accept Medeco, Assa, and Kaba High Security Cylinders.

Clutch

Clutch available on all keyed locks and privacy functions. Prefix "C" before part number.

Tactile & Lead Lining


Available upon request.

Interchangeable Core

Interchangeable core locks will accept compatible 6 or 7 pin cores with BEST, FALCON and ARROW. Prefix "IC" before part number. Available combined or uncombined. Temporary construction cores available. Factory keying with control key and masterkey available.

INDICATES FUNCTION AVAILABLE WITH INTERCHANGEABLE CORE

SL-00




ENTRANCE/OFFICE LOCK

Turn/Push button locking. Pushing and turning button locks outside knob requiring use of key until button is manually unlocked. Pushing button locks outside knob until unlocked with key or inside knob is turned.

Prefix "C" for clutch system

SL-03




CLASSROOM LOCK

Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latch bolt is operated by turning inside lever.

Prefix "C" for clutch system

SL-05




STOREROOM LOCK

Outside lever fixed. Entrance by key only. Inside lever always unlocked.

Prefix "C" for clutch system

SL-20




PRIVACY LOCK

Latch bolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside. Turning inside lever or closing door release push button.

Prefix "C" for clutch system

SL-30



PASSAGE SET

Latch bolt operated by lever from either side at all times.


SL-40



DUMMY LEVER


Single dummy trim for one side of door. Pull only.

SL-50



EXIT LOCK

Blank plate outside. Inside lever always unlocked.

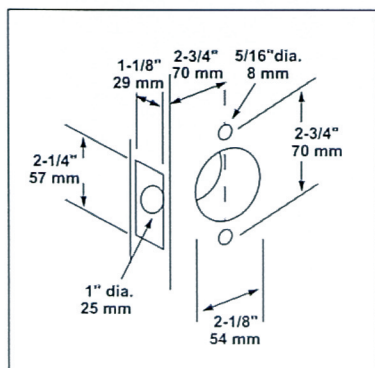

Door Preparation
When Optional Thru-
Bolt Is Applied

CAL-ROYAL

PRODUCTS, INC.

6605 FLOTILLA ST., COMMERCE, CA 90040 U.S.A.

TEL: (323) 888-6601 FAX: (323) 888-6699

Website: cal-royal.com • Email: sales@cal-royal.com