

ASSEMBLY INSTRUCTIONS

ITEM # 89651 /CHANDELIER

ITEM DESCRIPTION

MATERIAL TYPE:METAL+SNOW MARBLE FINISH :ANTIQU BRASS/SNOW MARBLE TOP COAT/SEALANT
 SOCKET TYPE:LED SOCKET QTY:
 BULB TYPE: BULB WATTAGE: LED 50W VOLTAGE:100V-120V
 ITEM NET WEIGHT:
 UL COMPLIANT
 INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS




NOTE:

*YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
 *THIS ITEM MAY REQUIRE PERIODIC TIGHTENING
 *MIN 75°C SUPPLY CONDUCTORS


PARTS

| | | |
|----------|-----------------|--------|
| A | MOUNTING PLATE | 1PC |
| B | HEX NUT | 2 PCS |
| D | CANOPY | 1 PC |
| F | COLLAR LOOP | 2 PCS |
| G1.2.3.4 | RODS | 2 PCS |
| H | LAMP BODY | 1 PC |
| I | HEX SCREW | 16 PCS |
| O | POWER CABLE | 1 PC |
| P | 2-WIRE TERMINAL | 1 PC |
| T | SCREW | 2 PCS |
| Q | BRACKET | 1 PCS |
| X | SCREW | 2 PCS |
| Y | COUPLING | 1 PCS |
| Z | AIRCRAFT WIRE | 1 PCS |


INCLUDED ASSEMBLY HARDWARE

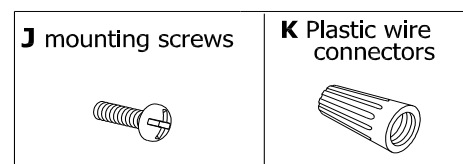

TOOLS NEEDED(INCLUDED)

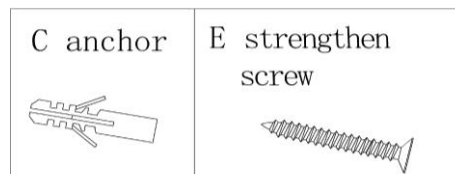


TOOLS NEEDED(INCLUDED)

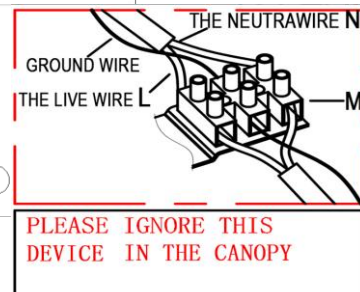

ASSEMBLY INSTRUCTIONS

- REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S) CAREFULLY.
- PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY.
- SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
- POSITION FIXTURE IN DESIRED LOCATION ON CEILING. THE MOUNTING PLATE FEATURES (2) HOLES FOR SCREW MOUNTING. MARK THESE SPOTS ON THE CEILING WITH A PENCIL TO DRILL HOLES. DRILL 2 HOLES ON THESE SPOTS AND INSERT ANCHORS(C) INTO DRILLED HOLES.
- SCREW THE ROD(G4) TO LAMP BODY(H) TILL TIGHT, REPEAT THE SAME OPERATION ON THE ROD(G3), ROD(G2) AND ROD(G1). WHEN YOU CONNECT THE RODS, LOOSEN THE SMALL HEX SCREWS(I) IN THE SIDE HOLE FIRST THEN TIGHTEN WITH ALLEN WRENCH(U) AFTER ALL RODS ARE CONNECTED. **BE SURE ALL THE HEXANGULAR SCREWS ARE TIGHT ENOUGH.**
- CONNECT ROD(G1), COLLAR LOOP(F), CANOPY(D) & MOUNTING PLATE(A) WITH NIPPLE ON MOUNTING PLATE(A), AND TIGHTEN THE HEX NUTS (B) WITH A WRENCH (S). REPEAT THE SAME OPERATIONS ON ANOTHER SIDE.
- PULL THE ELECTRICAL CORD OF "J BOX" THROUGH THE EXIT HOLE OF THE MOUNTING PLATE.
- DRILL ONE HOLE ON THE CEILING AND INSERT ANCHOR(C) INTO DRILLED HOLE, THEN FIX BRACKET(Q) TO THE CEILING WITH STRENGTHENED SCREW (E) BY SCREWING INTO ANCHOR(C). REMOVE THE COUPLING(Y) FROM THE AIRCRAFT WIRE(Z) BY LOOSENING (2) SCREWS(X). PASS THE AIRCRAFT WIRE(Z) THROUGH (2) HOLES ON THE BRACKET(Q). THEN PASS THE AIRCRAFT WIRE(Z) THROUGH (2) HOLES ON THE COUPLING(Y) AND FIX WITH (2) SCREWS(X) AS FIG 1. OR YOU CAN FIND MORE DETAILS ON NEXT PAGE. **BE SURE TO TIGHTEN TWO SCREWS ATTACHED ON THE COUPLING(Y).**
- PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE WIRE CONNECT DEVICE(M). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.**
- CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDGES MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING. THE BARE SILVER WIRE IS THE GROUND WIRE.
- ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
- CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- CONNECT THE LAMP INPUT POWER CABLE(O) USUALLY BLACK AND WHITE WIRE, ACCORDING TO THE PRINCIPLE OF CONNECTING THE BLACK WIRE TO THE + POLE AND THE WHITE WIRE TO THE - POLE TO THE 2-WIRE TERMINAL (P), AND THEN COVER THE 2-WIRE TERMINAL (P) CAP.
- GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE JUNCTION BOX.
- ATTACH THE MOUNTING PLATE (A) WITH NIPPLE TO THE CEILING OUTLET BOX USING THE ENCLOSED MOUNTING SCREWS (J) AND TIGHTEN SCREWS WITH A SCREWDRIVER. ATTACH THE STRENGTHENED SCREW (E) WITH NIPPLE TO THE ANCHOR (C) AND TIGHTEN SCREWS WITH A SCREWDRIVER.
- ATTACH CANOPY(D) TO THE MOUNTING PLATE(A) BY USING THE COLLAR LOOP(F). TIGHTEN SCREWS (Z) WITH SCREWDRIVER. REPEAT THE SAME OPERATIONS ON ANOTHER SIDE.
- ROTATE (R)(T)(W)(V) CLOCKWISE OR COUNTERCLOCKWISE TO ADJUST THE POSITION.
- RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

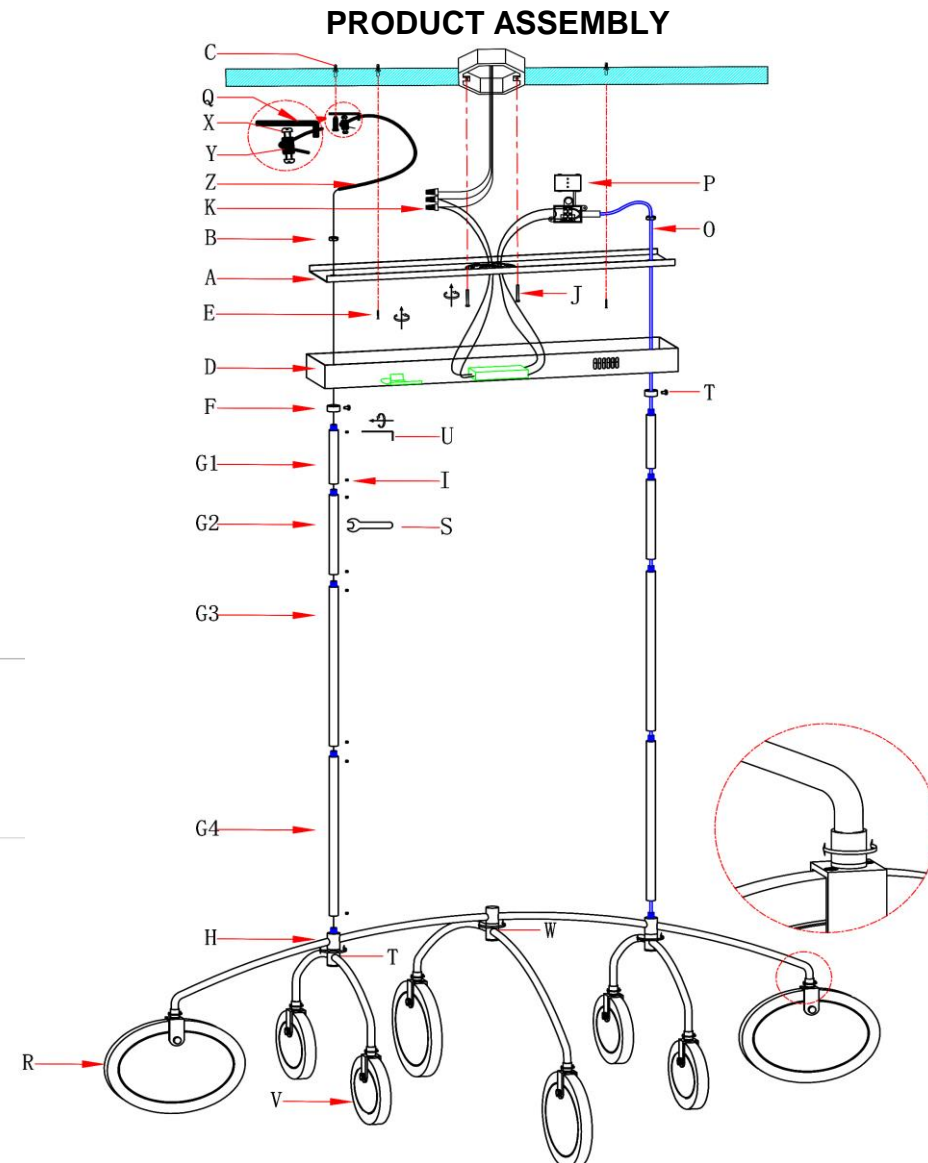

CARE & MAINTENANCE

DUST WITH A DRY CLOTH.
 FOR CUSTOMER SERVICE QUESTIONS CALL 1.888.488.8866
 ARTERIORS HOME: 972.488.9800
 ARTERIORS CONTRACT: 972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.