

ASSEMBLY INSTRUCTIONS

ITEM #89660 /CHANDELIER

ITEM DESCRIPTION

MATERIAL TYPE:METAL+GLASS FINISH :ANTIQUE BRASS TOP COAT/SEALANT
 SOCKET TYPE:LED SOCKET QTY:
 BULB TYPE: BULB WATTAGE: **LED 60W** VOLTAGE:100V-120V
 ITEM NET WEIGHT:
 UL COMPLIANT
 INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS




PRODUCT ASSEMBLY

NOTE:
 *YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
 *THIS ITEM MAY REQUIRE PERIODIC TIGHTENING
 *MIN 75°C SUPPLY CONDUCTORS


PARTS

A	MOUNTING PLATE	1PC
B	CANOPY	1PC
C	COLLAR LOOP	1 PC
D	TOP THUMB-SCREW	60 PCS
E	HEX SCREW	2 PCS
F1.2.3	POSTS	1PC
G1.2.3.4	RODS	4 PC
H	U-GLASS	60 PCS
I	BOTTOM THUMB-SCREW	60 PCS
N	SCREW	3 PC
O	POWER CABLE	1 PC
P	2-WIRE TERMINAL	1 PC
Q	LAMP BODY	1 PC
F	JUNCTION BOX	1 PC
R	BOLSTER	60 PC


INCLUDED ASSEMBLY HARDWARE

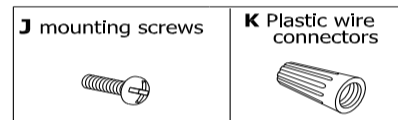

TOOLS NEEDED(INCLUDED)

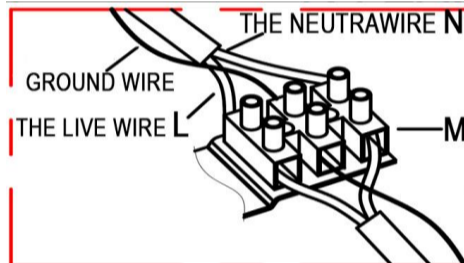

TOOLS NEEDED(INCLUDED)



PLEASE IGNORE THIS DEVICE IN THE CANOPY

ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S)CAREFULLY.
- 2.PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY.
3. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
- 4.THE POSTS (F1、 F2、 F3) INTO THE LIGHT TUBE(Q) . ATTACH THE SCREW (N) WITH NIPPLE TO THE LIGHT TUBE (Q) AND TIGHTEN SCREWS WITH A SCREWDRIVER.
- 5.SCREW THE ROD(G4) TO JUNCTION BOX (F) TILL TIGHT,REPEAT THE SAME OPERATION ON THE ROD(G3)、 ROD(G2) AND ROD(G1)
 WHEN YOU CONNECT THE RODS,LOOSEN THE **SMALL HEX SCREWS (E)** IN THE SIDE HOLE FIRST THEN TIGHTEN WITH ALLEN WRENCH(U) AFTER ALL RODS ARE CONNECTED. **BE SURE ALL THE HEXANGULAR SCREWS ARE TIGHT ENOUGH.**
- 6.CONNECT ROD(G1),COLLAR LOOP(C), CANOPY(B) & MOUNTING PLATE(A) WITH NIPPLE ON MOUNTING PLATE(A).
- 7.PULL THE ELECTRICAL CORD OF "J BOX"THROUGH THE EXIT HOLE OF THE MOUNTING PLATE.
- 8.**PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE WIRE CONNECT DEVICE(M).** IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- 9.CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDEGS MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING.THE BARE SILVER WIRE IS THE GROUNDED WIRE.
- 10.ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
- 11.CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- 12.CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
13. CONNECT THE LAMP INPUT POWER CABLE(O) USUALLY BLACK AND WHITE WIRE, ACCORDING TO THE PRINCIPLE OF CONNECTING THE BLACK WIRE TO THE + POLE AND THE WHITE WIRE TO THE-POLE TO THE 2-WIRE TERMINAL (P), AND THEN COVER THE 2-WIRE TERMINAL (P) CAP.
- 14.GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE JUNCTION BOX.
15. ATTACH THE MOUNTING PLATE (A) WITH NIPPLE TO THE CEILING OUTLET BOX USING THE ENCLOSED MOUNTING SCREWS (J)
- 16.PUSH COLLAR LOOP(C) IN CANOPY (B) AND TIGHTEN ONTO NIPPLE IN MOUNTING PLATE (A) BY TURNING IN A CLOCKWISE.
17. ATTACHED THE U-GLASS (H) ON THE LAMP BODY(Q), THEN ATTACHED THE BOLSTER (R) TO THE U-GLASS (H) HOLE, AND SECURE IT WITH TOP THUMB-SCREW(D) AND BOTTOM THUMB-SCREW (I)
- 18.RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

CARE & MAINTENANCE

DUST WITH A DRY CLOTH.

FOR CUSTOMER SERVICE QUESTIONS CALL 1.888.488.8866
 ARTERIORS HOME:972.488.9800
 ARTERIORS CONTRACT:972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN