

# ASSEMBLY INSTRUCTIONS

ITEM #DMC02| BUBBLY CLUSTER CHANDELIER

## ITEM DESCRIPTION

MATERIAL TYPE: STEEL, GLASS  
 SOCKET TYPE: E26 CERAMIC  
 BULB TYPE: TYPE T  
 ITEM NET WEIGHT: 17.50KGS

FINISH: ENGLISH BRONZE, **BUBBLY CHAMPAGNE** TOP COAT/SEALANT:  
 SOCKET QTY: 9PC  
 BULB WATTAGE: **40W or/CFL 9W or/LED 4W** VOLTAGE: 110V-120V

UL COMPLIANT  
 INSTALLATION ENVIRONMENT: SUITABLE FOR DAMP LOCATIONS





### NOTE:

- \*YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
- \*THIS ITEM MAY REQUIRE PERIODIC TIGHTENING

## PARTS

<b>A</b>	<b>MOUNTING PLATE</b>	<b>1 PC</b>
<b>B</b>	<b>CANOPY</b>	<b>1 PC</b>
<b>C</b>	<b>COLLAR LOOP RING</b>	<b>1 PC</b>
<b>D</b>	<b>LAMP BODY</b>	<b>1 PC</b>
<b>E</b>	<b>BRACKET</b>	<b>9 PCS</b>
<b>F</b>	<b>SOCKET</b>	<b>9 PCS</b>
<b>G</b>	<b>BULB(not included)</b>	<b>9PCS</b>
<b>H</b>	<b>CHAIN</b>	<b>1 PC</b>
<b>I</b>	<b>QUICK LINK</b>	<b>2 PCS</b>
<b>M</b>	<b>COLLAR LOOP</b>	<b>1 PC</b>
<b>O</b>	<b>LARGE GLASS SHADE</b>	<b>4PCS</b>
<b>L</b>	<b>SMALL GLASS SHADE</b>	<b>5PCS</b>
<b>P</b>	<b>KNURLED METAL RING</b>	<b>9 PCS</b>
<b>N</b>	<b>METAL CAP</b>	<b>9PCS</b>

## PRODUCT ASSEMBLY

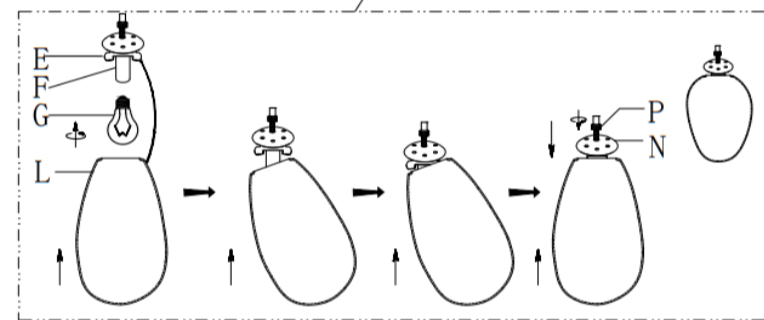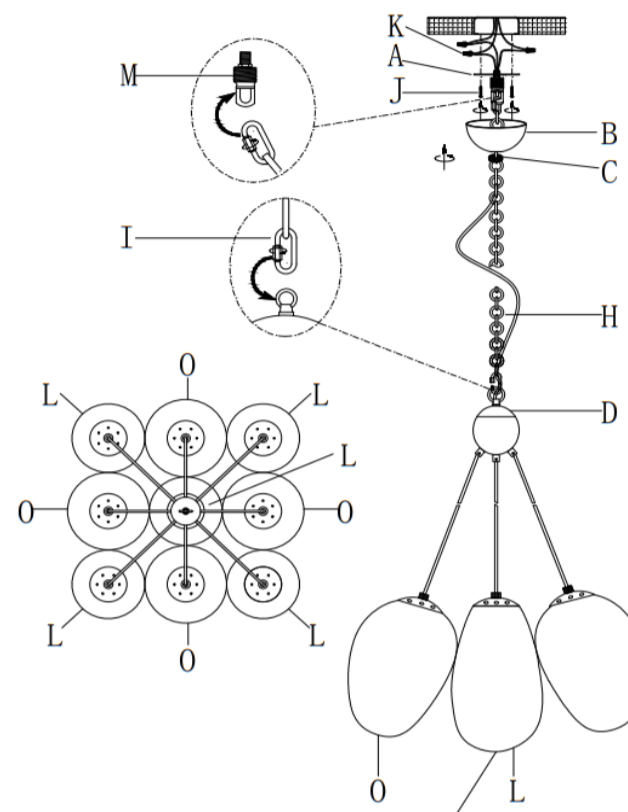

## INCLUDED ASSEMBLY HARDWARE

J MOUNTING SCREWS	K PLASTIC WIRE CONNECTORS
L ALLEN WRENCH	

## ASSEMBLY INSTRUCTIONS

1. REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S) CAREFULLY.
2. PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY.
3. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
4. CONNECT THE LAMP BODY(D) TO ONE SIDE OF THE CHAIN(H) BY USING ONE OF THE QUICK LINK(I) PROVIDED.
5. PULL THE ELECTRICAL CORD OF "J BOX" THROUGH THE EXIT HOLE OF THE MOUNTING PLATE(A).
6. CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDGES MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING. THE BARE WIRE IS THE GROUNDED WIRE.
7. ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
8. CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
9. CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE JUNCTION BOX.
11. ATTACH THE MOUNTING PLATE (A) WITH COLLAR LOOP(M) TO THE OUTLET BOX BY USING THE MOUNTING SCREWS(J) AND TIGHTEN SCREWS WITH A SCREWDRIVER.
12. PASS THE CHAIN(H) THROUGH THE COLLAR LOOP RING(C) AND CANOPY(B) IN TURN, THEN CONNECT THE CHAIN(H) TO THE COLLAR LOOP(M) BY ANOTHER QUICK LINK(I).
13. PUSH COLLAR LOOP RING(C) AND CANOPY (B) UP TO THE CEILING AND TIGHTEN ONTO THE NIPPLE IN MOUNTING PLATE (A) BY TURNING IN A CLOCKWISE DIRECTION.
14. INSERT 9 TYPE T 40W or /CFL 9W or LED 4W BULB(NOT INCLUDED) INTO THE SOCKET(F). **DO NOT EXCEED SPECIFIED WATTAGE**
15. LIFT THE METAL CAP(N) AND KNURLED METAL RING(P) AND PUT THE BRACKET(E) INSIDE THE GLASS SHADE(O) AT AN ANGLE. PUT DOWN THE METAL CAP(N) TO COVER THE TOP OF THE GLASS SHADE(O), THEN TIGHTEN THE KNURLED METAL RING (P) IN A CLOCKWISE DIRECTION TO SECURE THE GLASS SHADE.
16. REPEAT THE SAME OPERATION (15) ON THE REMAINING GLASS SHADES ( O & L )
17. RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

## CLEANING INSTRUCTIONS:

TO CLEAN, USE SOFT CLOTH ONLY. DO NOT USE ANY CHEMICAL OR ABRASIVE CLEANERS.

## CARE & MAINTENANCE

DUST WITH A DRY CLOTH.

FOR CUSTOMER SERVICE QUESTIONS CALL 1.888.488.8866

ARTERIOS HOME: 972.488.9800

ARTERIOS CONTRACT: 972.488.9800 EXT.321

## DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

# ARTERIOS