

## 540-LDL9ABCP

### Wall Mounted Faucet

#### PRODUCT TYPE

Wall mounted faucet

#### FEATURES & SPECIFICATIONS

- Polished chrome plated finish
- ECAST design provides durable brass construction with total lead content less than 0.25% by weighted average
- Adjustable 7 1/4" to 8 3/4" centers
- 9 1/2" C-C cast swing spout, catalog #L9
- 2.2 GPM (8.3 L/min) pressure compensating aerator outlet, catalog #E3
- 2 3/8" Lever handles with secured color coded index buttons, catalog #369
- Quatern™ quarter-turn renewable compression cartridge that closes with water pressure with tapered square broach to facilitate handle removal, catalog #1-100XTJKABNF and #1-099XTJKABNF
- 3/8" Offset adjustable supply arms with 1/2" NPT female inlets and wall flange, catalog #G

#### PERFORMANCE SPECIFICATION

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140° F

#### WARRANTY

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

#### COMPLIANT TO

- CA AB1953 (2006)
- ASME A112.18.1M
- ADA ANSI/ICC A117.1
- VT S.152
- CSA B125

Job Name	_____
Item Number	_____
Section/Tag	_____
Model Specified	_____
Architect	_____
Engineer	_____
Contractor	_____
<input type="checkbox"/> Submitted as Shown	<input type="checkbox"/> Submitted with Variations
Date	_____



# 540-LDL9ABCP

Wall Mounted Faucet


# ECAST<sup>®</sup>

# CHICAGO FAUCETS<sup>®</sup>

a Geberit company

## ARCHITECT/ENGINEER SPECIFICATION

Chicago Faucets No. 540-LDL9ABCP, Polished chrome plated solid cast brass construction. ECAST™ construction with less than 0.25% lead content by weighted average. 9 1/2" C-C swing spout with 2.2 GPM pressure compensating aerator outlet. 2 3/8" Metal lever handles with eight point tapered broach and secured color coded index buttons. Quatum™ quarter-turn renewable compression cartridge designed to close with water pressure with square tapered broach feature to help facilitate handle removal. 3/8" Offset supply arms with adjustable 7 1/4" to 8 3/4" centers. This product meets ADA requirements and is tested and certified to industry standards: ASME A112.18.1, CSA B125, CA AB1953 (2006) and VT S.152.

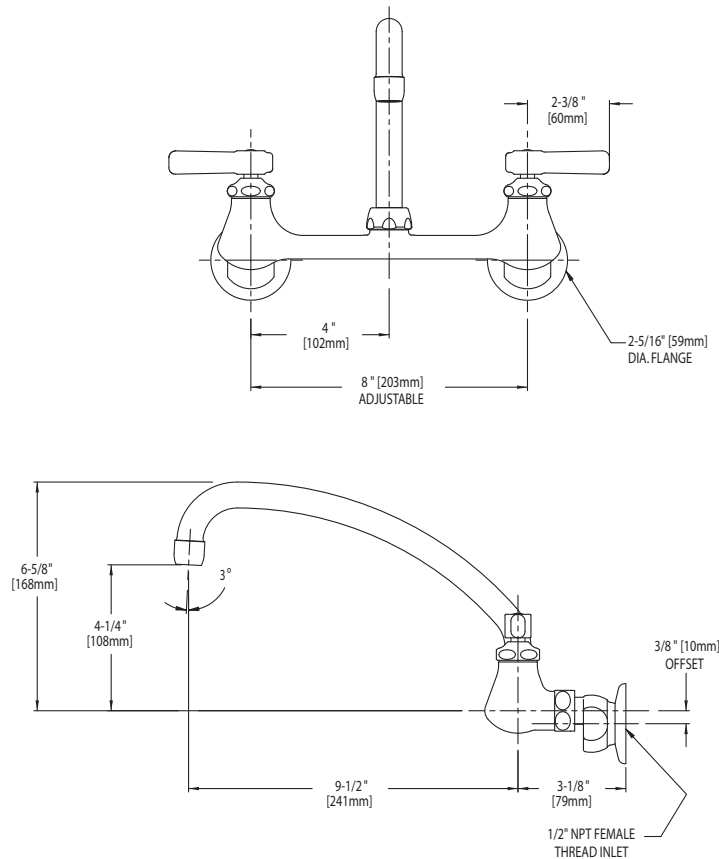

## OPERATION AND MAINTENANCE

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning this product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at [www.chicagofaucets.com](http://www.chicagofaucets.com).

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive  
Des Plaines, IL 60018  
P: 847/803-5000  
F: 847/803-5454  
Technical: 800/TEC-TRUE  
[www.chicagofaucets.com](http://www.chicagofaucets.com)