


# TECHNICAL SPECIFICATIONS

## M3

Concealed thermostatic shower kit

code | 231 500 xxx

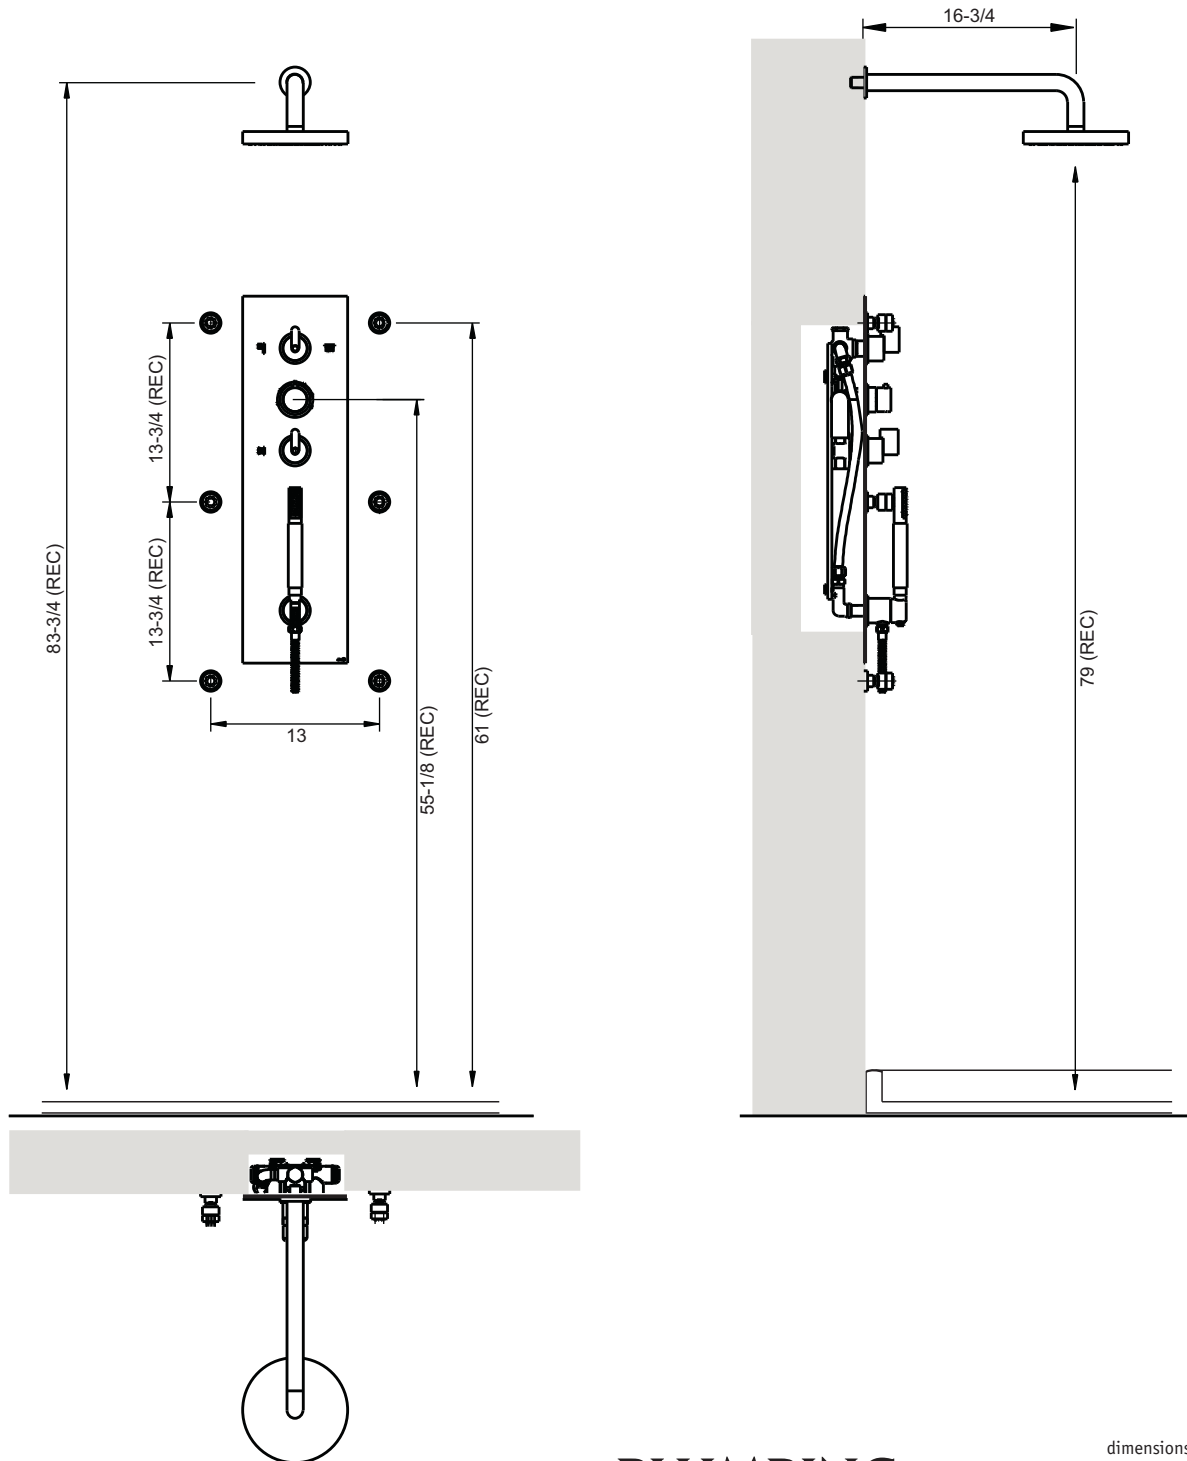

5663807  
983MS013W00

REC - Recommended

dimensions inches

## PLUMBING

**CIFIAL USA**  
USA P +1800 5284904 F +1800 5281969 info@cifialusa.com www.cifialusa.com  
**CIFIAL Torneiras, S.A.**  
Portugal T +351 256 780 700 F +351 256 780 710 cifial@cifial.pt www.cifial.pt  
**CIFIALDECOR, S.A.**  
Espanha T +34 916 110 261 F +34 916 103 694 cifialdecor@infonegocio.com  
**CIFIAL UK, Ltd.**  
UK P +44 1933 402 008 F +44 1933 402 063 sales@cifial.co.uk www.cifial.co.uk



## INSTALLATION

This thermostatic shower kit is separated into 3 distinct parts: thermostatic mixer with handset, fixed shower head and 6 units of body sprays.

Each one of these parts is provided with its own Installation Instructions.

This Instruction is a complement and supports the installation of all sets.

### Body spray

The connection between the diverter valve (outlet 1/2" NPT) and outlets (1/2" NPT) for body sprays must be installed using pressure loops. It must be assembled using pipe with a maximum interior diameter possible and never smaller than 1/2". The body sprays are applied individually on the wall outlets pre-installed in accordance with the distances recommended and indicated in drawing.

For the best performance the water pressure, with the system on, must be no less than 47 PSI (ideally 60 PSI).

