

FEATURES

- Precision optical design produces high efficiency in a high visual comfort architecturally styled direct/indirect distribution
- Custom perforated metal basket with high transmission lamp-obscuring overlay
- Optimized coating process and unique paint formulation provide exceptional reflectivity in a matte finish for a soft visual image and balanced basket and reflector illumination
- Completely recessed, provides a clean ceiling with uniform illumination at mounting heights as low as 8 feet
- Available for use with T8, T5 or T5HO linear fluorescent lamps
- Optional acrylic dust guard pivots to seal lamp compartment against contaminants especially for schools, medical facilities and public spaces
- Companion Louvered (STEL), side basket (STS) and pendant (STP) models available
- Available with exclusive wiHUBB technology preinstalled
 - Peer to peer, self-healing wireless mesh network
 - Integrated control system for 0-10VDC or step dimming, or On/Off

PROJECT INFORMATION

Project Name _____

Type _____

Catalog No. _____

Date _____

CONSTRUCTION

Luminaire housing and end caps are die formed code gauge cold rolled steel. The sturdy reflector is stiffened with linear forms, profiled to a precision curve. Perforated basket with high transmission overlay for improved optical efficiency plus lamp obscuration. Basket and all reflective surfaces are finished after fabrication with unique formula high reflectivity matte white paint for soft, uniform indirect illumination.

Thermoplastic light traps snap into the housing at both ends of the basket to prevent light leaks. Basket hinges down for easy access to center wireway.

INSTALLATION

An access plate is furnished with each luminaire for fast wiring access from the plenum. No need to open fixture. Fixtures with two ballasts or emergency-equipped fixtures may require using end wireway access.

BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, sound rated A, magnetic or electronic ballasts. CEE NEMA Premium compliant.

ELECTRICAL

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A. CEE NEMA Premium compliant. All ballast leads extend a minimum of 6" through access location. NEC/CEC-compliant ballast disconnect is standard.

CEILING COMPATIBILITY

NEC-compliant T-Bar clips supplied with all grid trim fixtures. See ceiling details on reverse. For type SG ceilings order G trim. Fixture will be regressed 3/8" from the face of the ceiling tee. For hard ceilings order G trim and FK flange accessory. Assemble then support FK accessory at the ceiling plane using tie wires (by others). Contact your Columbia representative for compatibility information for specific ceiling types or for continuous row applications in hard ceilings.

CERTIFICATION

All luminaires are built to UL 1598 standards and bear appropriate UL and cUL or CSA labels. Damp location labeling is standard. Emergency-equipped fixtures labeled UL 924.

ORDERING INFORMATION

EXAMPLE STE22-317G-MPO-EU

STE	22	3	MPO	U	GLR
MODEL	NO. OF LAMPS	CEILING TYPE	SHIELDING	VOLTAGE	OPTIONS
STE Stratus® E-Series Recessed Indirect	3 Three	G Grid Lay-in SM Surface Mount	MPO Metal Perf w/Overlay	U 120V-277V 347 347V	GLR Fast Blow Fuse GMF Slow Blow Fuse EL Emergency Battery Pack EL5 Emergency Battery Pack, T5 DG Dust Guard Clear Acrylic NYC NYC Compliant NYCU NYC Compliant, Union Label WIH wiHUBB Enabled ¹
SIZE	LAMP TYPE	BALLAST			
22 2' x 2'	14 2', T5: 14 Watt 17 2', T8: 17 Watt 24 2', T5HO: 24 Watt	E Electronic T8, Instant Start ED Electronic Dimming T8 and T5 EP Electronic T5, T5HO, or T8, Programmed Start 3E 3-Lamp Electronic T8, Instant Start 3EP 3-Lamp Electronic T5, T5HO, Instant or T8 Programmed Start			

¹ Not available with Surface Mount Ceiling Types

PHOTOMETRIC DATA

LUMINAIRE DATA

Luminaire	STE22-317G-MPO-3EU Stratus, Recessed/Architectural 2 x 2 2-lamp with perforated metal basket and opal overlay
Ballast	ICN-3P32-SC
Ballast Factor	0.92
Lamp	F17T8
Lumens per Lamp	1325
Watts	42
Shielding Angle	N/A
Spacing Criterion	0° = 1.20 90° = 1.31
Luminous Opening in Feet	Length: 1.92 Width: 1.92 Height: 0.00

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt.
0-30	716	18.0	26.7
0-40	1173	29.5	43.7
0-60	2095	52.7	78.1
0-90	2684	67.5	100.0
0-180	2684	67.5	100.0

ENERGY DATA

Total Luminaire Efficiency	67.5%
Luminaire Efficacy Rating (LER)	59
IESNA RP-1-1993 Compliance	Noncompliant
Comparative Yearly Lighting Energy Cost per 1000 Lumens	\$4.07 based on 3000 hrs. and \$0.08 per KWH


COEFFICIENTS OF UTILIZATION (%)

RCR	RC	80			70			50			0	
		RW	70	30	10	70	30	10	50	30	10	0
1	73	70	67	64	71	69	66	63	66	63	61	56
2	67	61	56	52	65	60	55	52	57	54	50	47
3	61	53	48	43	59	52	47	43	50	46	42	39
4	55	47	41	37	54	46	41	36	45	40	36	33
5	51	42	36	31	49	41	36	31	40	35	31	29
6	47	38	32	27	46	37	31	27	36	31	27	25
7	44	34	28	24	42	34	28	24	33	28	24	22
8	40	31	25	21	39	31	25	21	30	25	21	20
9	38	29	23	19	37	28	23	19	27	23	19	18
10	35	26	21	17	35	26	21	17	25	21	17	16

RCR = Room Cavity Ratio

RC = Effective Ceiling Cavity Reflectance RW = Wall Reflectance

INDOOR CANDELA PLOT

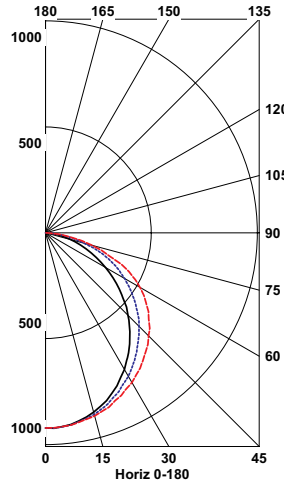


0.0 ——— 45.0 - - - - - 90.0 - - - - - 135.0

AVG. LUMINANCE (Candela/Sq. M.)

Average Luminance Angle	0.0	22.5	45.0	67.5	90.0
0	2689	2689	2689	2689	2689
30	2508	2539	2633	2711	2748
40	2359	2424	2584	2741	2798
45	2271	2362	2573	2767	2837
50	2162	2285	2548	2798	2889
55	2046	2204	2530	2836	2953
60	1904	2114	2517	2867	3008
65	1748	2004	2487	2847	2999
70	1579	1878	2416	2715	2740
75	1410	1692	2132	2437	2584
80	1127	1412	1833	2068	2136
85	905	1072	1374	1508	1541


DIMENSIONAL DATA

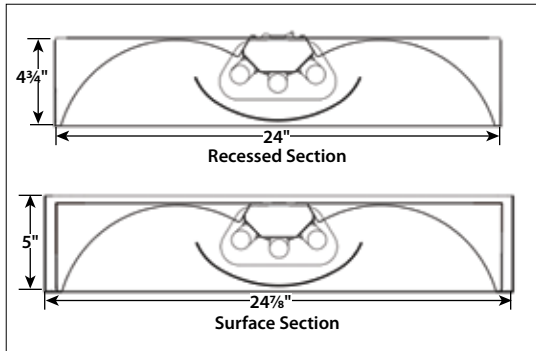


Top View

Surface K.O. Dimensions


A: 2" x 3" Access with (2) 3/8" Mount Supply Knockouts




CEILING COMPATIBILITY

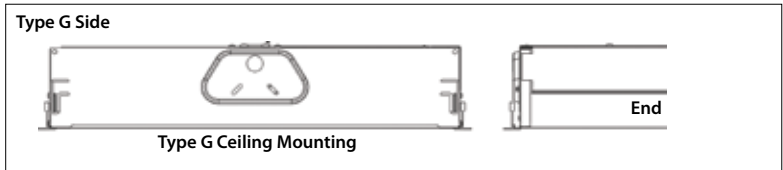

For lay-in installation in exposed grid ceilings. Maximum tee widths of 1" and maximum heights of 1 1/2" allowed.

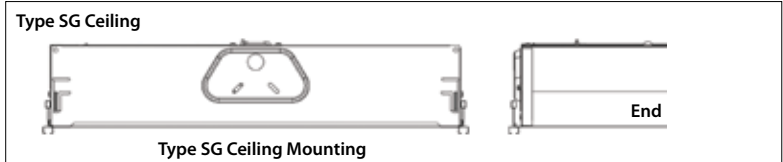

For 3/8" slot grid type ceilings. Luminaire will be recessed 3/8" horizontal surface of the tee. Slot grid tees must be field installed all around the fixture.

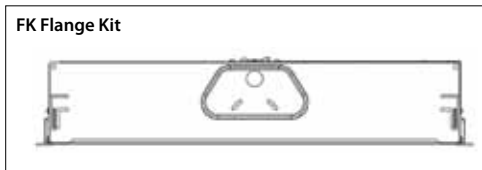

For hard ceiling applications, fixtures must be ordered with a flange kit that wires directly into the concealed ceiling opening for a clean finished appearance. For row configurations contact your local Columbia Representative.

Flange kit cut out dimension for single FK22 only: 24 3/8" x 24 3/8"

NOTE: All dimensions are in inches; dimensions and specifications are subject to change without notice. Please consult factory or check sample for verification.