



Standard Duty Residential Lever ANSI/BHMA Grade-3 Specifications




Available UL LISTED



Meets ADA Regulations

	A	B	C	D
Waverlie	4-3/4"	1-5/8"	2-1/2"	1-1/2"
Georgia	4-1/2"	2.0"	2-1/2"	1-1/4"
Jayne	4-11/16"	1-5/8"	2-1/2"	1-1/4"
Avery	4-1/2"	2.0"	2-1/2"	1/2"
Daley	4-1/8"	2.0"	2-1/2"	2.0"
Erin	4-1/2"	2.0"	2-1/2"	1/2"

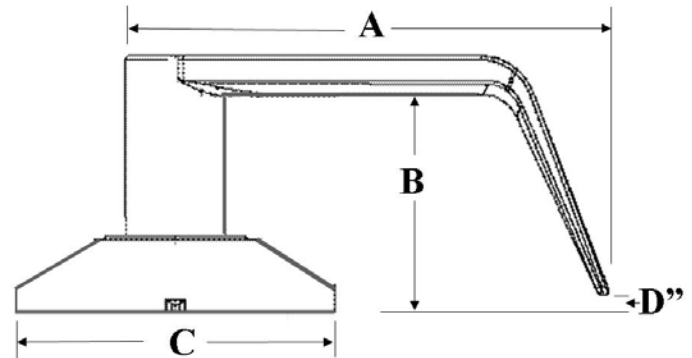

Lever Specifications & Options	
ANSI / BHMA	ANSI 156.2 Grade-3.
Cylinder	5 pin "KW1" std. 5 pin "C" optional .
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable latch optional.
Strike	PT-LS06: 2-3/4" full lip round corner strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/8", Max 1-3/4"
Handing	All are non-handed except Waverlie 1/2 dummy is handed.
U.L. Labeled	Available 90-minute U.L. Labeled.
Warranty	Lifetime mechanical, 10 year finish.

STYLE	In Stock Finish							Case Qty
	SS	TB	AB	AN	BC	PB	PS	Units
Waverlie	x	x		x	x	x	x	18
Georgia	x	x					x	18
Jayne	x	x					x	18
Avery	x						x	18
Daley	x						x	18
Erin	x						x	18

Function	Operation
2220 Passage	Both levers always free turning. No locking operation.
2230 Privacy	Inside turn-button locks and unlocks both levers. Lever can be unlocked by rotating the outside privacy mechanism.
2231 Restroom	Inside push button locks both levers. Rotating inside lever will unlock both levers.
2240 Entry	Outside key or inside turn-button locks both levers.
2290 Dummy	1/2 Dummy - Used as pull or decorative trim only.