




Copper Creek Hardware E-Series - 2 Piece Residential Handleset Specifications



CH2610
Colonial Style
2-Piece Handleset

HH2610
Heritage Style
2-Piece Handleset

		CH	HH
A	Cross Bores on Center	5-1/2"	5-1/2"
B	Plain Latch to Thru-bolt (on Center)	8-7/16"	8-7/16"
C	Deadbolt Rose Height	3-3/8"	3-1/2"
	“ “ Width	2-5/8"	2-3/8"
D	Main Escutcheon Height	4-1/8"	4-3/8"
	“ “ Width	3"	2-3/4"
E	Overall Gripset Height	12"	12"
F	Lower Escutcheon Height	2-7/16"	2-9/16"
	“ “ Width	1-7/8"	1-5/8"

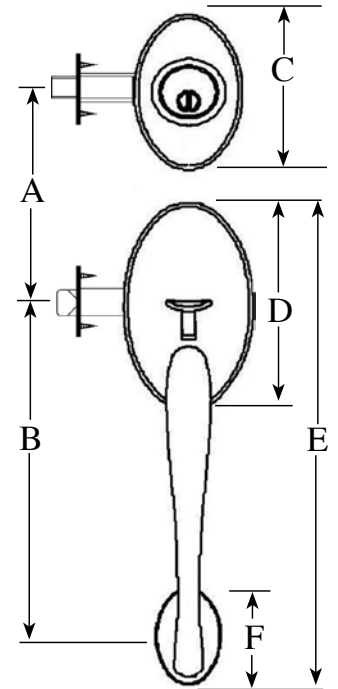

Available
UL LISTED

Handleset Specifications & Options	
Construction	Solid Forged Brass Handleset & Rosette.
Cylinder	Brass 5 pin KW1 std., 5 pin "C" optional.
Keying	As specified: Available Master keyed, Builder keyed, KD, KA
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable optional.
Strike	Plain latch: Full lip round corner. Deadbolt: 2-1/4"x 1" round corner. Others available.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" or 2-3/4" backset. Deadbolt & plain latches on 5-1/2" spacing.
Door Thickness	Min 1-3/8", Max 1-3/4". Thick door kits for 2-1/4" doors available.
Handing	All E-Series Handlesets are non-handed.
U.L. Labeled	Available 20-minute U.L. Labeled.
Warranty	Lifetime mechanical, 10 year finish.

Available Finishes									Case Qty
SKU #	SS	TB	AB	AN	BC	PB	PS	PW	Units
Colonial	x	x	x	x	x	x	x	x	6
Heritage	x	x		x	x	x	x		6
Function		Operation							
2610 Active	Deadbolt thrown by rotating interior turn-piece or exterior key. Plain-latch retracted by interior knob/lever or exterior thumb piece.								
2620 Double Cylinder	Deadbolt thrown by rotating interior or exterior key. Plain-latch retracted by interior knob/lever or exterior thumb piece.								
2690 Dummy	Non-active function. Exterior gripset and interior knob/lever act as pull only.								