



# Copper Creek Hardware P-Series Low Profile Heavy Duty Deadbolt Specifications



**DB4410**  
*Single Cylinder  
Deadbolt*




Meets ADA  
Regulations



Available  
UL LISTED

- *Concealed Screws.*
- *Snap on Designer Interior Turn Piece.*
- *Elegant Interior Rosette.*
- *Solid Brass Cylinder & Plug.*
- *Steel Latch and Latch Face.*
- *Nickel Plated Bolt.*
- *Low Profile Construction.*
- *Large Bow Key.*

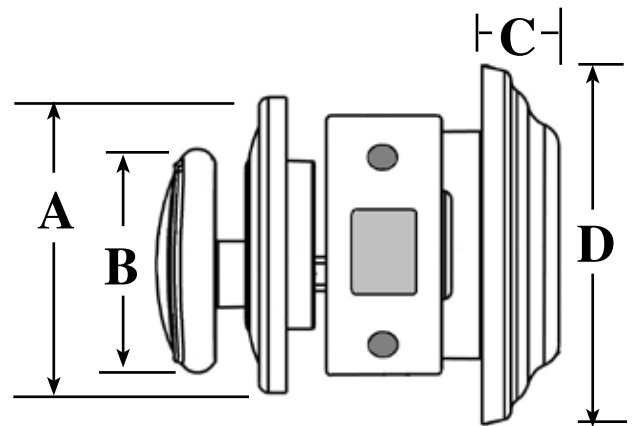

	A	B	C	D
<b>DB4410</b>	2-9/16"	1-15/16"	15/16"	2-9/16"
<b>DB4420</b>	2-9/16"	n/a	15/16"	2-9/16"

Deadbolt Specifications & Options	
ANSI / BHMA	Exceeds ANSI Grade-2 - 400,000 cycles
Guard Diameter	2-9/16".
Cylinder	5 pin "KW1" std., 5 pin "C" optional.
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable optional.
Strike	PT-DS16 and PT-DS26: Round corner strikes std. Others available.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/4", Max 1-3/4".
Handing	All P-Series deadbolts are non-handed.
U.L. Labeled	Available 90-minute UL Labeled.
Warranty	Lifetime mechanical, 10 year finish.

SKU #	Available Finishes								Case Qty
	SS	TB	AB	AN	BC	PB	PS	PW	Units
<b>DB4410</b>	x	x	x	x	x	x	x	x	12
<b>DB4420</b>	x	x	x	x	x	x	x	x	12

Function	Operation
4410 Single Cylinder Deadbolt	Inside turn-piece and exterior key throws or retracts the 1" deadbolt latch.
4420 Double Cylinder Deadbolt	Outside and inside keyed cylinders throw or retract 1" deadbolt latch.