



Copper Creek Hardware E-Series ANSI/BHMA Grade-3 Standard Duty Residential Lever Specifications



*BL2200 Series
Braxton Style*



*JL2200 Series
Jayne Style*



*HL2200 Series
Hailey Style*



*WL2200 Series
Waverlie Style*




Available
UL LISTED



Meets ADA
Regulations

	A	B	C	D
Braxton	4-3/4"	1-7/8"	2-9/16"	1-1/2"
Hailey	4-9/16"	1-7/16"	2-9/16"	1-1/4"
Jayne	4-11/16"	1-5/8"	2-9/16"	1-1/4"
Waverlie	4-3/4"	1-1/8"	2-9/16"	1-1/8"

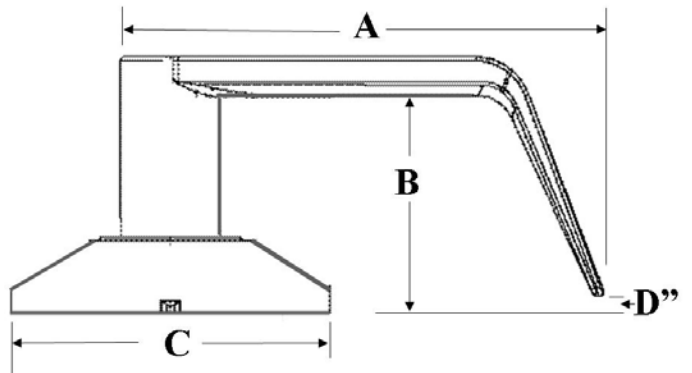

Lever Specifications & Options	
ANSI / BHMA	ANSI 156.2 Grade-3.
Rose Diameter	2-9/16".
Cylinder	5 pin "KW1" std. 5 Pin "C" optional .
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable latch optional.
Strike	PT-LS06: 2-3/4" full lip round corner strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/8", Max 1-3/4"
Handing	Braxton, Hailey & Jayne Levers are non-handed. Waverlie is handed.
U.L. Labeled	Available 90-minute U.L. Labeled.
Warranty	Lifetime mechanical, 10 year finish.

In Stock Finish										Case Qty
STYLE	SS	TB	AB	AN	BC	PB	PS	PW	Units	
Braxton	x	x	x	x	x	x	x	x	18	
Hailey	x	x		x		x	x	x	18	
Jayne	x	x	x				x		18	
Waverlie	x	x		x	x	x	x	x	18	

Function	Operation
2020 Passage	Both levers always free turning. No locking operation.
2030 Privacy	Inside turn-button locks and unlocks both levers. Lever can be unlocked by rotating the outside privacy mechanism.
2040 Entry	Outside key or inside turn-button locks both levers.
2090 Dummy	1/2 Dummy - Used as pull or decorative trim only.