



# Copper Creek Hardware P-Series Heavy Duty Residential Lever Specifications




TL4200 Series  
Tienna Style



Available  
UL LISTED



Meets ADA  
Regulations

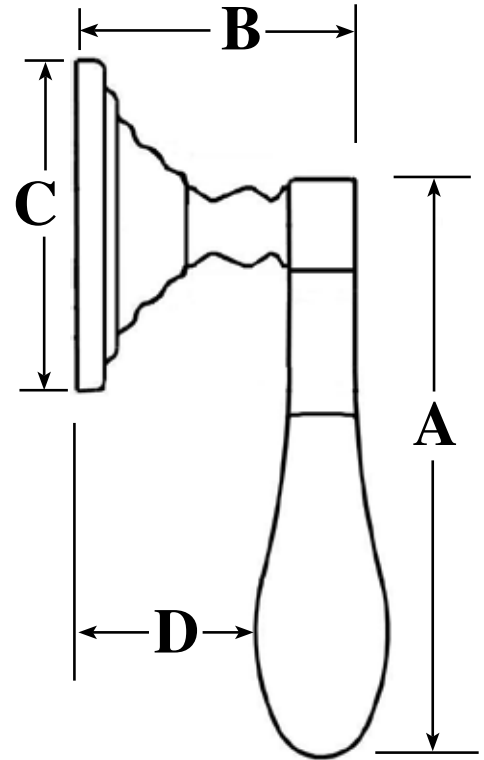

A	B	C	D
4-1/2"	2-18"	2-3/4"	1-3/8"

Lever Specifications & Options	
ANSI / BHMA	Exceeds ANSI Grade-2 - 400,000 cycles
Rose Diameter	2-3/4".
Cylinder	5 pin "KW1" std. 5 Pin "C" optional .
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable latch optional.
Strike	PT-LS06: 2-3/4" full lip round corner strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/8", Max 1-3/4".
Handing	Tienna 4225 and 4290 functions are non-handed and reversible. KIL 4240 function is handed.
U.L. Labeled	Available 90-minute U.L. Labeled.
Warranty	Lifetime mechanical, 10 year finish.

In Stock Finish		Special Order Finishes							Case Qty
STYLE	SS	TB	AB	AN	BC	PB	PS	PW	Units
TL	x	x	x	x	x	x	x	x	18

Function	Operation
4225 Passage & Privacy	Field convertible function for both Passage and Privacy applications.  Passage: Both levers always free turning. No locking operation.  Privacy: Inside turn button locks or unlocks both levers.
4240 KIL Entry	Outside key or inside turn-button locks both levers.
4290 Dummy	1/2 Dummy - Used as pull or decorative trim only.