

Emmons 3, 5, 9 and 12 Light Chandelier

3139003, 3139005
3139009, 3139012 1.0

GENERATION LIGHTING

CHANDELIER

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

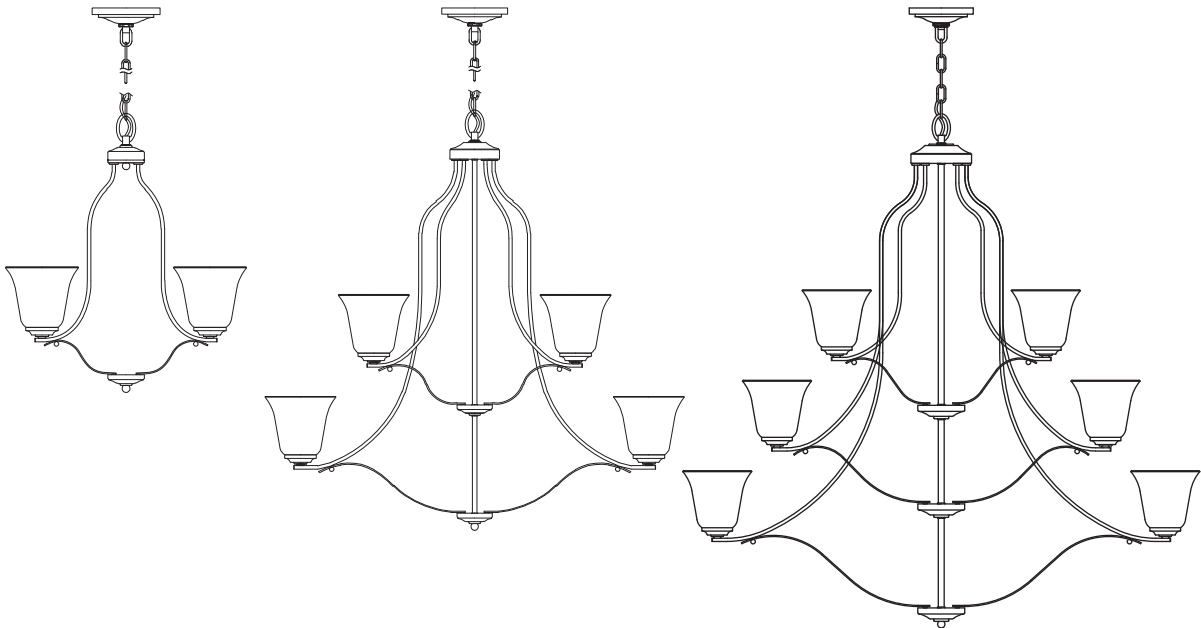

SAVE THESE INSTRUCTIONS!

Install the Fixture

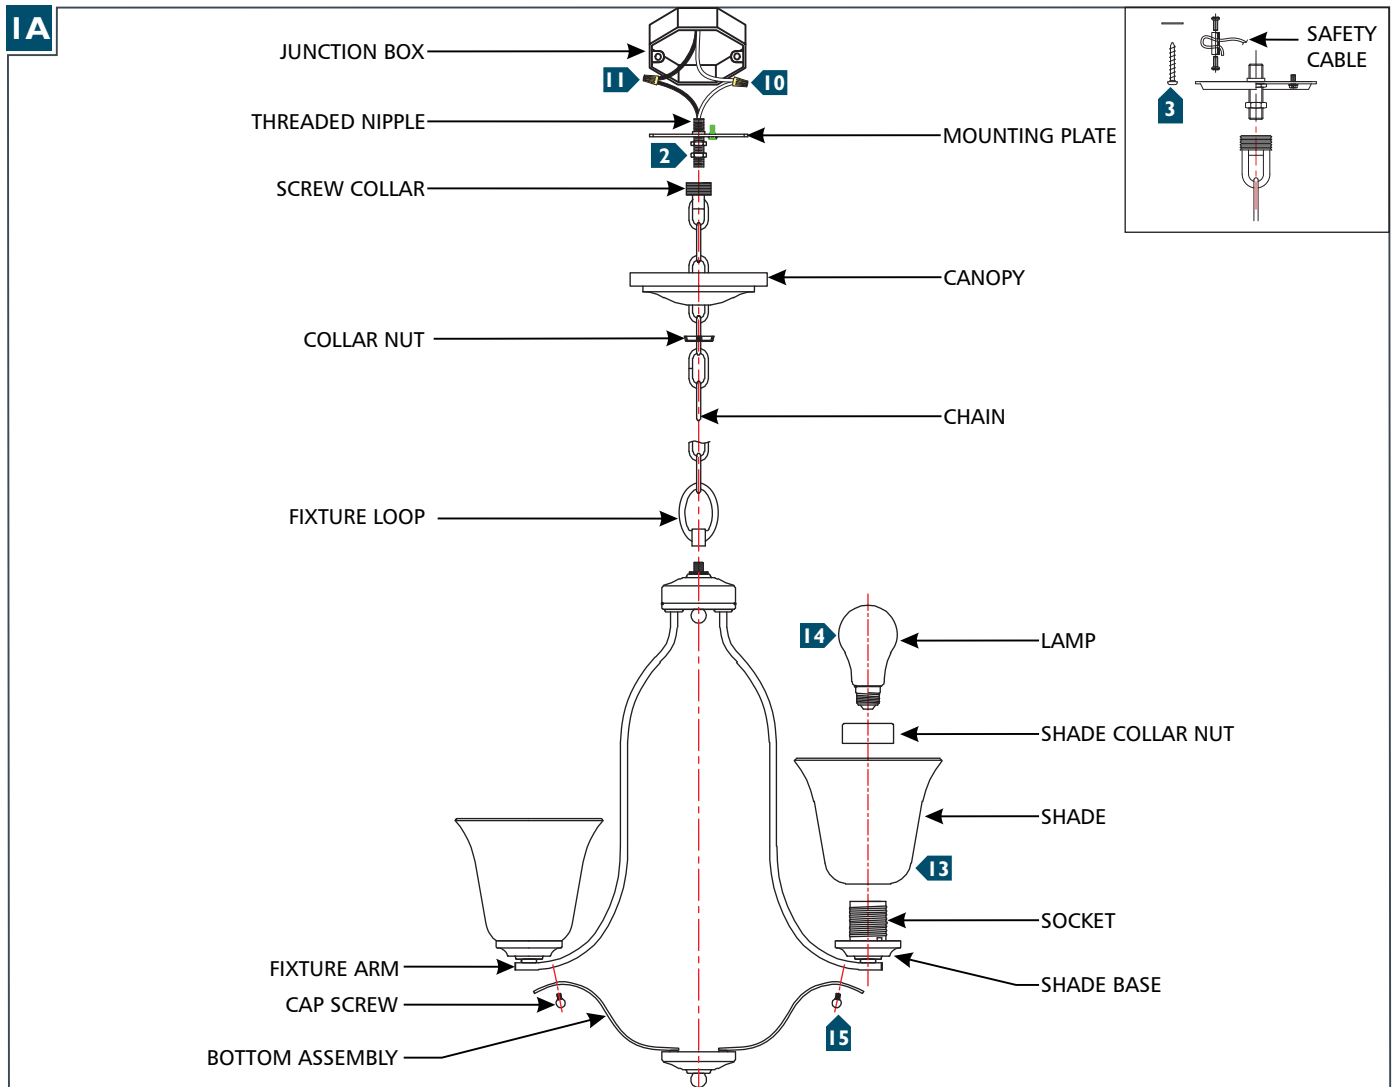

- 1** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** **For 3139012 only:** Secure the safety cable to a secure solid structure in accordance with local building code.
- 4** Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
- 5** Screw the fixture loop onto the fixture. Open the chain link with pliers and install the chain on the fixture loop, then re-close the chain link.
- 6** Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
- 7** Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture, re-close the link.
- 8** Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Place the shade onto the shade base and secure it in place by screwing the shade collar nut onto the socket. Repeat for all shades.
- 14** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 15** **For 3 and 5 Light Models Only:** Install the bottom assembly to the bottom of the fixture arms using the cap screws.