

Moffet Street Island

6634506, 6634507 1.2

GENERATION LIGHTING

Pendant

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

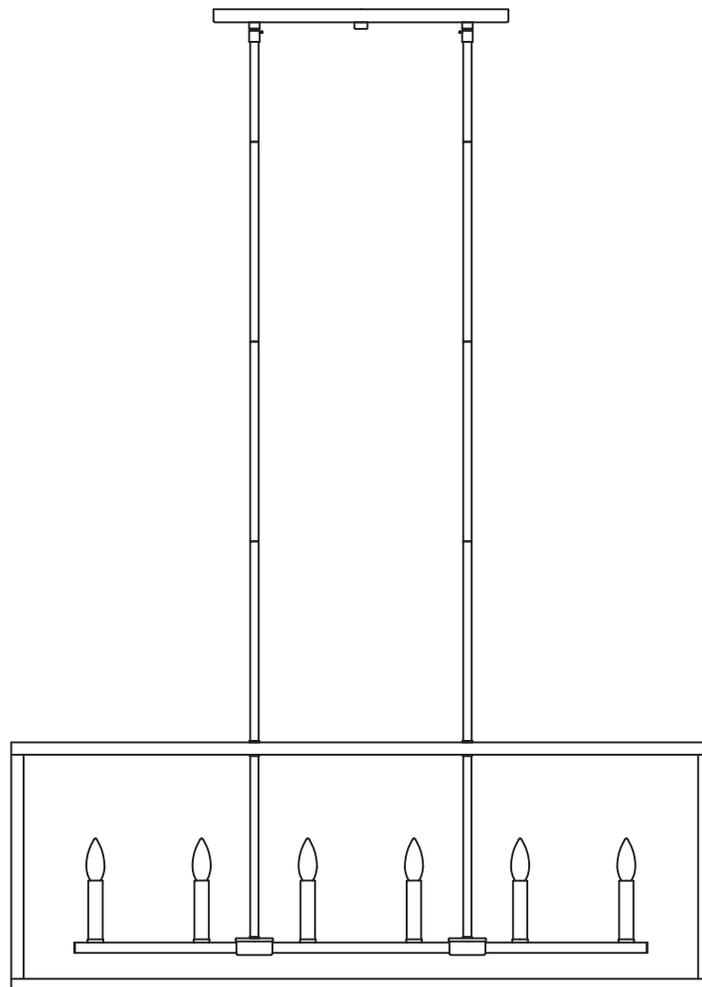

SAVE THESE INSTRUCTIONS!

Install the Fixture

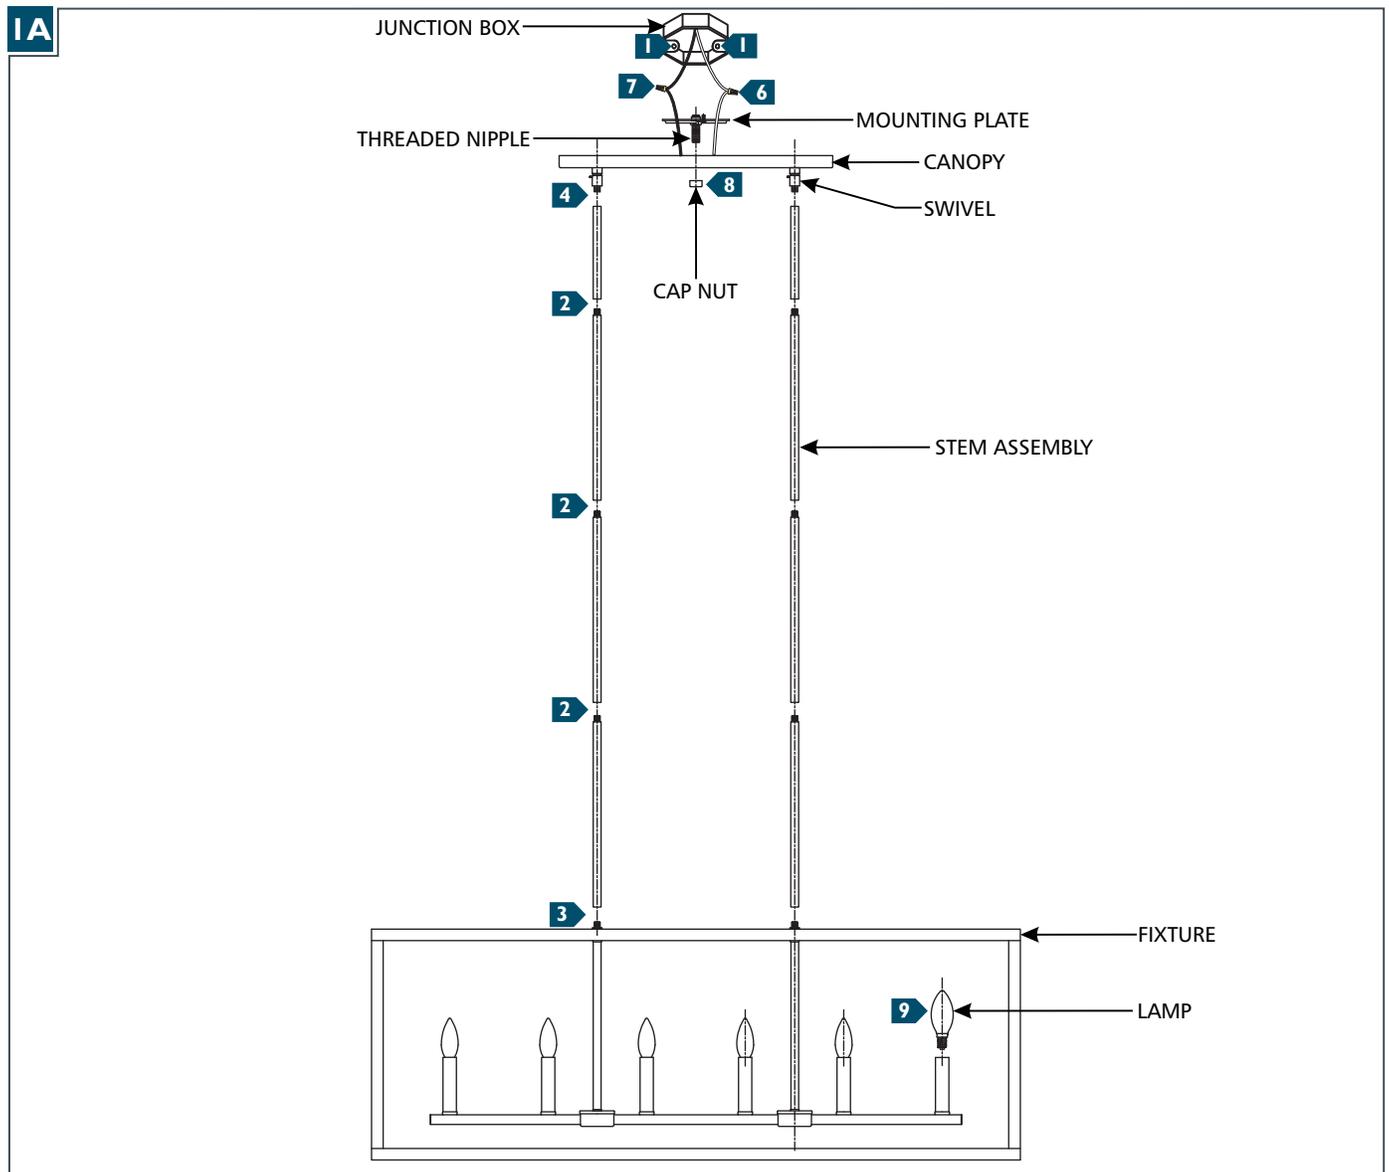

- 1** Secure the mounting plate to the junction box.
- 2** Determine the wanted height or look of the fixture with the provided stems and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 3** Feed the fixture wires through the stems and screw the stem assembly to the top of the fixture.
- 4** Feed the fixture wires through the canopy and screw the swivels onto the stem assemblies.
- 5** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 8** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the cap nut onto the threaded nipple.
- 9** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.