

# 6in Traverse Lyte Round T24

145\_S | 1.5

## GENERATION LIGHTING CEILING

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

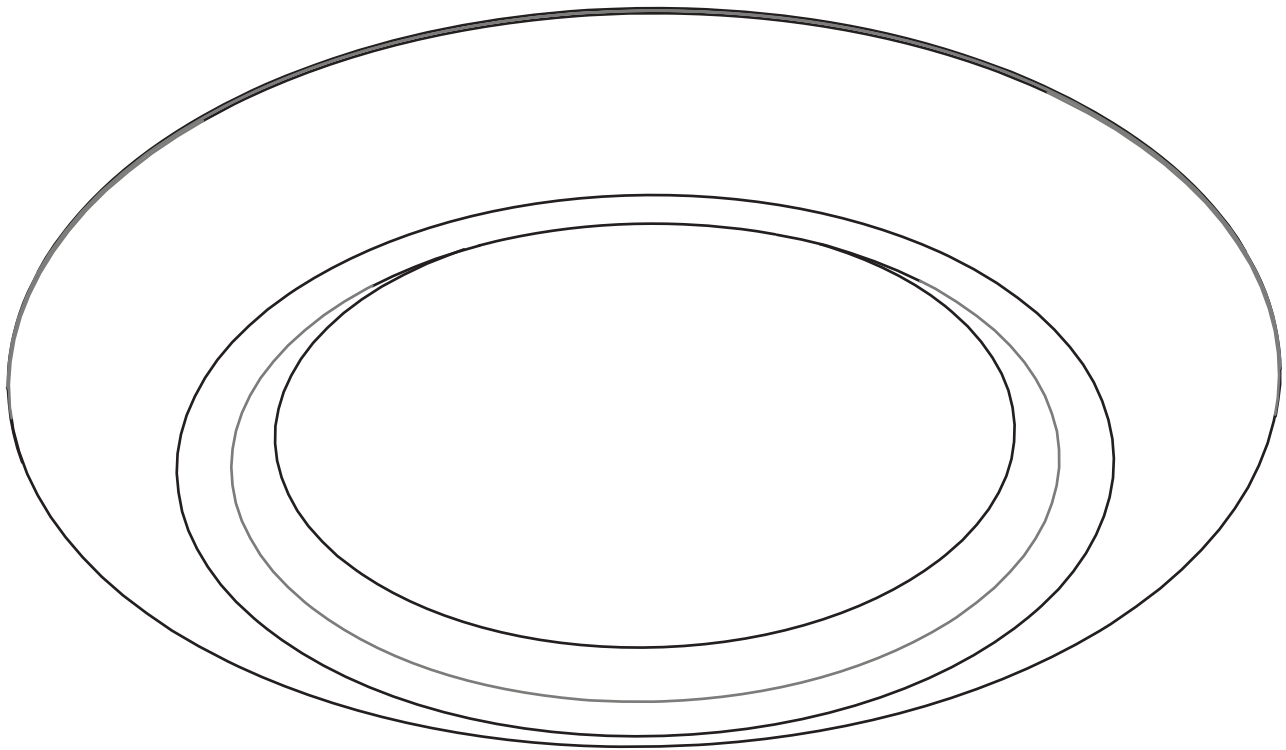

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

## Install the Fixture

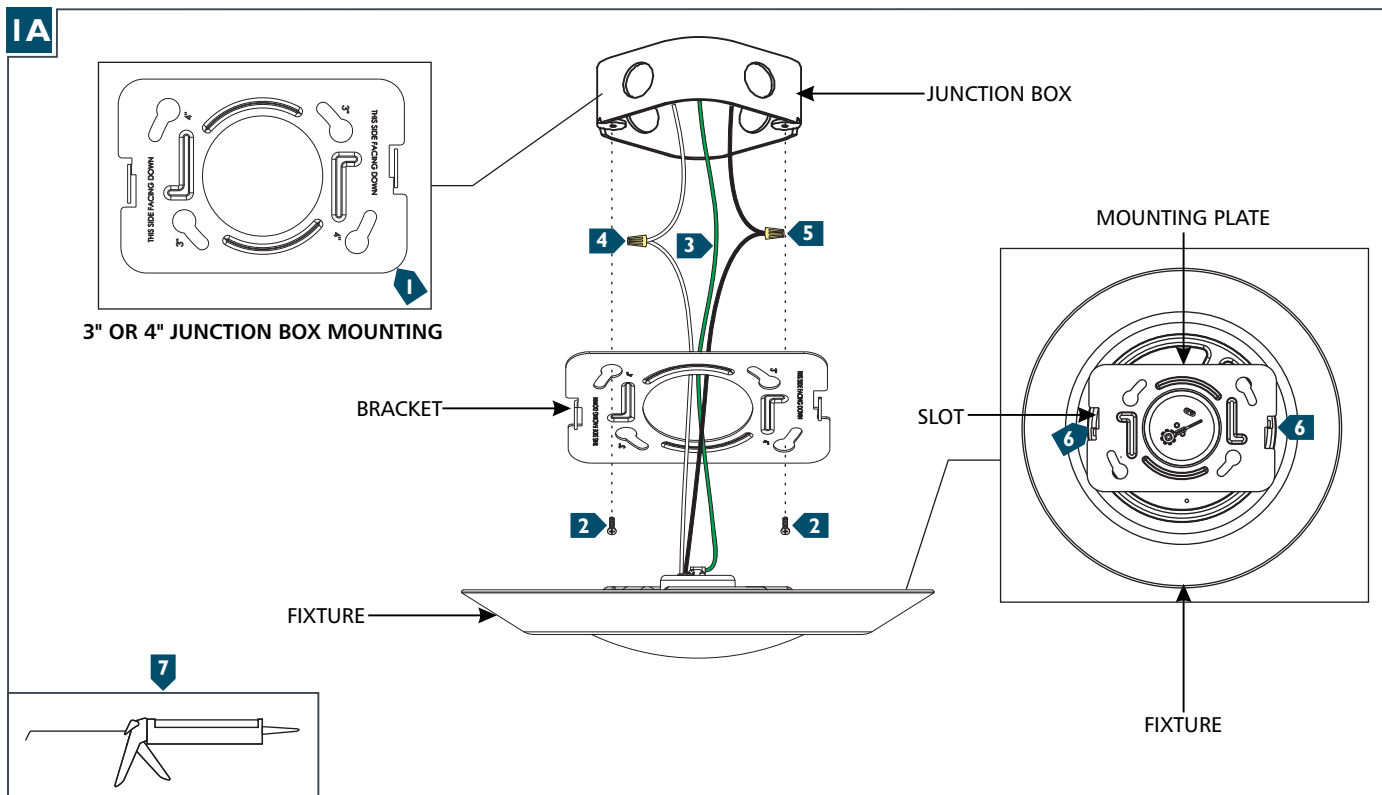

- 1** Determine which keyed holes on the mounting plate are compatible with your junction box.
- 2** Using the mounting plate holes compatible with your junction box, place the mounting plate slots over the screws. Rotate and hold the mounting plate while tightening the screws. **Note:** Do not over tighten screws as it may bend the mounting plate and cause the fixture to not sit flush.
- 3** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.
- 6** Align the slots on the fixture with the brackets on the mounting plate, push the fixture flush against the ceiling, and rotate it clockwise to lock in place. **Make sure the fixture is fully secured before releasing.**
- 7** For wet locations, use 100% silicone to caulk 1/8" bead of silicone around the base of the fixture after it has been locked to the ceiling. Wait the designated silicone cure time before exposing the unit to wetness. **Optionally: you can use Seagull Gasket # 620390 instead of silicone for wet locations.**