

RONDE SMALL, MEDIUM, & LARGE ONE LIGHT OUTDOOR WALL LANTERNS

GLO1061; GLO1071; GLO1081

General Product Information



Tools Required/Suggested



Safety Information

CAUTION-RISK OF FIRE







This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

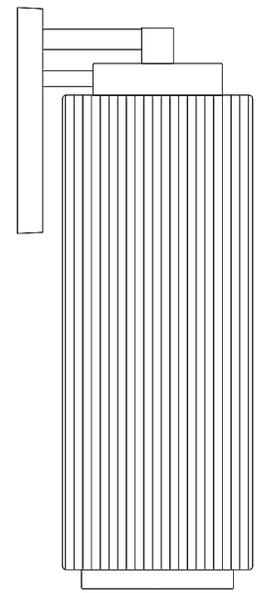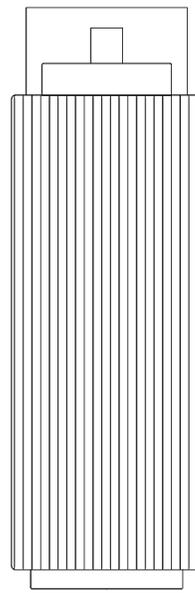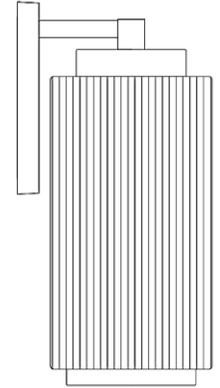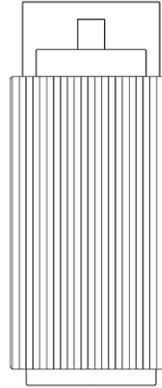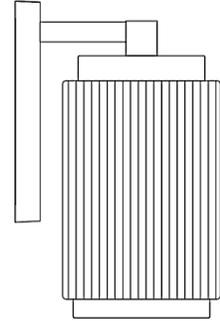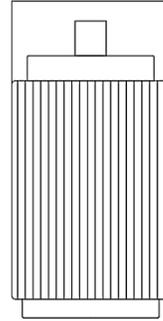

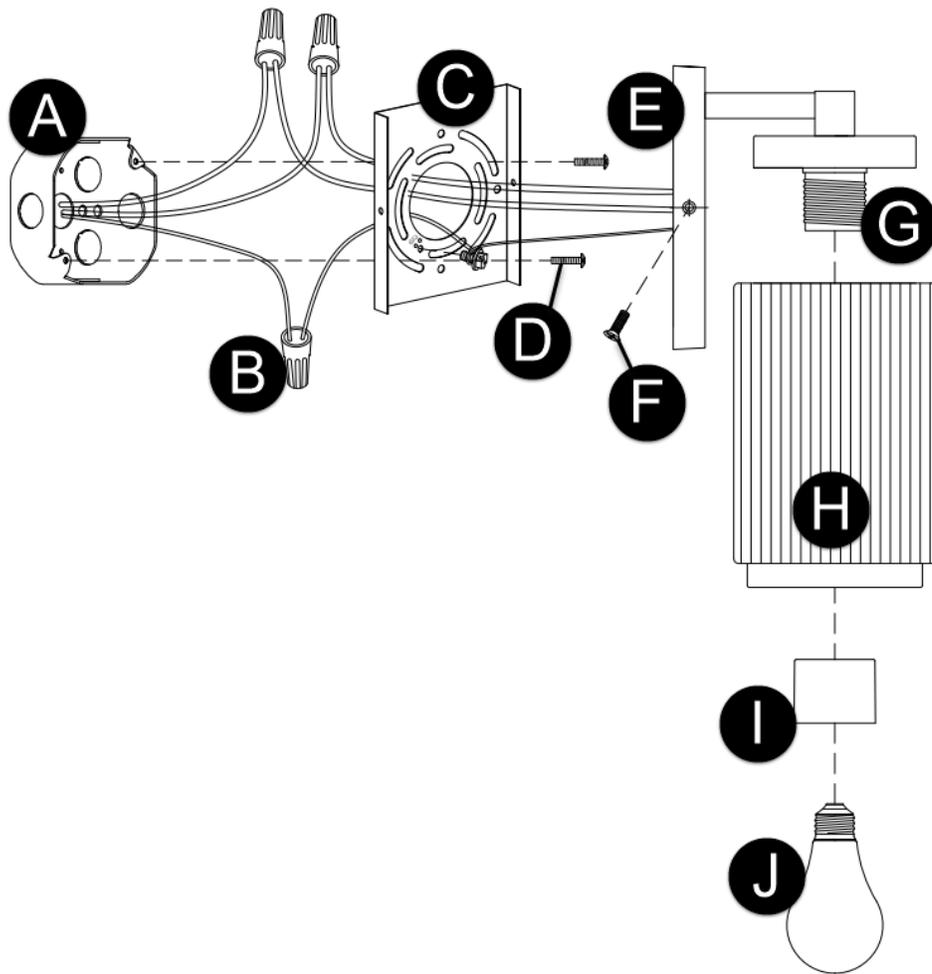

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Fixture Base
- F. Fixture Screws
- G. Socket
- H. Glass Shade
- I. Shade Collar
- J. Bulb (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the fixture base.
2. Secure the mounting plate to the junction box with the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black) fixture wire to hot power line wire
 - b) Neutral (white) fixture wire to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate.

III. Installing the Fixture

1. Mount the fixture base onto the mounting plate and secure it in place by installing the fixture screws.
2. Install the glass shade to the shade base by screwing on the shade collar over it securely.
3. Screw the bulb into the socket. Refer to the socket label for max wattage information.
4. For wet locations, caulk around the base of the fixture with waterproof construction sealant.