

WALL

SHOWSCAPE™

GLAZED CERAMIC





Turn Any Room into a Showpiece

When design meets innovation, this stunning series is the result. Showscape features Daltile's Visual Imaging[™] technology to create striking designs using color dimension and depth, resulting in a multisensory experience of tone and texture. The engaging patterns in this collection are synchronized to flow together regardless of the tile direction. Combined with multiple color options, it provides a range of creative possibilities.

• EASY DESIGN EXPRESSION

- A variety of tones and patterns provide a multitude of combinations to satisfy any creative vision
- Pattern tiles are synchronized to flow together regardless of the tile direction, providing even more options that are easy to execute
- Jolly trim is available in coordinating solid colors to finish off the look

• ENGAGE YOUR SENSES

- Visual Imaging™ technology adds raised pattern texture that is pleasing to the touch
- Colors ranging from neutral to bold provide visual appeal to match any style

- POST-CONSUMER RECYCLED MATERIALS
- PRE-CONSUMER RECYCLED MATERIALS
- VI VISUAL IMAGING™

All or select items within this series meet the requirements for these qualifications. For more product information, visit daltile.com.

WALL SHOWSCAPE™ GLAZED CERAMIC

WALLTILE



ALMOND SH10 (1)





STYLISH WHITE SHO9 (1)

DEEP GRAY SH12 (1)

VIVID GREEN SH15 (2)

CRISP BLUE SH16 (2)


CURRANT SH17 (2)

PATTERN OPTIONS* (Available in all 7 colors)




STYLISH WHITE SH09 (1) ALMOND SH10 (1)







WALL TILE AND JOLLY - COORDINATING SOLID COLORS







VIVID GREEN SH15 (2)

ARABESQUE (A)





(1) and (2) indicate price groups, (1) being the least expensive.

SHOWSCAPE™

GLAZED CERAMIC

SIZES


		Thickness	Sq. Ft. per Carton	Pieces per Carton
	(12" x 24") (30.51 cm x 61.08 cm)	3/8"	16.00	8

APPLICATIONS

	Suitable
Floors	
Walls/Backsplashes	✓
Countertops	
Pool Linings	

APPLICATION NOTES:

Suitable for exterior wall applications in non-freezing climates only when proper installation methods are followed.

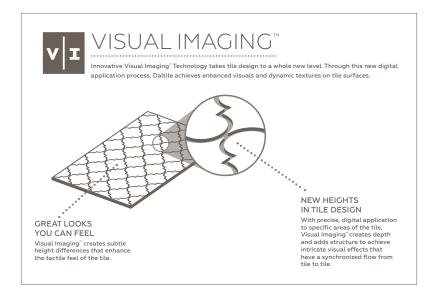

TRIM

Туре	Number	Size	Pieces per Carton
12" Jolly	S-1/212J	1/2 x 11-15/16	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (1/8" when installed in a staggered brick-joint pattern; overlap should not exceed 33%)*	Low (V1)

^{*} Use straight-joint only when using the same pattern.

TEST RESULTS

	ASTM#	Wall Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs.
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant

NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at daltile.com/Factors.





