

Assembly Instructions: 0879-LP

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (A) contains several threaded holes. Line up the holes in backplate (F) with the holes in the mounting strap (A). Remove the backplate (F) and secure mounting strap (A) to the junction box with mounting screws (B) and a screwdriver. Tighten the screws securely. Pull house wires through center of mounting strap. For added stability utilize screws (P) and nuts (Q) to further secure mounting strap (A) to the ceiling.

ASSEMBLING THE FIXTURE

2. Take wood block (C) and place it on its side on the floor. Unscrew rounded nut bolt cap (I) from screws (H) on steel panels (G) to attach the panels to each side of the wood block (C) via metal frames (D). Hold panels (G) over the holes in metal frame (D) until screws (H) protrude from the holes underneath the metal frame (D) under wood block (C). Screw on nut bolt cap (I) onto the exposed threads of screw (H) to attach panel (G) to metal frame (D). Tighten with a wrench to secure. Repeat steps on the other side.

3. Measure to determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach chain connectors (K) to each end of chains (N). Use one end of the chains with chain connector to attach chains (N) to top loops (L). Close each chain connector to secure. Feed the fixture's wires up through one side of the chain (every three links or so), pulling the wires until taut. Use the remaining end of the chains to secure chain and chain connectors to the canopy loops (J). Close chain connectors to secure. Feed fixture wires through canopy (F).

CONNECTING THE WIRES


4. Have an assistant support the weight of the fixture while completing the wiring. Cut away excess wire. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (A). Connect black to black (transparent wire with black thread or smooth); white to white (transparent wire with white thread or ribbed); ground to ground (green, transparent with green thread, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on the mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

5. Lift canopy (F) up to the mounting strap (A) and line up the holes in canopy (F) with the holes in mounting strap (A). Use screws (O) to attach the canopy (F) to the sides of the mounting strap (A). Tighten the screws securely.


6. Install light bulbs (not provided) in sockets (M) in accordance with the fixture's specifications. Do not exceed maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

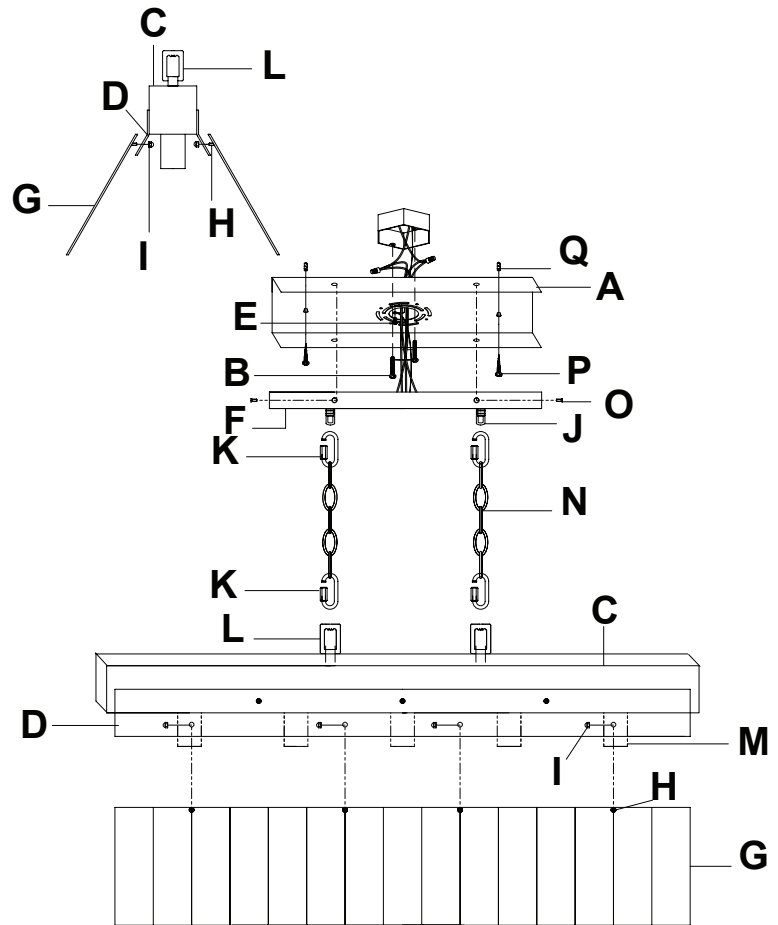

How to Identify the Fixture's Wires

Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	



CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

