



FLOOR

**SIERRA™**  
GLAZED CERAMIC

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Above and cover photos feature Vail 12 x 12 field tile in a brick-joint pattern on the floor.

## Create a Room that Makes a Statement


If you're looking for a tile that's as attractive as it is durable, try Daltile's Sierra™ series. Subtle tone variations and a soft matte glaze create a beautiful visual effect.

- ALLURING DESIGN
  - Subtle tone variations adds a beautiful visual effect to room
  - Features a neutral color palette that easily coordinates into multiple designs
- MULTIFACETED BEAUTY
  - For added versatility, design includes five colors and two sizes



**PRE-CONSUMER  
RECYCLED MATERIALS**


FIELD TILE

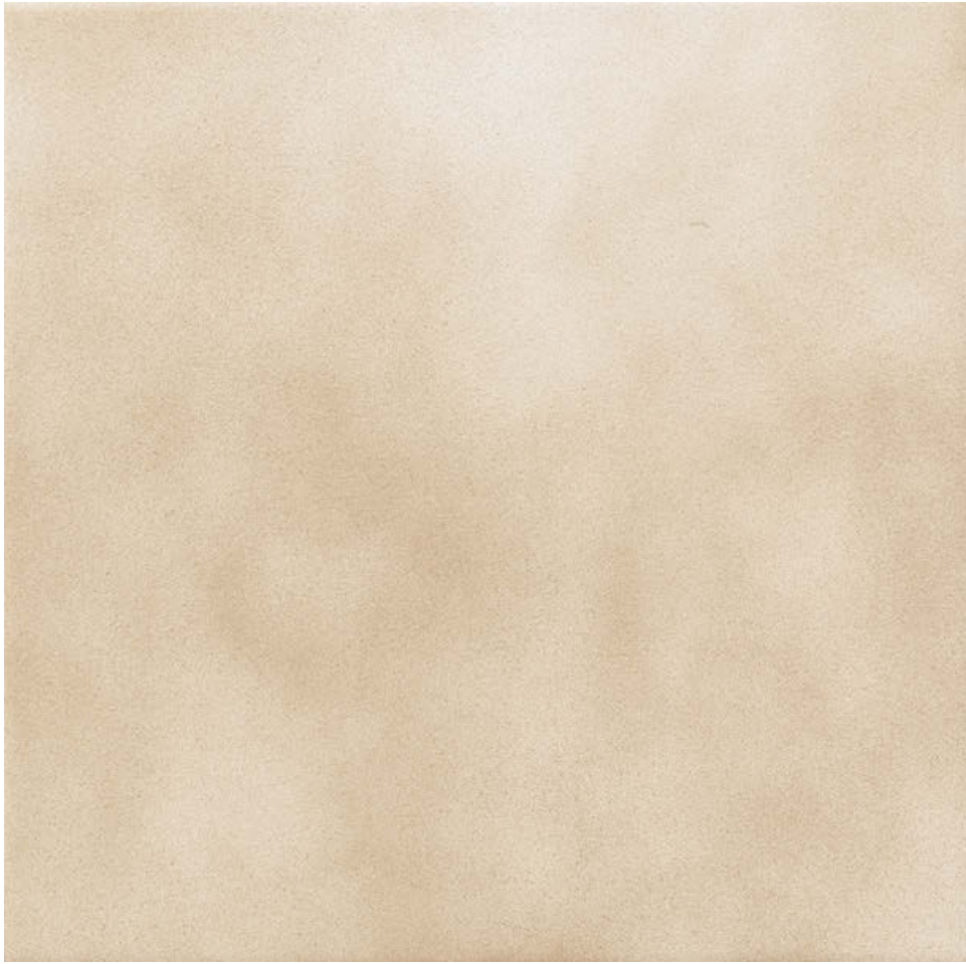

VAIL 1535



RAINIER 1500



ALMOND 2009



ASPEN 1525





BLACK 2011

# SIERRA™

GLAZED CERAMIC

## SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	12 x 12 Field Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	11.00	11
	8 x 8 Field Tile	(7-7/8" x 7-7/8") (20.00 cm x 20.00 cm)	5/16"	11.00	25

## FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1–2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit [www.daltile.com/dcof](http://www.daltile.com/dcof).


## OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

### APPLICATION NOTES:


Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

## TRIM

Type	Number	Size	Pieces per Carton
 Bullnose	P-43C9	3 x 12	22

Bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 Low (V1)

## TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs.
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

## NOTES

**Manufacturer Warning:** These tiles have a dynamic coefficient of friction less than 0.42 as measured by the DCOF Acutest method. Tiles with DCOF Acutest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall or personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).

Use of a latex modified thin-set is recommended for proper installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DAL TILE.COM](http://GET.DAL TILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (5/16)