

AYERS ROCK[™] with REVEAL IMAGING[™]

floor • wall • countertop

GLAZED PORCELAIN

with any installation.

Combining the look of natural stone with the easy maintenance of glazed porcelain, Ayers Rock is the perfect tile for any residential or commercial space. Featuring Reveal Imaging, Ayers Rock has a realistic natural slate visual and texture. Its rich, natural variation and beautiful color options make it a distinctive statement of elegance. Complete with five modular field sizes, mosaics, decorative accents, and a full trim package, this tile will create an upscale impression



Photo features Solar Summit 20 x 20 field tile on the floor and $6-1/2 \times 6-1/2$ field tile on the back splash.

1,

$\begin{array}{c} \text{AYERS ROCK}^{\text{\tiny M}} \\ \textit{with REVEAL IMAGING}^{\text{\tiny M}} \end{array} \qquad \text{GLAZED PORCELAIN} \end{array}$

Field Tile



SOLAR SUMMIT AYOI



GOLDEN GROUND AY02



RUSTIC REMNANT AY05



BRONZED BEACON AY03



MAJESTIC MOUND AY04

Mosaics



SOLAR SUMMIT AY01 3 x 3 Mosaic



MAJESTIC MOUND AY04 3 x 3 Mosaic



GOLDEN GROUND AY02 3 x 3 Mosaic



RUSTIC REMNANT AY05 3 x 3 Mosaic



BRONZED BEACON AY03 3 x 3 Mosaic



Decorative Accents







BRONZED BEACON AY03 Decorative Accent 3 x 13



MAJESTIC MOUND AY04 Decorative Accent 3 x 13




Close-up of Decorative Accent

Backsplash Design Ideas



Backsplash features Ayers Rock in Rustic Remnant $6-1/2 \times 6-1/2$ field tile, 3×3 mosaic, and 3×13 decorative accent, with Ion Metals $1-1/2 \ge 6$ chair rail in Antique Bronze.

Pattern Ideas

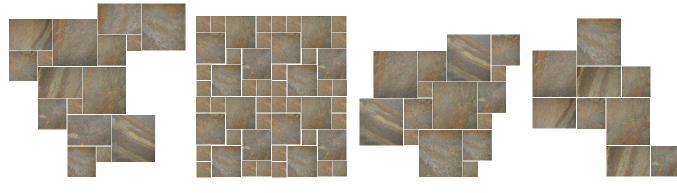

MODULAR VERSAILLES

MULTI-PINWHEEL

TRIAD HOPSCOTCH

BROKEN JOINT

		sq.ft. carton	PCS. PER CARTON
20 x 20 Field Tile	(19-11/16" x 19-11/16") (50.0 cm x 50.0 cm)	13.72	5
13 x 20 Field Tile	(13-1/8" × 19-11/16") (33.3 cm × 50.0 cm)	12.86	7
13 x 13 Field Tile	(13-1/8" x 13-1/8") (33.3 cm x 33.3 cm)	16.00	13
6-1/2 x 6-1/2 Field Tile	(6-1/2" x 6-1/2") (16.5 cm x 16.5 cm)	11.39	36
3 x 13 Decorative Accent	(3" × 13-1/8") (7.6 cm × 33.3 cm)		8
3 x 3 Mosaic	(Sheet 13-1/8" x 13-1/8") (Sheet 33.3 cm x 33.3 cm)	14.77	12

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	\bigvee	С	EP	ED

COMMERCIAL USAGE

		INTERIOR		EXTE	RIOR
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	\checkmark	\checkmark	~	~	\checkmark
Walls/Backsplashes	~	~	~	~	~
Countertops	~	~	~	~	~
Pool Decking	~			~	
Pool Linings	~	~	~	~	~

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

NOTES

Use of a latex modified thin-set is recommended for proper installation.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Special care needs to be given when installing tiles 20" and larger. Please refer to www.daltileproducts.com/LargeTiles for information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information, refer to "Factors to Consider" at www.daltile.com/CommercialFactors. Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to

these conditions require extra caution in product selection. Not for use on ramps.

TRIM

	ТҮРЕ	NUMBER	SIZE	PCS. PER CARTON
	Bullnose	S-43E9	3 x 13	36
\square	Cove Base	S-36E9T	6 x 3	30
ĺ	Cove Base Outcorner	SC-36E9T	l x 6	15

SHADE VARIATION

RANDOM (V4) Extreme color and texture variation from tile to tile and within each tile; a random look.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8"	3/16" (when rectangular sizes are used in a staggered brick-joint pattern, where the overlap does not exceed 33%.)

DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

I < .42		
2 ≥ .42		

STATIC C.O.F. (WET) : 3

I < .50			
2 .5059			
3 ≥ .60			

TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	≥ 0.48
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.70
Abrasion Resistance	C1027	4

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest[™] helps to assess a products suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.



GLAZED PORCELAIN





By their very design, Daltile products can help make it easier for you to earn LEED¹⁶ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.



PRE CONSUMER RECYCLED MATERIALS



EXTERIOR





©2012 Dal-Tile Corporation (6/12) SSDTAYERSRK