

GLAZED CERAMIC

BRAANACCACCI™



 **daltile**[®]
DESIGN WITH CONFIDENCE™



BRANCACCI™

GLAZED CERAMIC



floor • wall • countertop

The splendor, harmony and elegance of Roman architecture come to life with Braccacci. Equally at home on both floors and walls, this breathtaking glazed tile captures the essence of classic Italian craftsmanship that has withstood the test of time.



Photo features Windrift Beige 12 x 12 field tile in a diamond pattern with Universal Accent 3 x 12 border on the floor. Wall features coordinating Windrift Beige 9 x 12 wall tile with Windrift Beige 9 x 12 wall accent tile.

BRANCACCI™

GLAZED CERAMIC

floor • wall • countertop

Floor Tile



ARIA IVORY BC01



WINDRIFT BEIGE BC02



FRESCO CAFFE BC03

Wall Tile



ARIA IVORY BC01



WINDRIFT BEIGE BC02



FRESCO CAFFE BC03

Decorative Wall Accents



ARIA IVORY BC01



WINDRIFT BEIGE BC02

BRANCACCI™

GLAZED CERAMIC

Decorative Wall Accents



ARIA IVORY BC01
2 x 12 Resin Chair Rail



WINDRIFT BEIGE BC02
2 x 12 Resin Chair Rail



FRESCO CAFFÈ BC03
2 x 12 Resin Chair Rail



ARIA IVORY BC01
2 x 12 Arched Floral Listello



WINDRIFT BEIGE BC02
2 x 12 Arched Floral Listello




FRESCO CAFFÈ BC03
2 x 12 Arched Floral Listello

Decorative Universal Accent



UNIVERSAL BC10
3 x 12 Decorative Accent

Backsplash Design Ideas

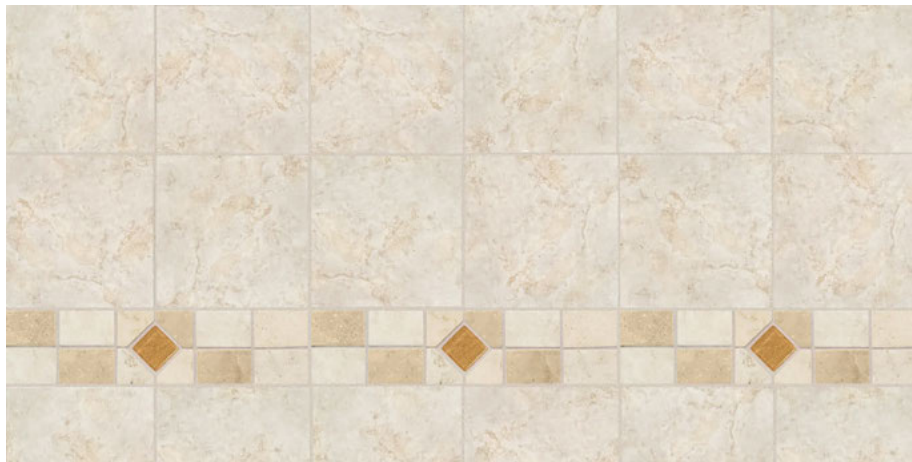

Backsplash features Brancacci in Aria Ivory 6 x 6 wall tile with Universal 3 x 12 Decorative Accent.

Pattern Ideas



GRID PATTERN



BRICK PATTERN WITH BORDER



BRICK-JOINT PATTERN



BRICK-JOINT PATTERN
WITH ACCENT



Project: Wilson & Muir Bank & Trust - Louisville, Ky Company: Jra Architects Arch Rep: Leslie Likins Designer: Robert Deal
Photo features Fresco Cafe 18 x 18 field tile and Continental Slate Indian Red and English Grey 18 x 18 field tile with Absolute Black Granite on the floor.

SIZES

		SQ.FT. CARTON	PCS. PER CARTON
18 x 18 Floor Tile	(17-7/8" x 17-7/8") (45.4 cm x 45.4 cm)	18.00	18
12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.0 cm x 30.0 cm)	11.00	11
12 x 18 Floor Tile	(11-13/16" x 17-7/8") (30.0 cm x 45.4 cm)	16.42	11
9 x 12 Wall Tile	(8-15/16" x 11-15/16") (22.7 cm x 30.3 cm)	11.25	15
6 x 6 Wall Tile	(6" x 6") (15.2 cm x 15.2 cm)	12.50	50
9 x 12 Wall Accent	(8-15/16" x 11-15/16") (22.7 cm x 30.3 cm)	--	12
3 x 12 Universal Decorative Accent	(2-7/8" x 11-13/16") (7.3 cm x 30.2 cm)	--	10
2 x 12 Arched Floral Listello/Chair Rail	(1-15/16" x 11-15/16") (4.9 cm x 30.3 cm)	--	12
2 x 2 Mosaic (Dot-mounted on 1' x 2 sheet)	(Sheet 11-15/16" x 23-15/16") (Sheet 30.2 cm x 60.9 cm)	24.00	12

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F*	W	C	EP**	

* Wall tile suitable for residential bathroom floors not subject to outside foot traffic, excluding accents.

** Floor tile suitable for non-freezing climates only (excluding accents).

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓*	✓	✓		
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking	✓	✓	✓	✓	✓
Pool Linings**	✓	✓	✓	✓	✓

Suitable for non-freezing climates when proper installation methods are followed. Wall Accent pieces suitable for use on wall/backsplashes only.

* Wall tile suitable for residential bathroom floors not subject to outside foot traffic, excluding accents.

** Mosaic suitable for pool linings in non-freezing climates only.

NOTES

Manufacturer Warning: These wall tiles have a dynamic coefficient of friction less than 0.42 as measured by the DCOF Acutest method. Tiles with DCOF Acutest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall or personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

TRIM

	TYPE	NUMBER	SIZE	PCS. PER CARTON
	Bullnose Corner	S-886	2 x 2	108
	Bullnose	P-43C9	3 x 12	22
	Bullnose	S-43C9WL	3 x 12	22
	Bullnose	S-4309	3 x 9	54
	Bullnose Corner	SN-4309	3 x 3	32
	Bullnose	S-4669	6 x 6	50
	Bullnose Corner	SCRL-4669	6 x 6	50
	Quarter Round	A-106	1 x 6	152
	Cove Base Corner	UC-106	1 x 1	40
	Counter/Chair Rail	26-CRWL	2 x 6	36
	Counter Rail Corner	22-CRCN	2 x 2	24

SHADE VARIATION



HIGH (V3)

Color variation from tile to tile and within each tile.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
5/16"	3/16" (Floor), 1/16" (Wall), 1/8" (Mosaics)

DYNAMIC C.O.F. (WET) : 1 & 2

The higher the rating, the higher the slip resistance.

1 < .42

2 ≥ .42

STATIC C.O.F. (WET) : 1 & 3

1 < .50

2 .50 - .59

3 ≥ .60

TEST RESULTS

	ASTM#	FLOOR	WALL	MOSAIC
Water Absorption	C373	< 3.0%	< 20.0%	< 3.0%
Breaking Strength	C648	250 lbs	120-200 lbs	> 250
Scratch Hardness	MOHS	8.0	4.0-6.5	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant
Dynamic C.O.F.	A137.1	≥ 0.42	Wet: < 0.42	≥ 0.42
Coefficient of Friction	C1028	Wet: ≥ 0.60 Dry: ≥ 0.70	Wet: < 0.50 Dry: ≥ 0.80	Wet: ≥ 0.60 Dry: ≥ 0.65
Abrasion Resistance	C1027	4	4	4

BRANCACCI™

GLAZED CERAMIC



floor • wall • countertop



daltile
greenworks™
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.



POST CONSUMER
RECYCLED MATERIALS



PRE CONSUMER
RECYCLED MATERIALS



7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about Daltile products and services, visit our website at daltile.com

©2012 Dal-Tile Corporation (10/12) SSDBRANCAC