

COLORBODY™ PORCELAIN

CAPPPELLA™



 **daltile**[®]
DESIGN WITH CONFIDENCE™

CAPPELLA™

COLORBODY™ PORCELAIN



floor • wall • countertop

Perhaps no other ColorBody porcelain floor captures the beauty and history of ancient Greece better than Cappella. Featuring the most popular colors inspired by marble, Cappella creates a dramatic impression with its distinctive veining characteristics and a smooth polished surface. Larger sizes make Cappella an ideal choice for residential foyers, living rooms and bathrooms



Photo features Gardini Blanco 12 x 12 field tile in a diamond pattern on the wall.

CAPPELLA™

COLORBODY™ PORCELAIN

floor • wall • countertop

Field Tile



ADRIANA CREME CE10



GARDINI BLANCO CE11

Backsplash Design Ideas



Backsplash features Adriana Creme 12 x 12 field tile with Fashion Accents 2 x 2 Petifour accent in Almond.

CREATIVE IDEAS

Color



ADRIANA CREME CE10



GARDINI BLANCO CE11

Accent



MASSALIA
PEWTER MS90
Frieze Accent Strip



BRANCACCI
ARIA IVORY BC01
Arched Listello


Pattern Ideas



BRICK PATTERN



HOPSCOTCH PATTERN

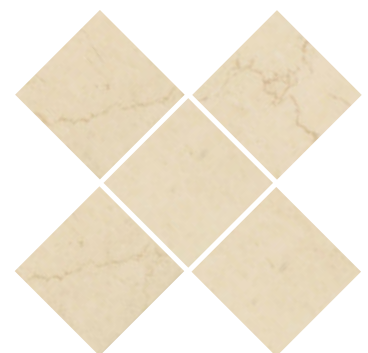

DIAMOND PATTERN

SIZES

		SQ.FT. CARTON	PCS. PER CARTON
24 x 24 Field Tile	(24" x 24") (60.0 cm x 60.0 cm)	15.49	4
12 x 12 Field Tile	(11-13/16" x 11-13/16") (29.7 cm x 29.7 cm)	10.55	11

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C		

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓			
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed.

NOTES

Manufacturer Warning: These tiles have a dynamic coefficient of friction less than 0.42 as measured by the DCOF Acutest method. Tiles with DCOF Acutest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall or personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com/section6.2.2.1.10.html/.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Special care needs to be given when installing tiles 20" and larger. Please refer to www.daltileproducts.com/LargeTiles for information.


Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Bullnose	S-44C9	4 x 12	30

SHADE VARIATION



INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
5/16"	1/8"

DYNAMIC C.O.F. (WET) : 1

The higher the rating, the higher the slip resistance.

1 < .42
2 ≥ .42

STATIC C.O.F. (WET) : 2

1 < .50
2 .50 - .59
3 ≥ .60

TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	8.5
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	< 0.42
Static C.O.F.	C1028	Wet: ≥ 0.50 Dry: ≥ 0.7
Abrasion Resistance	C1027	4

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.



By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.

