




Family: Quebec | Item No. 1291 IB



Drawing 1 - Fixture Mounting

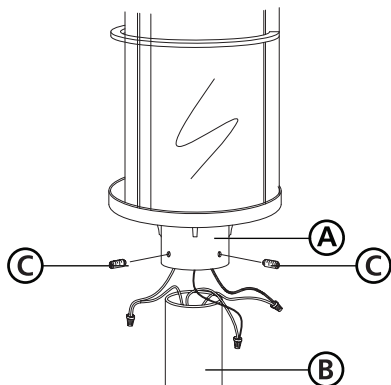

Drawing 2 - Glass Replacement

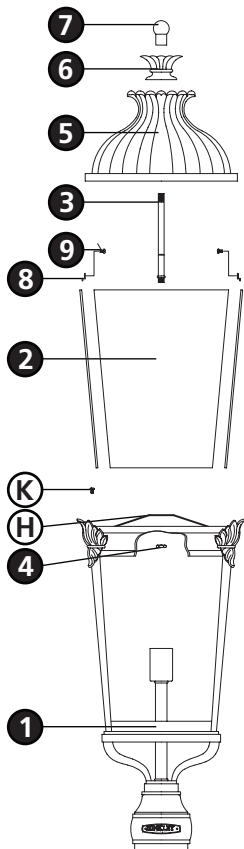

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first installing the glass, assembling the fixture, making all necessary electrical connections, and then mounting the fixture to the pole.**

2

1. To install glass, remove cross bar (H) by removing screws (K) with a Phillips screw driver - see **Drawing 2**.
2. Remove glass clips (8) from inside cage assembly (1) by removing screw (9) with a Phillips screwdriver.
3. Slip glass panels (2) into cage assembly (1).
4. Replace glass clips (8) and screws (9).
5. Slip center stem (3) into center hole of bracket (H) removed earlier and secure it with hex nut (4).
6. Fixture can now be lamped accordingly.
7. To assemble fixture, slip roof (5) onto center stem (3) and down onto cage assembly (1).
8. Slip break (6) onto center stem (3).
9. Thread knob (7) onto end of center stem (3) to secure roof.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. After wiring connections are complete, slip post fitter (A) over top of pre-installed post (B) making sure all wire connections are tucked inside the pole - see **Drawing 1**.
2. When fixture is slipped over pole make sure no wires are being pinched between the top edge of the pole and the inside of the post fitter.
3. Thread the 3 set screws (C) into pre-tapped holes in post fitter.
4. Tighten screw (C) to secure fixture to post.

Note: Maximum wattage for 1291 fixture is 100 watts per bulb.

2.7.08