


Model

DH304020

Description

- Ceramic disc valves
- 3 hole mount, 4" – 12" centers
- Touch down drain assembly
- Quick connect spout and valve with flex hose
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 60 psi

Flow Rate

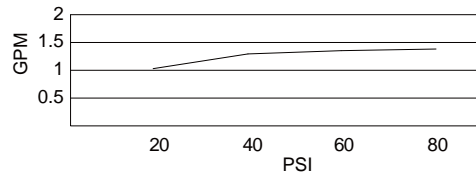

Standards



Certified to NSF/ANSI 61 Section 9

- NSF 61-9
- Energy Policy Act of 1992



Certified by IAPMO R&T



NSF/ANSI 372

- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372



- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Finishes Available

- Chrome
- Other: Refer to H+C Waterware website for additional finish

Warranty

H+C waterware products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

