

Model

DH454520

Description

- Ceramic disc valve
- 2-function spray/ aerated stream pull-down spout
- Single hole mount
- Pull-down hose with spring assist retraction system
- Quick connect spout and valve with flex hose
- A112.18.1M, 2.2 gpm (8.3 LPM) maximum flow rate @ 60 psi

Standards



- NSF 61-9
- Energy Policy Act of 1992




- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372



- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty

H+C waterware products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

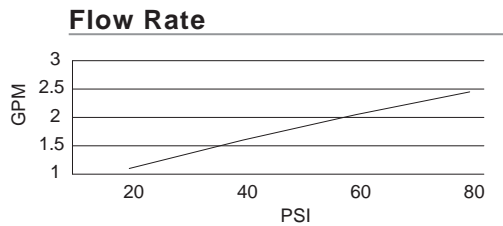

Finishes Available

- Chrome
- Other: Refer to H+C Waterware website for additional finish

