

Model

DH301025

Description

- Ceramic disc valves
- 3 hole mount, 4" centers
- Pop-up drain assembly
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 60 psi

Standards



- NSF 61-9
- Energy Policy Act of 1992



- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372




- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty

H+C waterware products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate

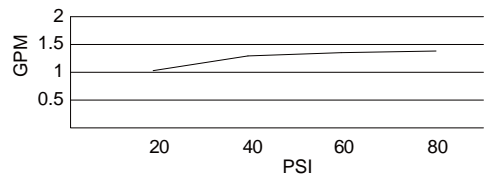

Finishes Available

- Chrome
- Other: Refer to H+C Waterware website for additional finish

