
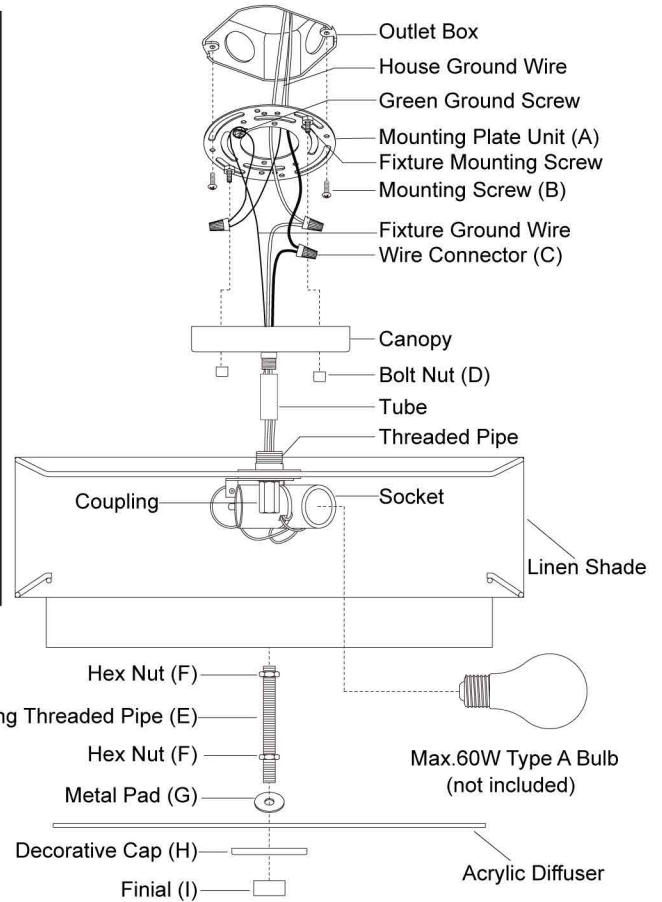


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTIONS.

Hardware Package (included):

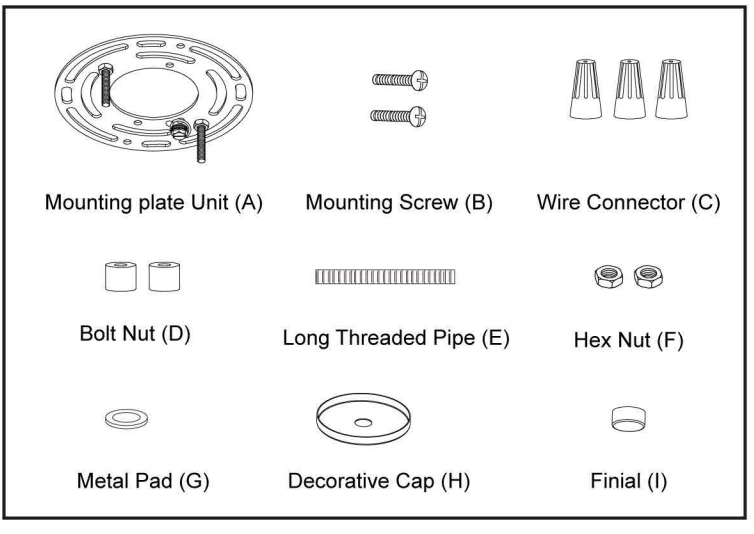

Installation Steps

Turn off the power at fuse or circuit box

1. Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
2. Thread the fixture wire through the tube and the canopy.
3. Attach one end of the tube to the canopy, then connect the other end to the threaded pipe of the fixture.
4. Install 3 x 60W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.
5. Attach the long threaded pipe (E) to coupling, then secure the preinstalled hex nut (F).
6. Attach the hex nut (F) and the metal pad (G) to the long threaded pipe (E), slip the acrylic diffuser and decorative cap (H) up through the long threaded pipe (E), then secure them with the finial (I).
NOTE: The depth of the lower hex nut (F) and the metal pad (G) in long threaded pipe may need to be adjusted to properly fit the acrylic diffuser. The acrylic diffuser should be flatly laid on three brackets, and the frosted side of the acrylic diffuser should be faced down.
7. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
 - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
 - Attach the fixture ground wire (bare wire) to the mounting plate with the green ground screw, or connect to the source ground wire if available.Carefully put the wires back into the outlet box.



Turn on the power at fuse or circuit box

8. Attach the canopy to the mounting plate unit (A) by inserting the fixture mounting screws, then secure it with two bolt nuts (D).

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

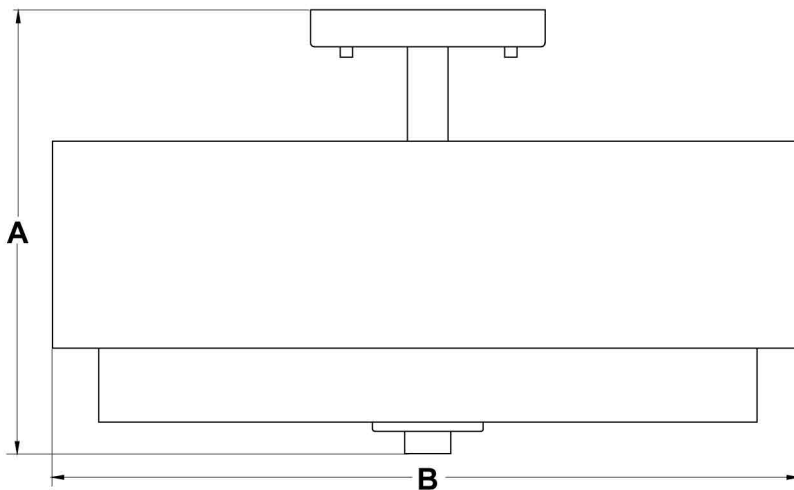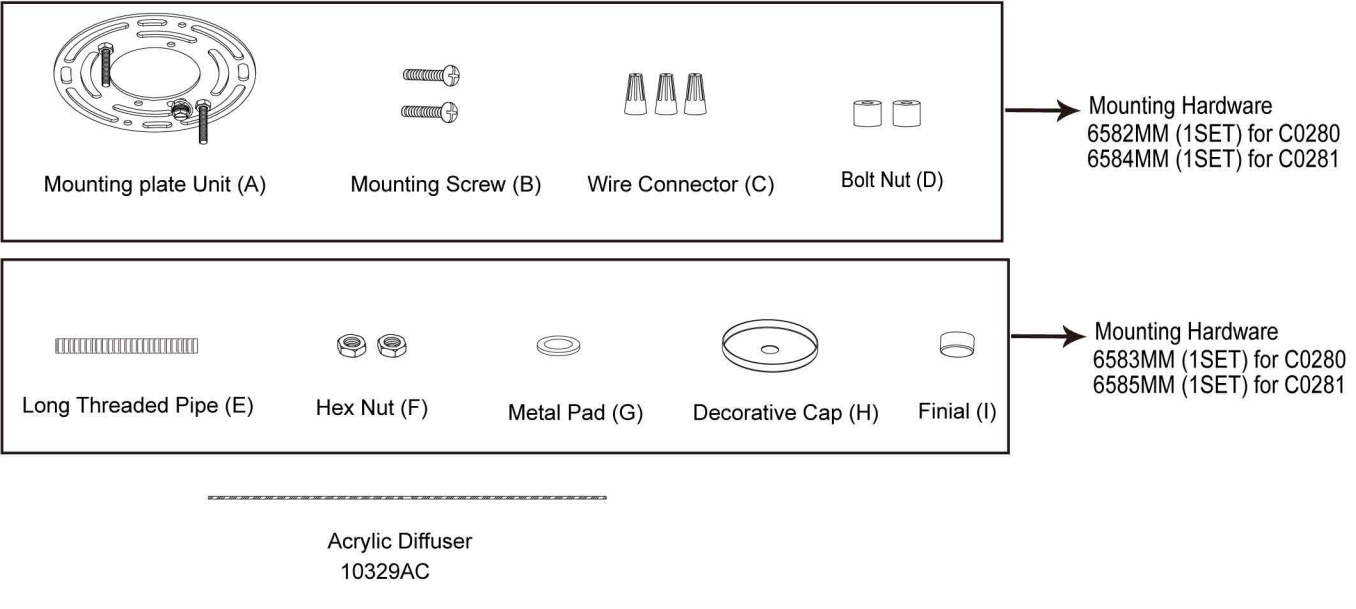

A: 16"

B: 9"