




QAP403

QUICK ADAPT PENDANTS
LOW VOLTAGE

Type	
Project	
Catalog No.	

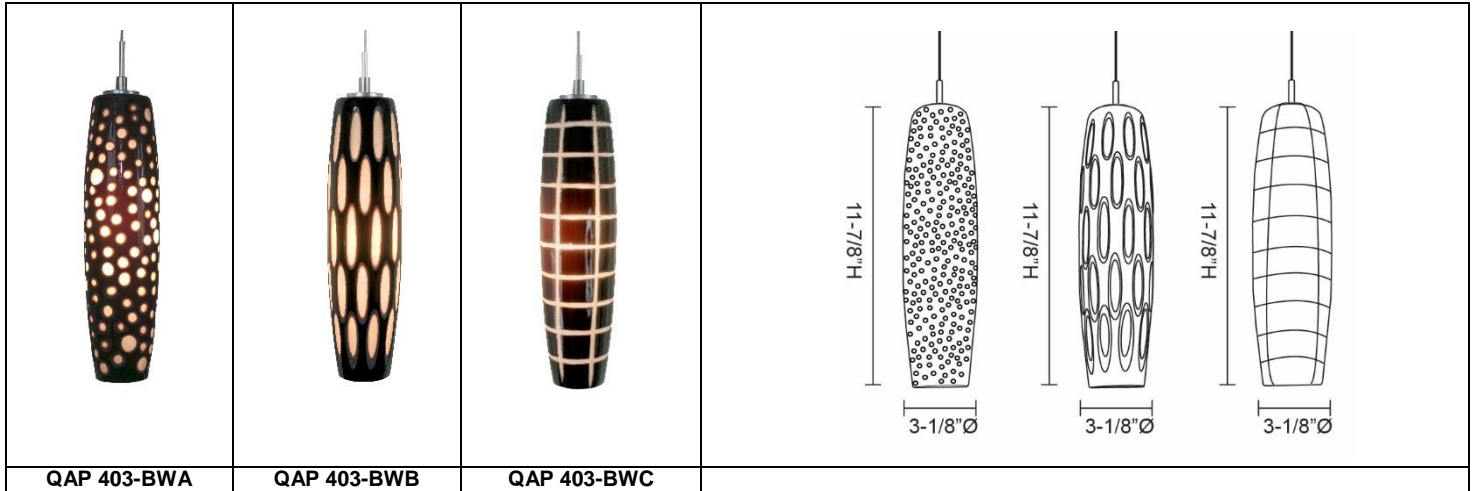

DESCRIPTION

Handcrafted triplex cased glass with opaque black exterior, frosted mid-layer and opal interior. The black exterior is hand-chisel away to reveal the frosted layer and reveal light through these cut outs. No two alike.

Quick Adapt Pendant includes a Quick Adapt Jack, 8' cable, socket assembly, hang-straight tube, and Xenon Bi-Pin 12V 50W lamp. Cable may be field-cut.

May be used with JESCO Monorail Systems, Standard Track Systems, or with Monopoint/Multipoint Systems – See COMPATIBLE SYSTEMS.

SPECIFICATIONS

Input Voltage	12 VAC
Wattage	Up to 50W
Socket set	QASS32X (included and pre-installed)
Lamp*	Xenon Bi-Pin 12V 50W (included)
Dimensions	11-7/8"H x 3-1/8" Ø
Environment	Indoor - Dry
Certifications	ETL Listed

*Optional: 24V lamp, requires appropriate power supply (not supplied).

ORDERING INSTRUCTIONS

MODEL QAP403	-	GLASS FINISH BWA – Dense Circles BWB – Oblong Circles BWC – Grooves	/	SOCKET FINISH BZ – Bronze CH – Chrome SN – Satin Nickel
------------------------	---	---	---	---

Example: QAP403-BWA/CH

COMPATIBLE SYSTEMS

MONOPOINT / MULTIPOINT SYSTEM



Quick Adapt Pendants may be directly mounted onto Monopoint or Multipoint canopies which have built-in or remote transformer options.

STANDARD TRACK SYSTEM



The Standard Track Adapter MA-TA-H (sold separately) enables the use of Quick Adapt Pendants in Standard, Line Voltage H-Track Systems. Includes a 50W electronic transformer. Dimmable with an electronic or standard incandescent dimmer.

MONORAIL SYSTEM



The Monorail Fixture Adapter MA-FA (sold separately) provides the connection between the Quick Adapt Pendant to the Monorail.



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.



QAP403

QUICK ADAPT PENDANTS LOW VOLTAGE

Type	
Project	
Catalog No.	

The truly versatile combination of Quick Adapt Pendants surface-mounted on a JESCO Monopoint/Multipoint System enables a designer to fully customize and create a unique lighting solution in any space. Using the Quick Adapt jack, any pendant may be easily inserted into the Mono/Multipoint canopies to create an individual spotlight, or creative groupings of cascading pendants.

Multipoint mounting is perfect for creating light over kitchen counters or illuminating tables. Select from a variety of single-light through four-light canopies in square, rectangular and round shapes, with integral or remote 12V transformers.



QAC-1R

Transformer: (1) 12V 50W Included
Dims: 5 1/2" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-2R

Transformer: (2) 12V 50W Included
Dims: 14 1/4" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-3R

Transformer: (3) 12V 50W Included
Dims: 24 7/8" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-4R

Transformer: (4) 12V 50W Included
Dims: 35 1/2" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-4S

Transformer: (4) 12V 50W Included
Dims: 10 5/8" L x 10 5/8" W x 1 7/8" H
Finish: SN



QAC-1C

Transformer: (1) 12V 50W Included
Dims: 4 1/2" Ø x 2" H
Finish: BZ, CH, SN



QAC-1C-RT

Transformer: (1) 12V 50W remote transformer required (sold separately)
Dims: 4 1/2" Ø x 5/8" H
Finish: BZ, CH, SN
 Supplied with 18" lead wire and 2 wire AMP connector. Built-in Housing adjusts to ceiling thickness.



QAC-1C-RTH

Transformer: (1) 12V 50W remote transformer required (sold separately)
Dims: 2 7/8" Ø x 2" H
Finish: CH, SN
 Supplied with 18" lead wire and 2 wire AMP connector. Built-in housing adjusts to ceiling thickness.



QAC-3C

Transformer: (3) 12V 50W Included
Dims: 8" Ø x 2 1/4" H
Finish: CH, SN