

SPECIFICATIONS

COBALT™ 2 PIECE HIGH EFFICIENCY TOILET

Model

DC063330 (2 Piece High Efficiency Toilet Bowl)
 DC062321 (2 Piece High Efficiency Toilet Tank)

Description


- 3" flush valve technology with Fluidmaster® pilot valve
- Elongated bowl with 12" rough-in
- 16 7/8" rim height
- Fully glazed trapway
- Water consumption rating: 1.28 gpf (4.8 Lpf)
- Accessories included: matching color bolt caps (for Model # DC063330) and matching color side mounted tank lever (for Model # DC062321)



Standards



• UPC



• ASME A112.19.2



• CSA B45.1



• ADA Accessibility Guidelines for Buildings and Facilities - 4.16 Water Closets

Warranty

Five Year Limited Warranty (Vitreous China)

Technical Information


Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf / 4.8 Lpf
Trapway	2 1/8" (5.4 cm)
Water depth from rim	5 7/8" (14.9 cm)
Water area	6 3/4" (17.2 cm) x 10 5/8" (27.0 cm)
Seat post hole centers	5 1/2" (14 cm)
Operating static pressure range	20 to 80 psi

Recommended Accessories

Model	Description	Finish
D490005BC	Soft-close elongated toilet seat	Biscuit
D490005WH	Soft-close elongated toilet seat	White

Colors Available

- White (WH)
- Biscuit (BC)

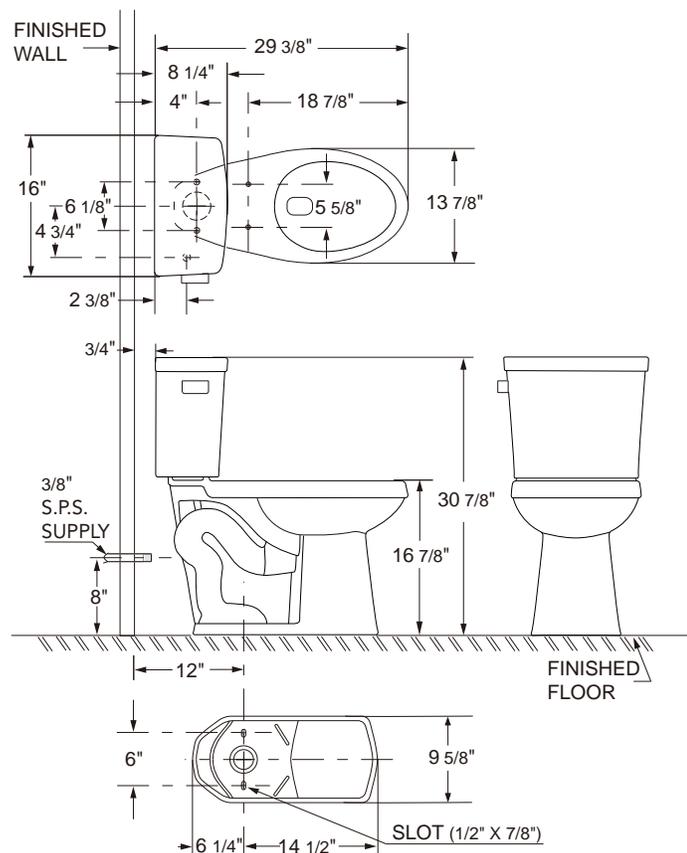

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ASME Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Submittal Information:

Job Name: _____
 Contractor: _____

Location: _____
 Contact #: _____