

# **SPECIFICATIONS**

# TWO HANDLE WALL MOUNT LAVATORY FAUCET

#### Description

- Beautiful ribbon water pattern from spout
- Two handle with concealed deck
- 10" spout with brass drain assembly
- Three hole wall mount

## Flow & Valving


See Chart


#### Standards

- ASME A112.18.1
- CSA B125
- NSF 61-9
- Listed IAPMO/UPC
- Energy policy act of 1992
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

### Warranty

Danze faucets are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



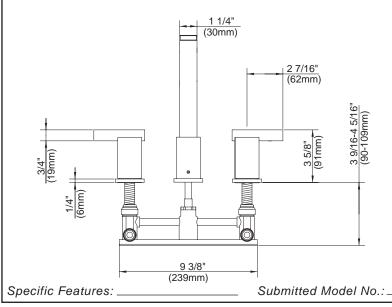

ė

60

FLOW RATE CHART

40

D301644 Sirius™

20

GPM

3

2.5

2

1.5 1


#### Available Colors & Finish

- ChromeBrushed Nickel (BN)
- Brushed Nickel (BN)


Trim Kits : (for use w/ rough-in valves) D301644T

#### **Special Packaging**

- This product also available with trim and valve packaged separately.
- Use with rough-in valve D106100BT:
- Combination 1/2" copper sweat/IPS connection
- Model numbers for trim kit items include the suffix "T"



80 PSI



Danze, Inc., 2500 Internationale Parkway, Woodridge, IL 60517, USA