

SPECIFICATIONS

OPULENCE™ SINGLE HANDLE PRESSURE BALANCE TUB & SHOWER FAUCET

Model

D502157

Description

- Single handle w/4" bell showerhead
- · Cast slip-fit spout
- Diverter on valve (Tub & Shower only)
- · Back to back installation capabilities

Standards



- UPC/cUPC
- Energy policy act of 1992



• ASME A112.18.1



• CSA B125



• ASSE 1016




 ADA Accessibility Guidelines for Buildings and Facilities -4.27.4 Controls and Mechanisms

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate



Trim Kits:

(for use w/pressure balance valves)
D502157T (Tub/Shower trim)
D502757T (Shower only trim)
D500657T (Tub trim w/valve escutcheon)
D500457T (Valve only escutcheon trim w/diverter)
D510457T (Valve only escutcheon trim w/o diverter)

Special Packaging

- This product also available with valve packaged separate from trim.
- Tub & Shower and Valve Only Escutcheon w/Diverter Trim Kit - use w/valve: D113000BT (w/diverter & stops)
- Shower Only & Tub & Valve Only Escutcheon w/o Diverter Trim Kit - use w/valve: D112000BT (w/stops) or D115000BT (w/o stops)
- Pressure Balance Valves are combination 1/2" copper sweat, 1/2" NPT threaded connectors for all ports.




Finishes Available


- Chrome
- Other:Refer to Price List for additional finish


With Diverter & Stops: D502157 (Tub/Shower)

With Stops:

D502757 (Shower only)

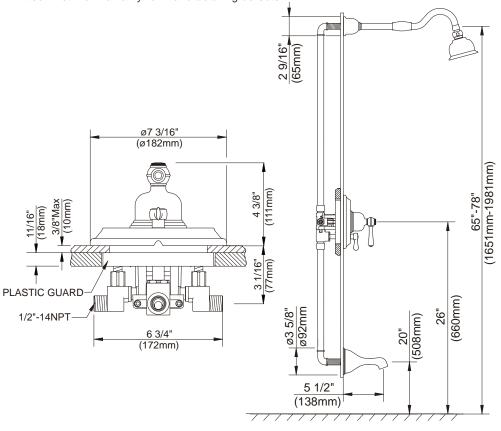





Submittal Information:

Job Name: ______


Location: _____




SPECIFICATIONS

OPULENCE™ SINGLE HANDLE PRESSURE BALANCE TUB & SHOWER FAUCET

Critical Dimensions: Rough-in valve D112000BT (w/stops) & D115000BT (w/o stops)

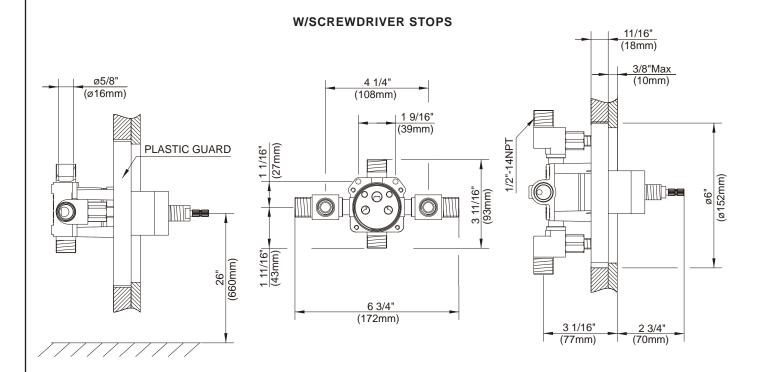

W/DIVERTER & STOPS

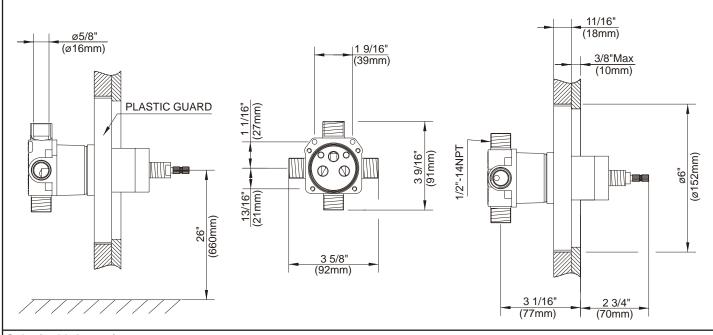

Submittal	Inf	ormati	ion:
-----------	-----	--------	------

Job Name:LocateContractor:Contractor

Location: _____