

SPECIFICATIONS

SINGLE HANDLE 3/4" THERMOSTATIC VALVE

Description

- 4-port thermostatic valve with isolation stops, duplicate filters, high flow rate
- Scald protection, meets ASSE 1016, with temperature limit stop
- Controls temperature
- Matching collection trim included
- Requires separate shut off / volume control valve
- 3/4" FIP inlets and outlets

Flow & Valving

See Chart

Standards

- ASME A112.18.1
- CSA B125
- ASME 1016
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities 4.27.4 Controls and Mechanisms

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.





Available Colors & Finish


- Chrome
- Brushed Nickel (BN)

Trim Kit:


(for use w/ 1 handle 3/4" thermostatic shower valve) D562044T

Special Packaging

 Model umbers for trim kit items include the suffix "T"



Ė

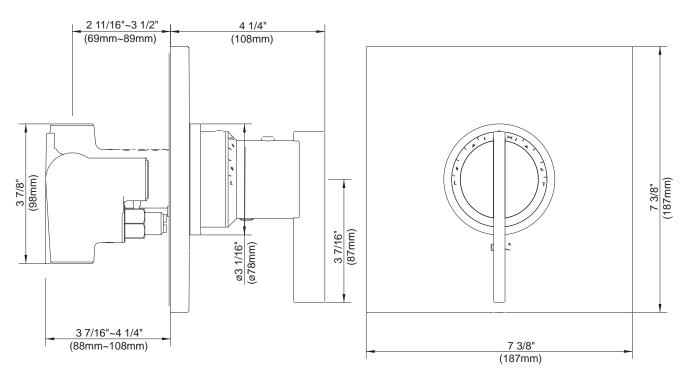

Specific Features: _

Submitted Model No.: _