

# INSTALLATION INSTRUCTIONS


## S601



1. Configure design and layout of the system before attempting to install this product.
2. Install mounting clips (S601-MC) or channel (S601-CH6) to the mounting surface. If using S601-CH6, use one screw per foot. Do not use a screw head diameter larger than 1/8". For 45 deg installations use grooved side of S601-CH6 for mounting screws.
3. Insert S601 into mounting clips (S601-MC) or channel (S601-CH6). If using S601-CH6, insert included channel clips over the S601 fixture.
4. Connect the power connector (S601-PC or S601-PC-HW) to the S601.
5. Connect the power supply (For use with Jesco DL-PS-xx/24 Class 2 power unit) to the power connector (S601-PC or S601-PC-HW). If using S601-PC-HW ensure wire polarity is correct (positive to positive, negative to negative).
6. Turn the power on. Check all fixtures to make sure they are running properly. If fixtures are not running properly, check all connections.

**Optional** – Fixtures can be connected end to end for a seamless connection. For cable connection use S601-CC

Note : 20 linear feet max

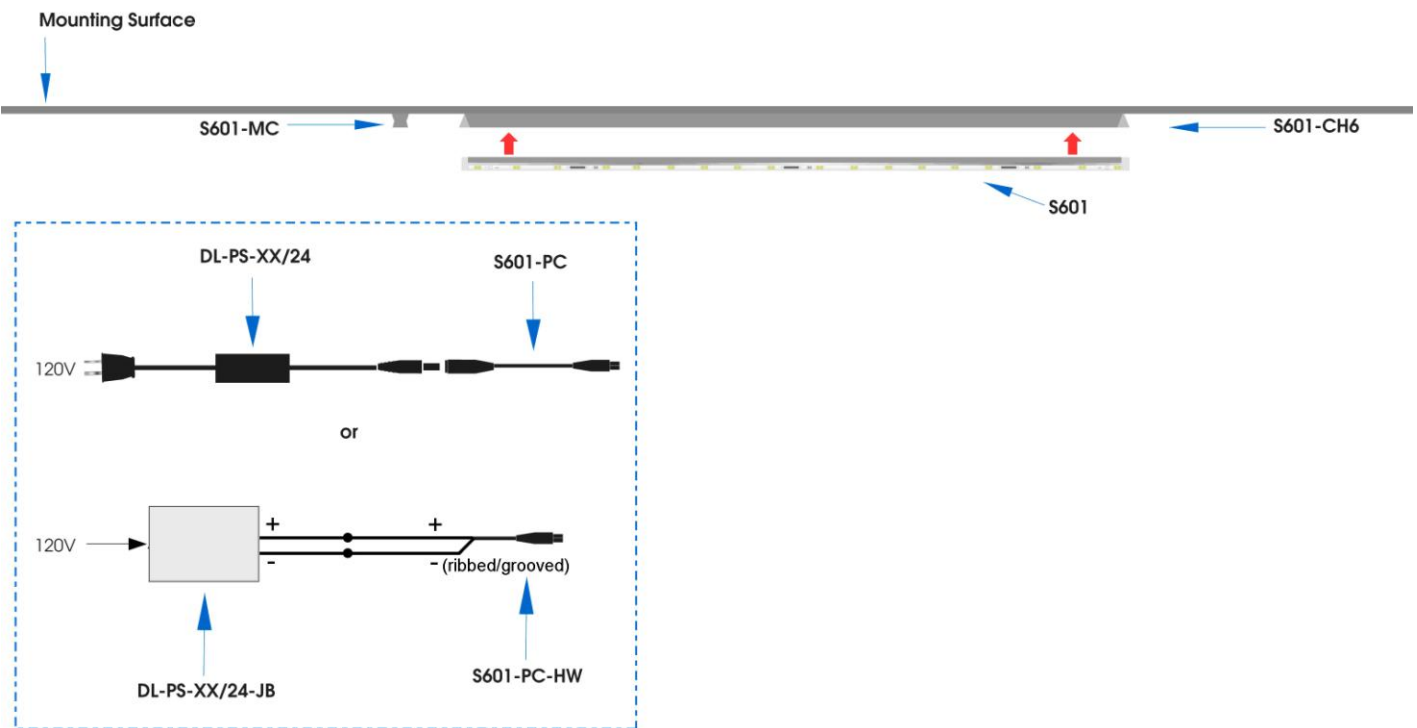

# INSTALLATION INSTRUCTIONS

S601



---

## SAVE THESE INSTRUCTIONS

### IMPORTANT SAFETY INSTRUCTIONS

When installing or using this product, basic safety precautions should always be followed including the following:

1. Read all instructions before attempting to install this product.
2. Ensure main power is off before installing or wiring this product.
3. Ensure correct voltage is being used for this product.
4. Disconnect electrical power before adding to or changing the configuration of this product.
5. Do not install this LED fixture in damp or wet locations.
6. Fixtures must be installed by a licensed electrician in accordance with all national and local electrical and construction codes and regulations.