

Tub and Shower

TRIM ONLY for Tub and Dual Shower unit w/standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower-requires separate order of R10700-UNWS Rough-in

Model No: T13H922-25






- ASME A112.18.1 / CSA B125.1
- Pressure Balance Valve ASSE 1016
- Lindicates compliance to ICC/ANSI A117.1
- Pressure Balance and Diverter lever handles ADA compliant to ICC/ANSI A117.1/ADA
- Handshower backflow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3
- Handshower ADA compliant to ICC/ANSI A117.1/ADA
- (Contact Delta Representative for State and/or Local Approvals)

- Polished chrome plated finish Pressure Balance cartridge Temperature only controlled with handle - Field adjustable to limit handle rotation into hot water zone
- Integral checks in the cartridge prevent crossflow between Hot and Cold
- Non-Removable Bige/Red visual cover indicator for Cold. Mixing and Hot handle positions
- Standard 24" Slide Bar handshower and shower diverter valve with diverter spour-backhow protection provided by two integral check valves in
- PARISEOWARADIA COmpliant Histogram I sandland OPTIONAL Handshower
- #andshower MAX:1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- Handshower MIN:1q13rG FrMt @ 45 PSL 443 L/mina@ 310 kPa) provide a
- small but 902 tipes useful spowerful trickle) when the "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure
- Variatie#s2n thetalalterviene+lamether-class/spessinpthenpositionmo(3h&35)nower temperature control handle while in "PAUSE" mode could result in dramatic Onlinger to the manufacture of the ward when the shower hand the shower had the shower hand the shower had the shower had
- Hanges the lemperature of the water when the shower head of the Wife (1974) (1
- AL WAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your
- #208/PRIVITE PRIVITE WATER FOR I ONCIP NO TO COST POSO (600 LOPHIM @ 310 kPa)
- Optional 3114m notification and the sense of the sense use the "PAUSE" function.

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. leasurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Čheck with local codes for requirements in your area. This spec was produced September 28, 2015.

(I	(Dimensional drawing on following page)		
Delta reserves the right (1) to make changes to specifications Measurement may very plus or minus 6mm/0.75° Mounties b	and materials, and (2) to change or discontinue models, both without notice or obligation. locations are suggested only. Check with local codes for requirements in your area. This	Dimensions are for reference.	



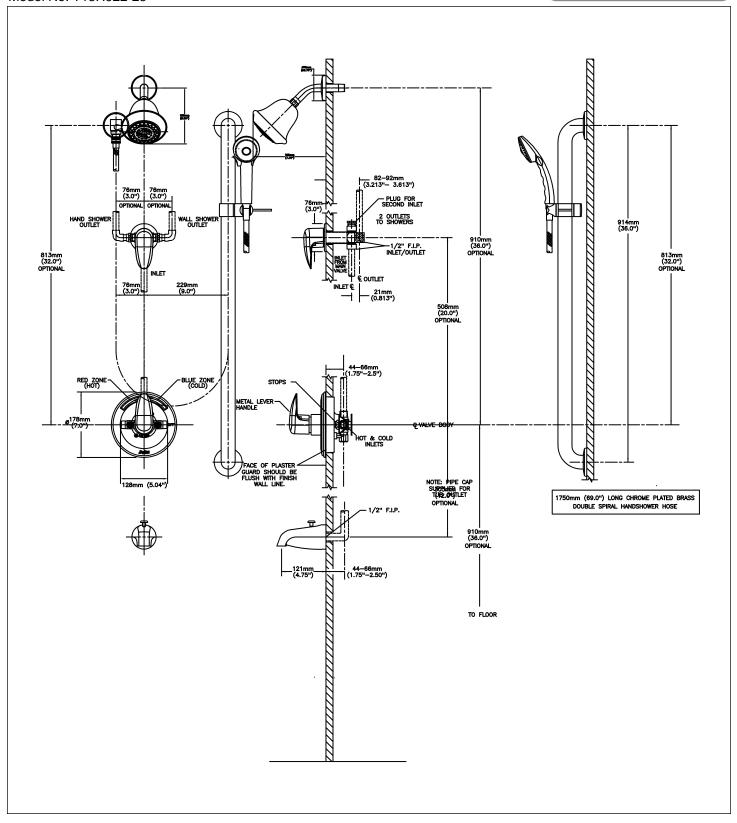

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 28, 2015.