

Tub and Shower

TRIM ONLY for Tub and Dual Shower unit w/standard 24" Slide Bar handshower and shower diverter valve with diverter spout-backflow protection provided by two integral check valves in handshower-requires separate order of R10700-UNWS Rough-in

Model No: T13H932-25






- ASME A112.18.1 / CSA B125.1
- Pressure Balance Valve ASSE 1016
- Lindicates compliance to ICC/ANSI A117.1
- Pressure Balance and Diverter lever handles ADA compliant to ICC/ANSI A117.1/ADA
- Handshower backflow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3
- Handshower ADA compliant to ICC/ANSI A117.1/ADA
- (Contact Delta Representative for State and/or Local Approvals)

- Polished chrome plated finish Pressure Balance cartridge Temperature only controlled with handle - Field adjustable to limit handle rotation into hot water zone
- Integral checks in the cartridge prevent crossflow between Hot and Cold
- Non-Removable Bige/Red visual cover indicator for Cold. Mixing and Hot handle positions
- Standard 24" Slide Bar handshower and shower diverter valve with diverter spour-backhow protection provided by two integral check valves in
- #andshower MAX:1.5 GPM @ 80 PSI (5.7 L/min @ 552 kPa)
- Handshower MIN:113 GPM @ 45 PSL (4.3 L/min @ 310 kPa) provide a
- smalltbut 900 tipes us flaws flow the third trickle) when the "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure
- Variatie#s2n fille tarbitierviene Handler-class Ages incition to a 50 mo (3h.235) hower
- remperature control handle while in "PAUSE" mode could result in dramatic changes to file แก้ perature in the manufacture of the ward whether the showed has been part of the manufacture of the ward whether the showed has been the showed has been the showed to file whether the showed has been the showed to file whether the showed has been the showed to file whether the showed has been the showed the show
- ALWAYS point the shower head away from yourself when returning to the "Shower Flow Rate the water with your hand before resuming your
- #BOSYPETATION OF THE WATER WATER THE WATER THE
- Optional 3114m not 361 per tein deserge and of indighten doung the session of the control of t use the "PAUSE" function.

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. leasurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Čheck with local codes for requirements in your area. This spec was produced September 28, 2015.

(I	(Dimensional drawing on following page)		
Delta reserves the right (1) to make changes to specifications Measurement may very plus or minus 6mm/0.75° Mounties b	and materials, and (2) to change or discontinue models, both without notice or obligation. locations are suggested only. Check with local codes for requirements in your area. This	Dimensions are for reference.	



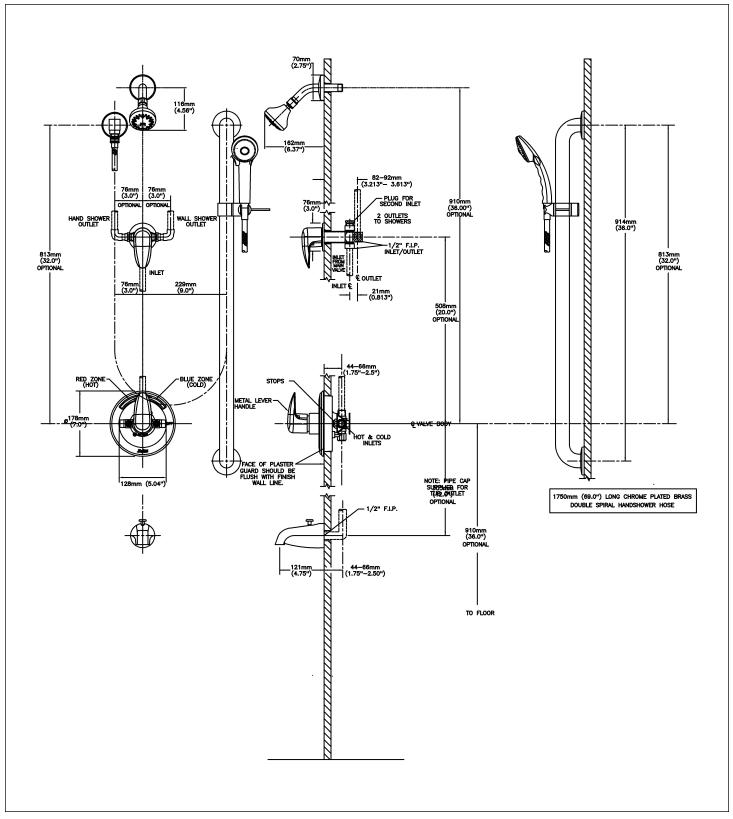

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 28, 2015.