

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE
























To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed


Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|--------------------|---|----------|-------|----------------|---|----------|
| A | mounting bracket |  | 1X | M | T5 hex nut |  | 1X |
| B | green ground screw |  | 1X | N | Screw |  | 6X |
| C | machine screw |  | 2X | O | central rod |  | 1X |
| D | wire connector |  | 3X | P | metal tube |  | 1X |
| E | collar loop |  | 1X | R | ball nut |  | 6X |
| F | canopy |  | 1X | S | wooden strip |  | 6X |
| G | out ring |  | 1X | T | screw unit |  | 6X |
| H | chain |  | 1X | U | bulb |  | 6X |
| I | fixture loop |  | 1X | V | candle sleeves |  | 6X |
| J | cup |  | 2X | W | fixture body |  | 1X |
| K | T3 hex nut |  | 2X | | | | |
| L | metal plate |  | 2X | Y | finial |  | 1X |

JONATHAN Y

Model#: JYL9519A

Product Dimensions: 28.5"D X26"H

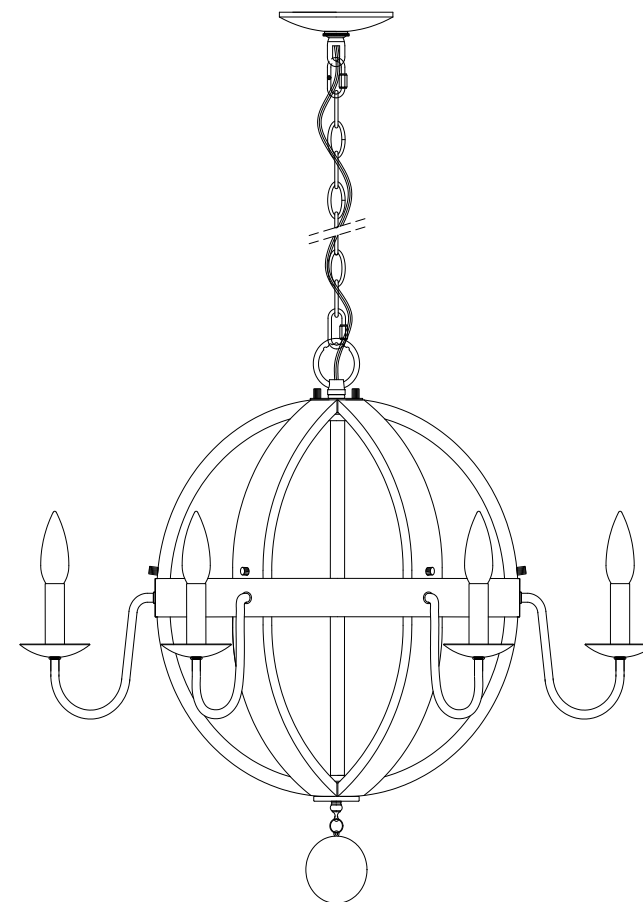


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 20 minutes.

1. Attach the metal tube (P) to the fixture (Q), then fix the metal plate unit (N) to the central rod (O) with cup (J) and T5 hex nut (M).
2. Align the bottom wooden strip (S) to the metal plate (N1), fix it with screw (T). Then align the top of wooden strip (S) to metal plate (L), thread the screw (N) through metal plate (L), secure with ball nut (R).
3. Secure the metal plate (L) by T3 hex nut (K) and cup (J), finally fix by fixture loop (I).

| Connect, Hot, Black or Red Outlet Supply Wire to: | Connect, Neutral, White Outlet Supply Wire to: |
|--|---|
| Black | White |
| * Parallel Cord (round & smooth) | * Parallel Cord (square & ridged) |
| Clear, Brown, Gold or Black without Tracer (colored stripes) | Clear, Brown, Gold or Black with Tracer (colored stripes) |
| Insulated Wire (not green) with copper metal conductor | Insulated Wire (not green) with Silver metal conductor. |



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
 - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.
4. Attach the mounting bracket (A) to the junction box with machine screw (C).
 5. Fix the collar loop (E) to the mounting bracket (A).
 6. Thread the chain (H) through the out ring (G) and canopy (F), then lock it to the collar loop (E) and t fixture body (I) by using the chain links.
 7. Connect the wire with wire connector (D).
 8. Attach the collar loop (E) to the canopy (F) with out ring (G).
 9. Place the candle sleeves (V) to the socket, then install the bulb (U) to the socket.
 10. Attach the finial (Y) to the bottom of fixture.

PLEASE USE TYPE"B" BULB H MAX 40-WATT OR CFL BULB MAX 9-WATT OR LED 9-WATT BULB, THERE ARE 6PCS 4-WATT LED BULBS IN THE BOX

ENJOY YOUR LAMP

