Wallmount Sink Faucets



Approval:



Specification: (example)

- CAST BRASS two handle wallmount sink faucet
- Polished chrome plated finish
- BRASS swing spout
- Supplied with adjustable centers 175 mm to 235 mm (6.87" to 9.25")
- ADA compliant color indexed 102 mm (4") metal hooded blade handles with vandal resistant screws
- Control mechanism is a 1/4 turn cylinder type with brass stem, stainless steel plate and replaceable non-metallic seats

and ... with ... (add spout required)



Date:

DESCRIPTION PRODUCT NO.			
Less integral stops	28P4	0	2



	SPOUT			OUTLET		HAN	DLE
		/			/		✓
0			0	Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator		o	
1			1			1	
2	239 mm (9.4") Tubular Swing Spout		2			2 102 mm (4") Hooded Blade Handles	
3			3			3	
4	205 mm (8.06") Tubular Swing Spout		4			4	
5			5			5	
6			6			6	
7			7			7	
8			8			8	
9	205 mm (8.06") Tubular Swing Gooseneck Spout		9			9	

Note: The ONLY spouts available are those shown above. Refer to www.specselect.com for individual models. Flowrates are at 60 PSI. Note: Use this page front and back as a product submittal sheet.



TECK® COMMERCIAL


E


Wallmount Sink Faucets

Approvals:

- CSA certified
- Complies to ASME A112.18.1
- Hooded Blade Handle No.2
 ADA Compliant and meet
 Handicapped Accessibility
 Standard ASME A117.1 of less than
 5 lbs. operating force.
- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)



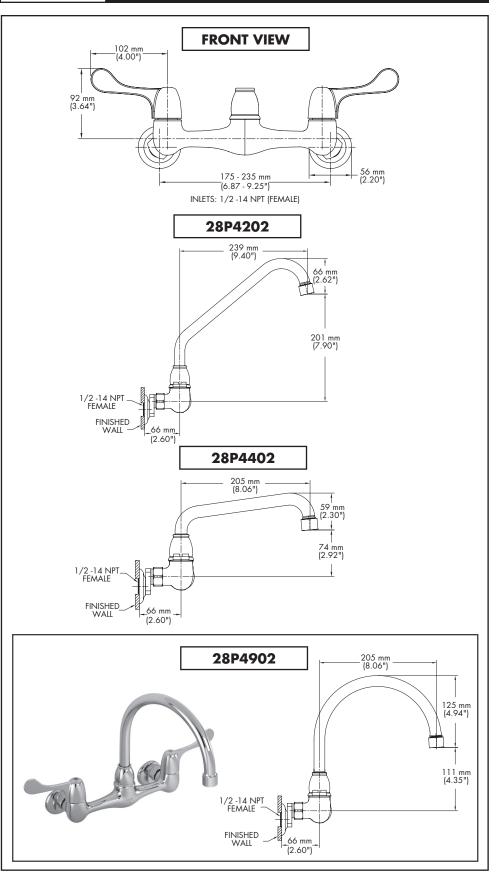

INLETS - 1/2" FIP

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.