



Submitted Model No.: **Specific Features:**



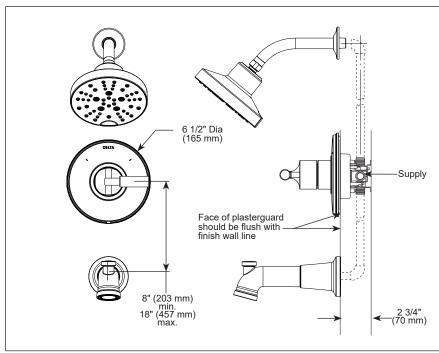

▲Designate Proper Finish Suffix

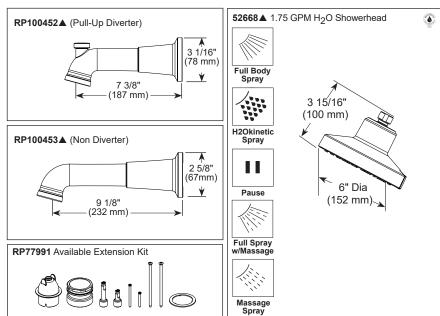

see what Delta can do **TUB AND SHOWER**

FAUCET TRIM

- Bowery[™] Bath Collection
- Valve Only (T14048)
- Shower Only (T14248)
- Tub/Shower (T14448)

FEATURES:

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Five-setting H₂Okinetic® Technology showerhead

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body. (R10000 Series)
- Back-to-back installation capability.
- Temperature only controlled with handle.
- · Field adjustable to limit handle rotation into hot water zone.
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- Maximum 1.75 qpm @ 80 psi, 7.60 L/min @ 550 kPa.
- Tub port max flow rate 6.0 gpm at 60 psi withR10000-UNBX
- Red/blue pad print temperature indicator on the shower escutcheon.
- "-LHD" models indicate less showerhead.
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness.
- Shower arm overall horizontal length = 7" (178mm), including threaded ends

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

ASME A112.18.1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1-Valve control only.

EPA WaterSense®