


#### Submitted Model No.: Specific Features:



▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

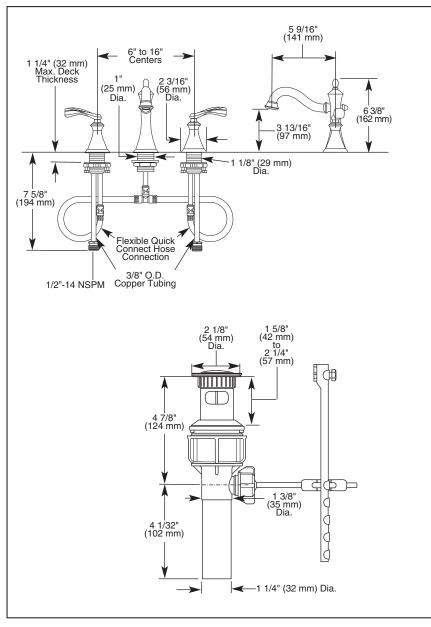

# LAVATORY FAUCETS

- New Victorian<sup>®</sup> Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers
- Quick Snap<sup>®</sup> Installation

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated end valve and spout bodies.
- Widespread 6" (152mm) to 16" (406 mm) centers.
- 5 9/16" (141 mm) long, 6 3/8" (162 mm) high, rigid spout.
- Quick Snap<sup>®</sup> Installation
- 1/4 turn handle stops
- Hot and cold stems are interchangeable.
- Control mechanism is the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Models have metal drain with pop-up type fitting with plated flange and stopper.
- Maximum flowrate 1.5 gpm @ 60 PSI.


### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to
- Verified to <0.25% Pb average wetted surface regulations.



55 E. 111th Street, Indianapolis, Indiana 95 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2009 Masco Corooration of Indiana