

WARNING

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

* Please make sure that you have all parts indicated before you begin assembly of this item















* This item should be assembled on a soft surface to prevent scratching the finish during assembly

* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation

*The external flexible cable or cord of this luminaire cannot be replaced

If the cord is damaged, the luminaire shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	H	Center rod		1X
B	Outlet box screw		2X	I	Marble shade		1X
C	Canopy nut		2X	J	Plastic washer		1X
D	Wire Nut		3X	K	Metal washer		1X
E	Canopy		1X	L	Hex nut		1X
F	Center rod		1X	M	Finial		1X
G	Fixture body		1X	N	Bulb		2X

JONATHAN Y

Model#: JYL1205

Product Dimensions: 11.875"L x 11.875W" 10.625"H

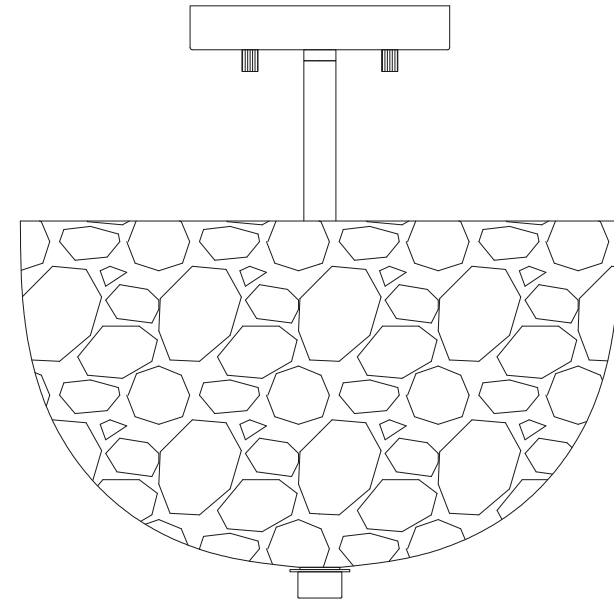

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 30 minutes.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com

1. Tighten Center rod (F) and Center rod (H) to Fixture body(G), then fix Canopy(E) to Center rod (F).
2. Place plastic washer(J) to Center rod(H) and then install Marble shade(I) on, place Metal washer to the bottom ends of Center rod(H), then tighten by Hex nut(L), final fix Finial(M)
3. Install bulbs (N) on each sockets.
4. Attach the mounting plate (A) to the junction box (not included) with the two outlet box screws(B), then connect wires with Wire Nut(D)

clockwise till tight.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.




*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

5. Thread Canopy(E) through the mounting screws, then fasten by using Canopy nut (C).
specified on this fixture. Make sure that electrical current is turned off before changing bulbs.

**PLEASE USE TYPE "A" BULB MAX 40-WATT OR LED MAX 9-WATT
THERE ARE 2 X 4W LED BULBS IN THE BOX.**

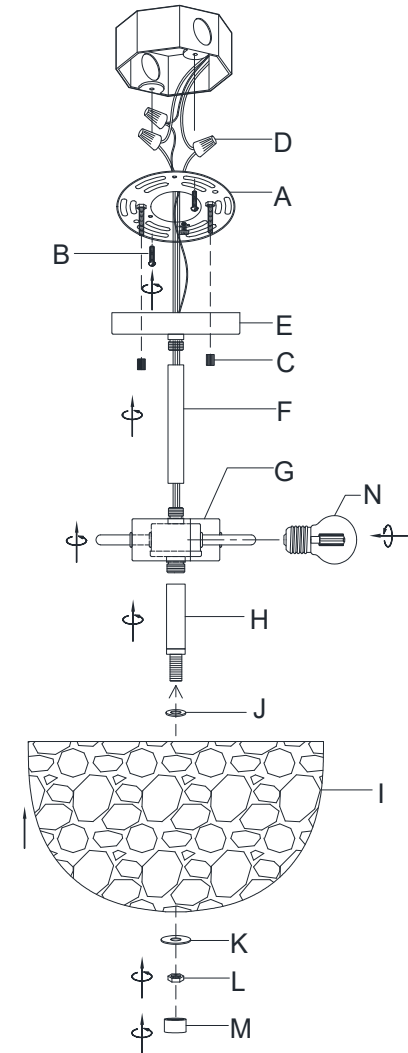

ENJOY YOUR LAMP