


Submitted Model No.: _ Specific Features:



▲ Designate proper finish suffix

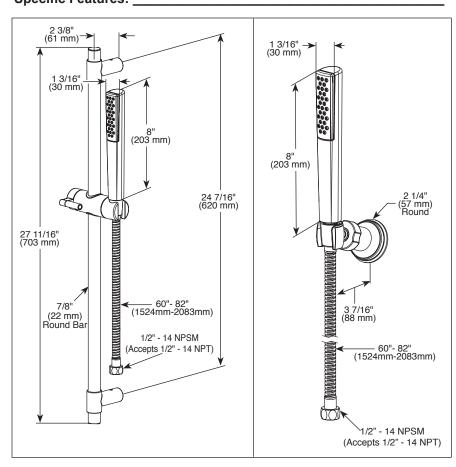

see what Delta can do

HAND SHOWER

■ 1-Spray Setting Hand Shower

FEATURES:

- Touch-Clean® Nozzles
- Lumicoat™ Finish (-PR models only)
- Lumicoat[™] Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Certified dual check valves for backflow protection
- 60"-82"(1524 mm-2083 mm) stretchable metal hose
- 27 11/16" (703 mm) wall bar with adjustable slide (allows for adjustable shower height), not to be used as a grab bar- 51808 **▲** only
- Wall mount bracket for hands-free showering 55808▲ only
- Ball connector swivel angle is 36° (18° per side) -55808 **▲** only
- Lumicoat[™] is not applied to the slide bar or shower hose

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A 112.18.1 / CSA B125.1 ◆
- ASME A 112.18.3
- EPA WaterSense[®]
- Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.