



**Surgeon Scrub-Up** 

Pedal Valve

Model No: 54T5322A-R7

**COMPLIES WITH:** 

- CSA certified.
- Complies to ASME Standard A112.18.1.
- IAPMO listed
- (Contact Delta Representative for State and/or Local Approvals)
- Long foot pedals ADA compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs operating force





## SPECIFICATION:


- Foot Pedal Mixing Valve
- Spout: R7 Gooseneck spout-9.0" radius-12.7" height(unmounted)-Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant.090" wall thickness
- Outlet#: 2 Vandal Resistant Laminar Flow Outlet- 1.5 USGPM (5.7 L/Min) flow rate at 60 psi- with Antimicrobial by AgION™
- Forged brass wallmount self close foot pedal valve
- Two aluminum indexed pedals
- · Polished chrome plated finish
- With inlet stops
- With outlet volume control stop
- Set screw wall flanges
- Wallmount brass turret
- · With vandal resistant locking lugs,
- 3/8" IPS shank, and locknut

## **OPERATION:**

Not Available

(Dimensional drawing on following page)



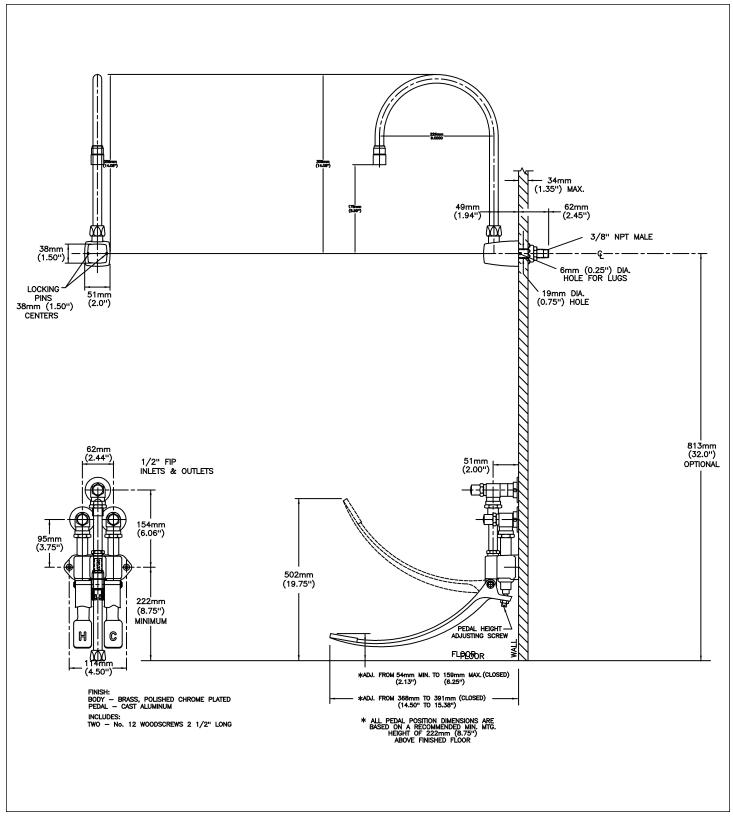

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference.

Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 02, 2011.