



Submitted Model No.:

Specific Features:

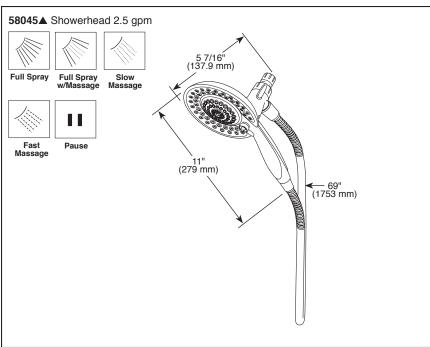

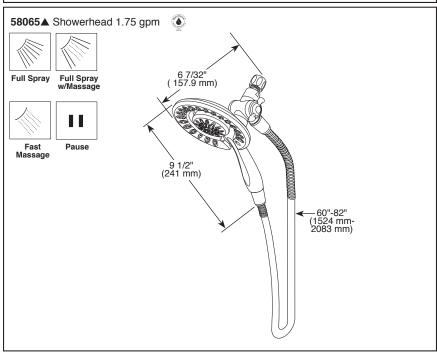

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



see what Delta can do



- 2-In-1 Shower
- Certified Dual Check Valves

STANDARD SPECIFICATIONS:

- Max 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (58045)
- Max 1.75 qpm @ 80 psi, 6.6 L/min @ 550 kPa (58065)
- Integrated handshower docks securely into showerhead
- Multiple spray settings and pause feature pause is a non-positive shut off
- 69" (1753 mm) ultra flex hose (58045)
- 60" 82" (1524 mm 2083 mm) stretchable metal hose (58065)
- Diverter allows for single or shared operation of showerhead and handshower

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- EPA WaterSense®
- Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3, CSA B125.1 and ASME A112.18.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta Faucet Company

55 E. I I I th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2017 Delta Faucet Company