


Submitted Model No.:_____

Specific Features:



▲ Designate proper finish suffix

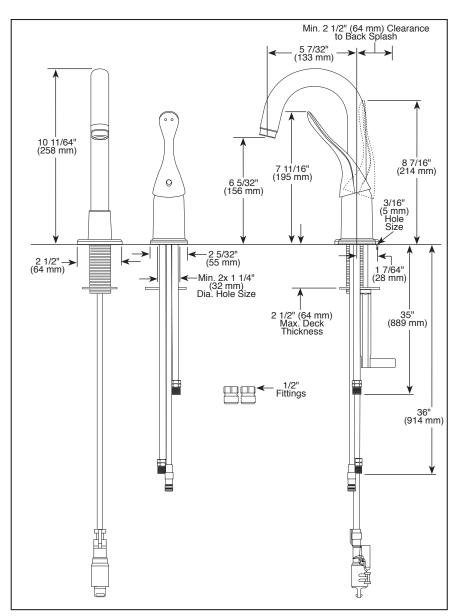

BAR & PREP SINK FAUCETS

- Classic Series
- Single Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Two hole mount
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered copper supply lines
- 710LF-HDF locked spout; 711LF-HDF spout rotates 180°
- Red/blue indicator markings
- Additional locking pin for added security of spout to deck

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

