

## **Metering Faucets**

3 Hole 4" single push button metering faucet w/ brass cover plate-0.5 gpm Vandal resistant outlet

Model No: 86T0104

**COMPLIES WITH:** 

- CSA certified.
- Complies to ASME Standard A112.18.1/CSA B125.1.
- Verified compliant with 0.25% weighted average Pb content regulations
- Verified compliant with 0.25% weighted average Pb content regulations
- (Contact Delta Representative for State and/or Local Approvals)



## **NOTES:**

Verified compliant with 0.25% weighted average Pb content regulations

## **SPECIFICATION:**

- Single push button non-mixing metering faucet
- With cast brass cover plate
- 3 hole 4" centers(faucet does not lock to coverplate)
- Vandal resistant push button
- 4.25" long rigid spout
- Vandal resistant 0.5GPM (1.9L/min) flow control non-aerating spray outlet
- Polished chrome plate finish
- Slow close cartridge


## **OPERATION:**

Not Available

(Dimensional drawing on following page)



-FACTORY SET FOR 9 TO 16 SECOND CYCLE AT 50 PSI -TOTAL FLOW <u>NOT</u> TO EXCEED 0.25 US GPM PER PUSH BUTTON ACTIVATION

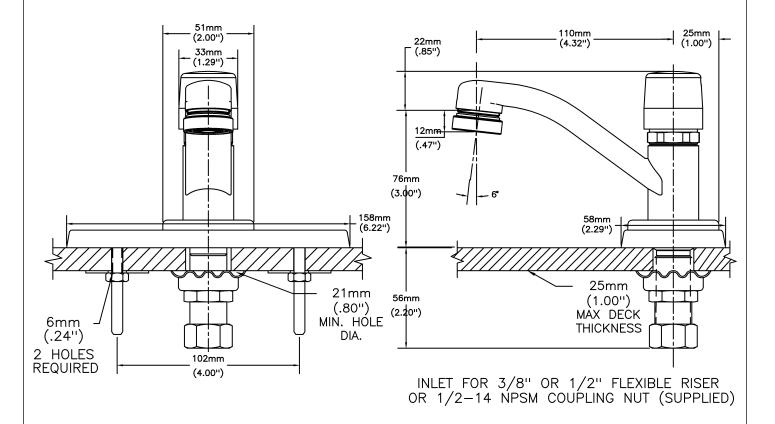

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced March 21, 2014.